

[Manuals.plus](#) /

> [Arcchio](#) /

> Arcchio Jora LED Wall Light Instruction Manual

Arcchio 9626329

Arcchio Jora LED Wall Light

Model: 9626329

INTRODUCTION

The Arcchio Jora LED Wall Light is a modern, linear luminaire designed for versatile use in contemporary living spaces, particularly suitable for bathrooms and other damp areas due to its IP44 protection rating. Its white aluminum housing provides a timeless aesthetic, making it an ideal choice for mirror illumination.

This manual provides essential information for the safe installation, operation, and maintenance of your Arcchio Jora LED Wall Light.

SAFETY INFORMATION

WARNING: Electrical installation should only be performed by a qualified electrician. Ensure the main power supply is switched off before commencing any installation or maintenance work.

- This product is designed for indoor use only.
- The luminaire has an IP44 protection rating, meaning it is protected against solid objects larger than 1mm and against splashing water from any direction. It is suitable for use in bathroom zones 2 and 3.
- Do not attempt to modify the product in any way.
- Keep packaging materials away from children.

PACKAGE CONTENTS

Please check that all components are present and undamaged before installation.

- 1 x Arcchio Jora LED Wall Light (Model: 9626329)
- Integrated LED light source
- Mounting hardware (screws, wall plugs)
- Instruction Manual

SPECIFICATIONS

Feature	Detail
Brand	Arcchio
Model Number	9626329
Dimensions (L x W x H)	90 cm x 10 cm x 4 cm
Weight	2 kg
Material	Aluminium, Acrylic, Iron
Color	White / Opal
Light Source	Integrated LED
Power Consumption	28 W
Luminous Flux	3750 lm
Color Temperature	3000 K (Warm White)
Color Rendering Index (CRI)	>80
Voltage	230 V
Protection Rating	IP44
Protection Class	I
Energy Efficiency Class	F

For detailed energy efficiency information, please refer to the official EU EPREL database [EPREL Product Page](#)

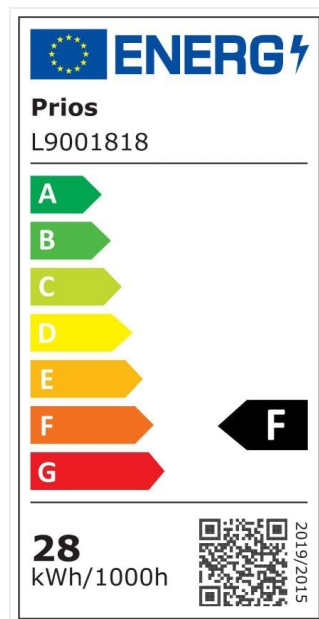


Image: Energy Efficiency Label for the Arcchio Jora LED Wall Light, indicating Class F.

SETUP AND INSTALLATION

Important: Before starting installation, ensure the power supply to the circuit is disconnected at the main fuse box.

1. **Prepare the Mounting Surface:** Choose a suitable location on the wall, ideally above a mirror for optimal illumination. Ensure the surface is clean, dry, and capable of supporting the luminaire's weight.
2. **Mark Drilling Points:** Carefully remove the mounting bracket from the luminaire (if separate). Hold the bracket against the wall at the desired installation height and mark the drilling points using a pencil. Ensure the marks are level.



Image: Technical drawing showing the dimensions of the Arcchio Jora LED Wall Light (900mm length, 100mm depth, 40mm height).

3. **Drill Holes and Insert Wall Plugs:** Drill holes at the marked points using an appropriate drill bit for your wall type. Insert the provided wall plugs into the drilled holes.
4. **Secure the Mounting Bracket:** Attach the mounting bracket to the wall using the provided screws. Ensure it is firmly secured.
5. **Electrical Connection:** Connect the luminaire's electrical wires to your household wiring according to local electrical codes. Typically, this involves connecting the live (brown/black), neutral (blue), and earth (green/yellow) wires. Ensure all connections are secure and properly insulated.



Image: Internal view of the Arcchio Jora LED Wall Light, showing the wiring compartment and integrated LED strip.

6. **Attach the Luminaire:** Carefully attach the main body of the luminaire to the secured mounting bracket. Ensure it

clicks or screws into place securely.

7. **Final Check:** Double-check all connections and ensure the luminaire is securely mounted.

8. **Restore Power:** Once installation is complete, restore power at the main fuse box.



Image: The Arcchio Jora LED Wall Light installed above a bathroom mirror, providing bright, even illumination.

OPERATION

The Arcchio Jora LED Wall Light is designed for simple operation. Once correctly installed and connected to the main power supply, it can be switched on and off using your standard wall switch.

- Ensure the wall switch connected to the luminaire is in the "ON" position.
- The integrated LED light source provides instant, consistent illumination.
- This model does not feature dimming capabilities unless connected to a compatible external dimmer (not included and requires professional installation).

MAINTENANCE

To ensure the longevity and optimal performance of your Arcchio Jora LED Wall Light, follow these simple maintenance guidelines:

- **Cleaning:** Before cleaning, ensure the power supply to the luminaire is switched off. Use a soft, dry, or slightly damp cloth to wipe the surface. Do not use abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish.
- **LED Replacement:** The LED light source is integrated and not user-replaceable. If the LED fails, the entire luminaire should be replaced.
- **Inspection:** Periodically check the luminaire for any signs of damage or loose connections. If any issues are found, disconnect power and consult a qualified electrician.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; faulty wall switch; faulty luminaire.	Check main power supply and fuse. Ensure wall switch is ON. Verify wiring connections (consult electrician). If all else fails, the luminaire may be faulty and require replacement.
Light flickers.	Unstable power supply; loose connection; incompatible dimmer (if applicable).	Check power supply stability. Inspect wiring for loose connections (consult electrician). Ensure no incompatible dimmer is used.
Light is dim.	Power supply issue; luminaire defect.	Verify correct voltage supply. If issue persists, the luminaire may be defective.

For issues not listed above or if solutions do not resolve the problem, please contact Arcchio customer support or a qualified electrician.

RECYCLING AND DISPOSAL

This product contains electronic components and should not be disposed of with general household waste. Please dispose of the product responsibly at designated collection points for electrical and electronic equipment (WEEE) in accordance with local regulations.

For more information on recycling and disposal of lamps, please refer to relevant local guidelines or visit:

- [Recycling of Lamps \(Amazon.de\)](#)
- [Disposal of Broken or Damaged Lamps \(Amazon.de\)](#)

WARRANTY AND SUPPORT

Arcchio products are manufactured to high-quality standards. For warranty information and customer support, please refer to the terms and conditions provided at the point of purchase or visit the official Arcchio website. Keep your proof of purchase for any warranty claims.

For further assistance, you may also contact the seller, Lampenwelt, via their Amazon store page: [Lampenwelt Seller Page](#)

