

[Manuals.plus](#) /

› [HOIGY](#) /

› HOIGY Faucet Supply Lines and Waterfall Faucet User Manual

HOIGY 4094a2bd-c398-49dd-812d-17bdb5148be9

HOIGY Faucet Supply Lines and Waterfall Faucet User Manual

Model: 4094a2bd-c398-49dd-812d-17bdb5148be9

1. INTRODUCTION

Thank you for choosing the HOIGY Faucet Supply Lines and Waterfall Bathroom Sink Faucet. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new plumbing fixtures. Please read this manual thoroughly before installation and retain it for future reference.



Image: The complete HOIGY Waterfall Bathroom Sink Faucet set, including the main faucet body, two handles, a drain stopper, and two braided stainless steel supply lines.

2. SAFETY INFORMATION

- Always turn off the main water supply before beginning any plumbing work.
- Wear appropriate personal protective equipment, such as safety glasses and gloves, during installation.
- Ensure all connections are secure and leak-free before restoring water pressure.
- If you are unsure about any step, consult a qualified plumber.
- Avoid overtightening connections, which can damage threads or components.

3. PACKAGE CONTENTS

Please verify that all components are present before beginning installation:

- Waterfall Bathroom Sink Faucet (Main Body)
- Two (2) Faucet Handles
- Two (2) 30-inch Faucet Supply Lines (3/8" Female Compression x M10 Male Connector)
- Two (2) 1/2" Adapters with Rubber Gaskets
- Drain Stopper (Black)
- Mounting Hardware (Plastic Nut, Washers)



Image: A pair of 30-inch braided stainless steel faucet supply lines with 3/8" female compression fittings and M10 male connectors, alongside two 1/2" adapters.

Enduring Hose | Built to Last

*cUPC Certified Product

*US STANDARD THREAD

30 Inch Length

3/8" Female Compression

M10 Male Connector

Image: Close-up view of the 30-inch supply line, highlighting the 3/8" Female Compression fitting and the M10 Male Connector, confirming cUPC certification and US standard thread.


4. SETUP AND INSTALLATION

This faucet and supply line set is designed for easy installation, typically within 10 minutes, without the need for professional plumbers or specialized tools. Ensure your sink meets the following requirements:


- **Three Holes:** Compatible with 3-hole sinks (4-10 inches spread).
- **Sink Hole Diameter:** 1.1-1.5 inches.
- **Sink Thickness:** 0.1-1.9 inches.

4-Step Installation in 10 Mins



· No need experience · No need plumber · No extra tools · No extra costs

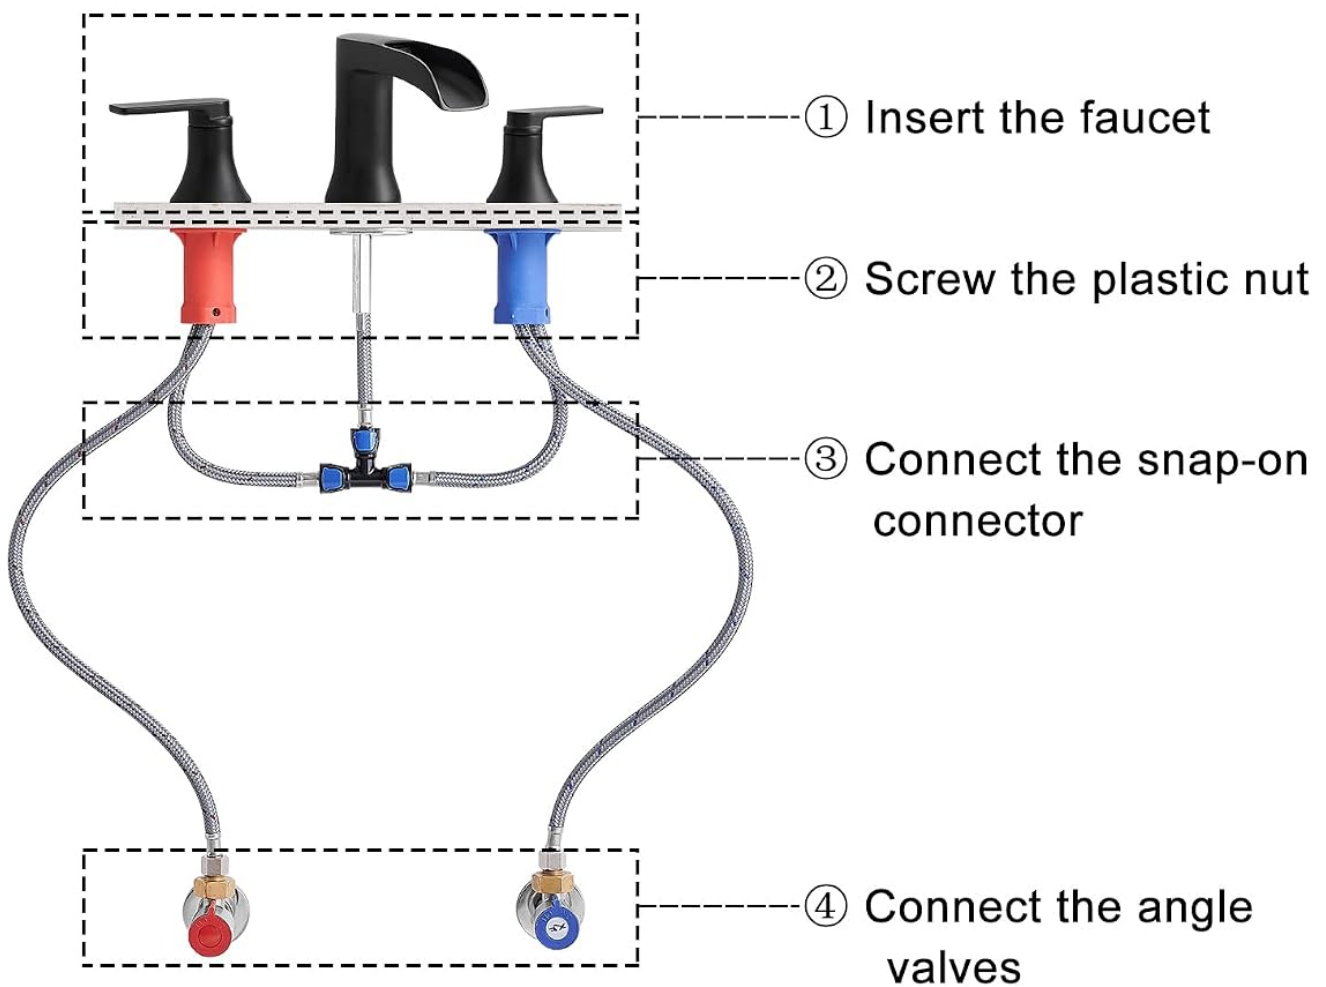

NOTE: Only fit the 3 holes sink

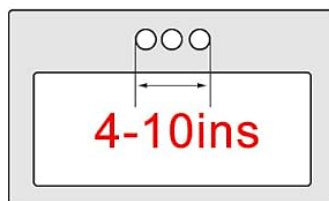

Three Holes ✓

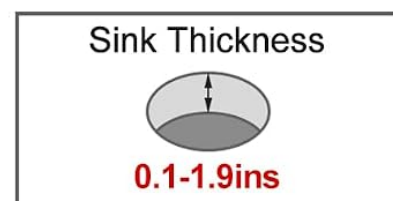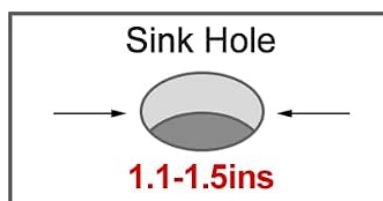

Compliant with US Standards



Image: A detailed diagram illustrating the 4-step installation process for the HOIGY faucet, including sink hole and thickness requirements.

Installation Steps:

1. **Insert the Faucet:** Place the main faucet body and handles into the corresponding holes on your sink deck. Ensure they are properly aligned.
2. **Screw the Plastic Nut:** From underneath the sink, secure the faucet and handles by screwing on the plastic nuts provided. Hand-tighten initially, then use a wrench for a snug fit, but do not overtighten.

3. **Connect the Snap-on Connector:** Attach the snap-on connector of the supply lines to the faucet's inlets. Ensure a secure, leak-free connection.
4. **Connect the Angle Valves:** Connect the other end of the supply lines to your hot and cold water angle valves. The 3/8" female compression thread connects directly. If your angle valves are 1/2", use the provided 1/2" adapters with their matching rubber gaskets for a secure fit.

Quick Setup | All-in-One Solution

*Fit both 3/8" and 1/2" outlet valves



EASY TO TIGHTEN THE NUT



Equipped extra 1/2" adapters with rubber gaskets

Image: Illustration showing how to easily tighten the nut during installation and highlighting the inclusion of extra 1/2" adapters with rubber gaskets for versatile connection.


Leak-Proof Hose | Premium Material

HOIGY

- ✓ PEX Inner
- ✓ Stainless Steel Outer



✗ Others

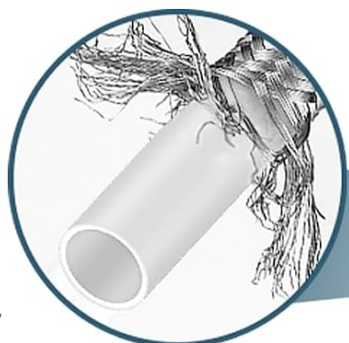

Temperature
Resistance




Health
Material



Lifetime
Protection



No Leak



No Rust

Image: Cross-section view of the HOIGY supply hose, demonstrating its PEX inner tube and braided stainless steel outer layer for leak-proof and durable performance.

5. OPERATING INSTRUCTIONS

The HOIGY Waterfall Bathroom Sink Faucet features two lever handles for controlling hot and cold water flow. Turn the handles to adjust the water temperature and flow rate. The faucet is designed to provide a silent, laminar stream without splashing, thanks to its exclusive 3-layer metal filter and pressure reducer.



Silent Waterfall without Splashing

Exclusive 3 layer metal filter & pressure reducer
to have steady laminar stream



Waterfall



Silent



Laminar
Stream



Other

Image: The HOIGY faucet in operation, demonstrating its silent waterfall and laminar stream, achieved by a 3-layer metal filter and pressure reducer.

6. MAINTENANCE

- **Cleaning:** Clean the faucet regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- **Check for Leaks:** Periodically inspect all connections for any signs of leaks. Tighten connections if necessary, but do not overtighten.
- **Filter Maintenance:** The 3/8" connector features a built-in filter to remove impurities. If water flow decreases, the filter may need cleaning. Turn off the water supply, disconnect the supply line, and clean the filter screen.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Water Leakage	Loose connections, damaged washer, improper installation of supply lines.	Ensure all connections are tight. Check rubber washers for proper seating and replace if damaged. Verify supply lines are not kinked or improperly installed.
Low Water Flow	Clogged filter in supply line connector, kinked supply line, low water pressure from main supply.	Clean the built-in filter in the 3/8" connector. Check supply lines for kinks and straighten if found. Consult local water utility if main pressure is consistently low.
Faucet Handles Stiff	Mineral buildup, internal component issue.	Flush the system. If problem persists, contact customer support.



No Leaks & More Safety

Eliminates any potential water leakage, giving you more assured



Why Does Ours Not Leak?



① Snap-on Connector

Easily lock water and leakage-free



② Fitted Water Hoses

No need to screw by yourself



③ Ceramic Valve

Excellent sealing

Image: Diagram illustrating the leak-prevention features of the HOIGY faucet, including the snap-on connector, fitted water hoses, and ceramic valve for excellent sealing.

8. SPECIFICATIONS

Feature	Detail
Brand	HOIGY
Model Number	4094a2bd-c398-49dd-812d-17bdb5148be9
Recommended Use	Bathroom
Mounting Type	Deck Mount
Finish Type	Brushed
Material	Stainless Steel (Supply Lines), Brass (Faucet Handles)
Color	Black
Number of Handles	2
Special Feature	Rust Resistant
Handle Type	Lever
Supply Line Length	30 inches
Supply Line Connectors	3/8" Female Compression Thread x M10 Male Connector
Certifications	cUPC Certified, Lead-Free

9. WARRANTY AND SUPPORT

For any questions, concerns, or technical assistance regarding your HOIGY Faucet Supply Lines and Waterfall Bathroom Sink Faucet, please contact HOIGY customer support. Refer to your purchase documentation for specific warranty details or visit the official HOIGY store on Amazon.

HOIGY Store: <https://www.amazon.com/stores/HOIGY/page/6340FAAA-DADD-49BD-805E-20304D0FFE6A>

© 2024 HOIGY. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question