

newgarden LUMGRE080NXSWNW

Newgarden Greta 5-in-1 Solar/Rechargeable Lamp Instruction Manual

Model: LUMGRE080NXSWNW

INTRODUCTION

The Newgarden Greta 5-in-1 Solar/Rechargeable Lamp is a versatile lighting solution designed for both indoor and outdoor use. This product features a single lampshade that can be configured into five different lighting types: a sconce light, a table lamp, a floor lamp, a short path light, or a tall path light. It operates on solar power and can also be recharged via Micro-USB. The lamp includes an 80 lumen LED light, offering up to 30 hours of illumination on a full charge. It incorporates an automatic on/off function with a twilight sensor for convenience. Constructed from recycled plastics, the Greta lamp is designed for durability and environmental sustainability.

WHAT'S IN THE BOX

Please verify that all components are present before assembly.

- 1x Greta Lampshade with Solar Panel
- 1x Path Light Spike
- 1x Sconce Light Structure
- 2x Standard Pole
- 1x Short Pole
- 1x Pole Connector
- 1x Lamp Base
- 1x Micro-USB Cable

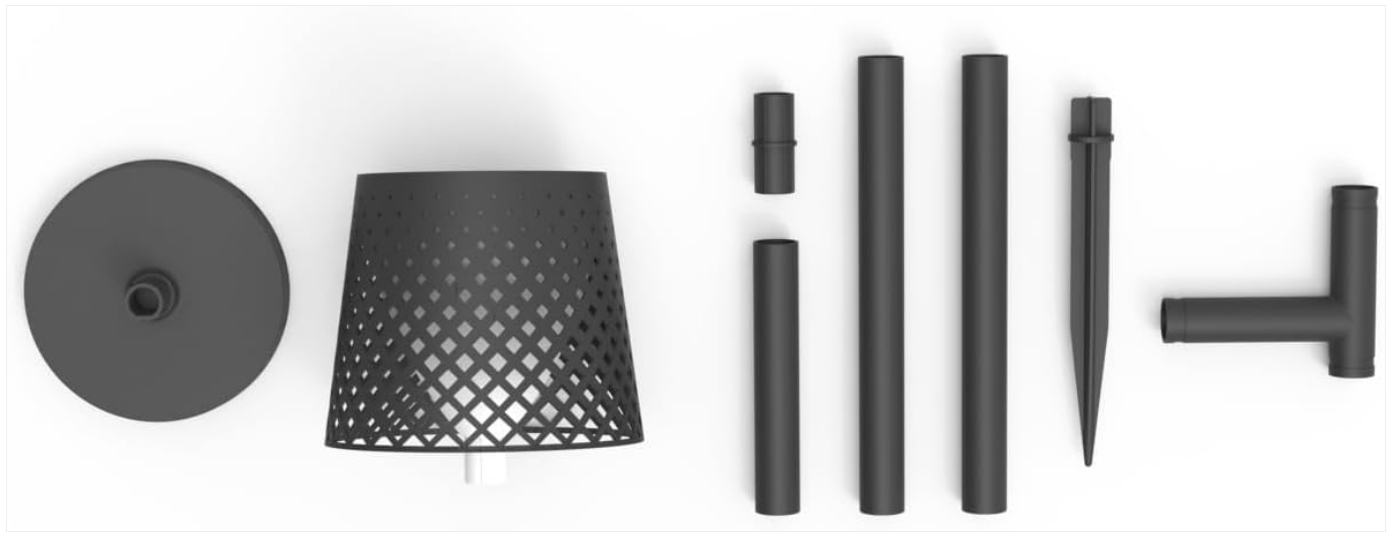


Image: All components included in the Greta 5-in-1 lamp package.

SETUP AND ASSEMBLY

The Greta lamp offers five distinct configurations. Follow the instructions below for your desired setup.

1. Table Lamp Configuration

1. Attach the Greta Lampshade to the Lamp Base.
2. Ensure the connection is secure.



Image: The Greta lamp assembled as a table lamp.

2. Floor Lamp Configuration

1. Connect one Standard Pole to the Lamp Base.
2. Connect the second Standard Pole to the first Standard Pole using the Pole Connector.
3. Attach the Greta Lampshade to the top of the assembled poles.
4. Ensure all connections are secure.



Image: The Greta lamp assembled as a floor lamp.

3. Sconce Light Configuration

1. Attach the Greta Lampshade to the Sconce Light Structure.
2. Mount the Sconce Light Structure to a wall using appropriate hardware (not included).
3. Ensure the structure is securely fastened to the wall.



Image: The Greta lamp assembled as a sconce light.



Image: The Greta sconce light installed on an outdoor wall.

4. Short Path Light Configuration

1. Attach the Short Pole to the Path Light Spike.
2. Connect the Greta Lampshade to the top of the Short Pole.
3. Insert the Path Light Spike firmly into the ground.



Image: The Greta lamp assembled as a short path light.

5. Tall Path Light Configuration

1. Attach one Standard Pole to the Path Light Spike.
2. Connect the Greta Lampshade to the top of the Standard Pole.
3. Insert the Path Light Spike firmly into the ground.



Image: The Greta lamp assembled as a tall path light.



Image: The Greta path light illuminating a garden path.

OPERATING INSTRUCTIONS

Charging the Lamp

The Greta lamp can be charged using two methods:

- **Solar Charging:** Place the lamp in direct sunlight. The integrated solar panel on the lampshade will automatically charge the internal batteries. Charging time is typically 4 to 8 hours depending on sunlight intensity.
- **Micro-USB Charging:** For faster charging or during periods of low sunlight, connect the provided Micro-USB cable to the charging port located on the lamp's base. Connect the other end to a standard USB power adapter (not included). Charging time is approximately 4 to 8 hours.

A full charge provides up to 30 hours of illumination.

Powering On/Off and Modes

The lamp features an on/off switch and an auto mode with a twilight sensor.

- **On/Off Switch:** Locate the power button, typically on the lamp's base or solar panel unit. Press to manually turn the light on or off.
- **Auto Mode (Twilight Sensor):** When in auto mode, the lamp will automatically turn on at dusk and turn off at dawn, conserving battery life. Ensure the solar panel is clean and unobstructed for optimal sensor performance.

MAINTENANCE

The Newgarden Greta lamp is designed for durability and is IP65 waterproof, making it resistant to various weather conditions. To ensure optimal performance and longevity:

- **Cleaning:** Periodically wipe the solar panel and lampshade with a soft, damp cloth to remove dust, dirt, or debris. A clean solar panel ensures efficient charging.
- **Placement:** For solar charging, place the lamp in an area that receives direct sunlight for most of the day. Avoid shaded areas.
- **Storage:** If storing the lamp for an extended period, ensure it is fully charged and store it in a cool, dry place.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Lamp does not turn on.	• Insufficient charge. • On/Off switch is in the "Off" position. • Solar panel is dirty or obstructed. • Twilight sensor not detecting darkness.	• Charge the lamp fully via solar panel or Micro-USB. • Ensure the switch is in the "On" or "Auto" position. • Clean the solar panel. Relocate the lamp to a sunnier spot. • Move the lamp to a darker area or wait for sufficient darkness.
Lamp light is dim or flickers.	• Low battery charge. • Solar panel not receiving enough sunlight.	• Recharge the lamp. • Ensure the solar panel is clean and exposed to direct sunlight.
Lamp does not charge.	• Solar panel is dirty or obstructed. • Not enough direct sunlight. • Micro-USB cable or port issue.	• Clean the solar panel. • Relocate the lamp to an area with more direct sunlight. • Try a different Micro-USB cable or power source.

SPECIFICATIONS

Model Number	LUMGRE080NXSWNW
Brand	Newgarden
Light Source	LED (16 LEDs)
Brightness	80 Lumens
Light Color	Warm White (3000 Kelvin)
Power Source	Solar Powered, Micro-USB Rechargeable
Battery	2x1800mAh Lithium batteries (built-in)
Charging Time	4-8 hours (Solar or Micro-USB)
Operating Time	Up to 30 hours
Material	Recycled PP (Polypropylene) / ABS Plastic
Color	Black
Water Resistance	IP65 Waterproof

Lifetime	> 25,000 hours
Dimensions (Lampshade)	6.3" Diameter x 5.2" H
Overall Dimensions (Approximate)	• Sconce Light: Ø5.51" X 7.8" D X 11"H • Table Lamp: Ø5.51" X 11.81"H • Floor Lamp: Ø5.51" X 25"H • Short Path Light: Ø5.51" X 18"H • Tall Path Light: Ø5.51" X 32"H
Item Weight	0.61 Kilograms

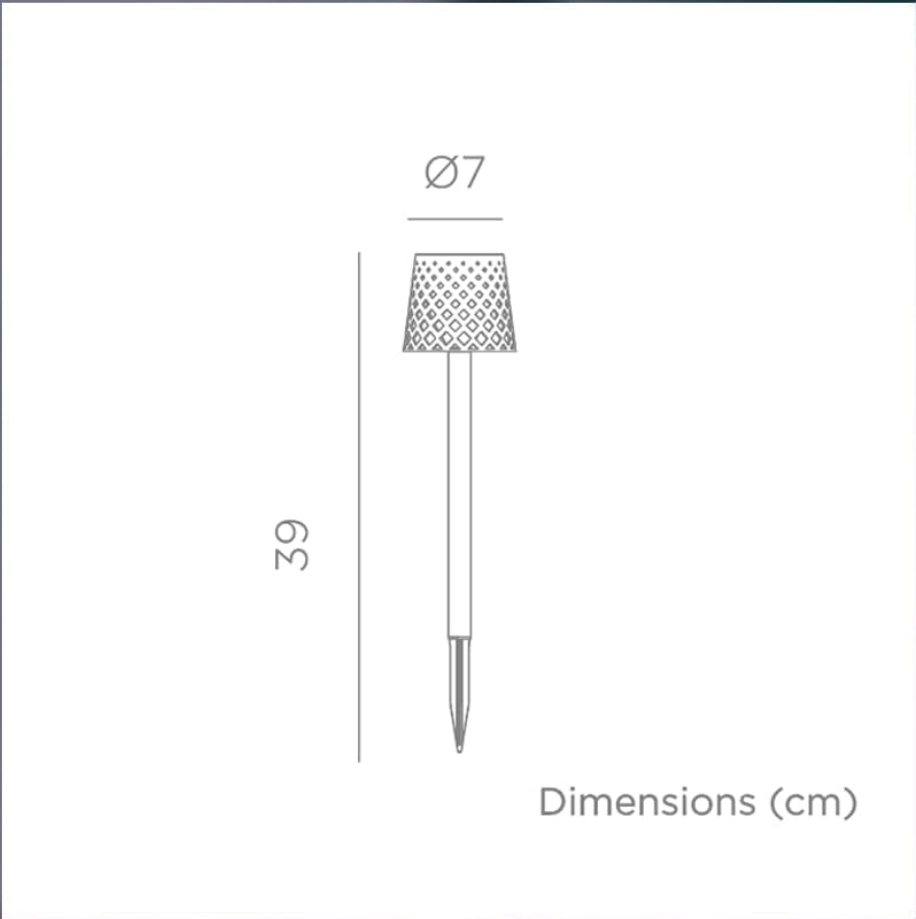


Image: Dimensional diagram for the Greta path light configuration.

WARRANTY AND SUPPORT

Warranty Information

This product comes with a limited warranty. For specific details regarding the warranty period and coverage, please refer to the documentation included with your purchase or contact Newgarden customer support.

Optional protection plans may be available for purchase, offering extended coverage:

- 3-Year Protection Plan
- 4-Year Protection Plan

Customer Support

For technical assistance, troubleshooting not covered in this manual, or warranty claims, please contact Newgarden USA customer support. You can typically find contact information on the product packaging or the official Newgarden website.

Seller: [Newgarden USA](#)

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Email

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Details

[Submit question](#)