

## SOLFART S8580-5T

# SOLFART 5-Light Vintage Vanity Lighting Fixture

Model: S8580-5T

## 1. IMPORTANT SAFETY INFORMATION

Please read these instructions carefully before installation and retain them for future reference. All electrical connections must be in accordance with local codes and ordinances, the National Electric Code (NEC), and ANSI/NFPA 70-1999. If you are unfamiliar with electrical wiring, consult a qualified electrician.

- **WARNING:** To avoid electric shock, disconnect power at the circuit breaker or fuse box before installation or servicing.
- **CAUTION:** Risk of electric shock. Do not install this fixture in wet or damp locations.
- Ensure the fixture is properly grounded.
- Do not exceed the maximum wattage specified for each bulb socket (60 watts).
- Handle glass components with care to prevent breakage.

## 2. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Lighting Fixture Body (with integrated backplate)
- Glass Shades (5 pieces)
- Mounting Hardware (screws, wire nuts, mounting bracket)
- Instruction Manual
- Cotton Gloves (for handling glass shades)



Image: All components of the SOLFART 5-Light Vintage Vanity Lighting Fixture, including the main body, glass shades,

and mounting hardware.

3. SPECIFICATIONS

Feature	Specification
Brand	SOLFART
Model Number	S8580-5T
Color	Bronze Black-Long Base
Material	Glass with Power Coated Matt Black Metal
Product Dimensions	40.6"L x 7.7"W x 7.1"H (1030mm L x 195mm W x 180mm H)
Power Source	Corded Electric
Voltage	110 Volts (AC)
Wattage	Max 300 watts (60 watts per bulb)
Bulb Base	E26
Light Source Type	Compatible with Incandescent, LED, CFL, Halogen
Special Feature	Dimmable (with compatible bulbs and dimmer switch)
Installation Type	Wall Mount
Indoor/Outdoor Usage	Indoor use only



Image: Detailed dimensions of the SOLFART 5-Light Vanity Lighting Fixture, showing length, width, and height.

4. INSTALLATION INSTRUCTIONS

Installation typically takes approximately 15 minutes. Ensure power is disconnected before proceeding.

4.1. Preparation

1. Turn off power at the circuit breaker or fuse box.
2. Carefully unpack the fixture and all components. Place them on a clean, soft surface to prevent scratches.
3. Identify the mounting bracket, fixture body, glass shades, and hardware.

#### 4.2. Mounting the Fixture

4. Attach the mounting bracket to the junction box using the provided screws. Ensure it is securely fastened.
5. The fixture can be installed with the lights facing upwards or downwards. Decide on the desired orientation before proceeding.

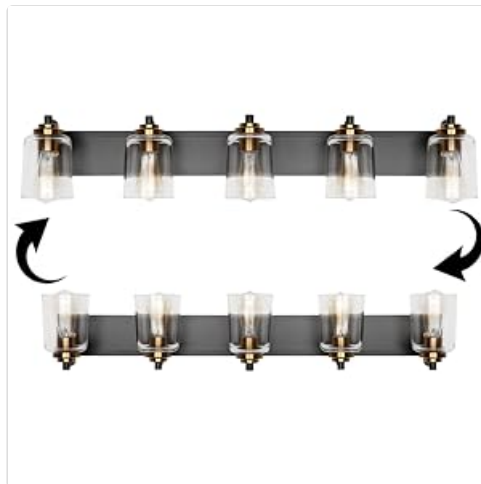


Image: The fixture shown installed in both an upward-facing and downward-facing orientation, demonstrating versatility.

#### 4.3. Connecting Wiring

6. Connect the fixture's wires to the corresponding wires from the junction box using the provided wire nuts:
  - Connect the **black** wire (Live/Hot) from the fixture to the **black** wire from the junction box.
  - Connect the **white** wire (Neutral) from the fixture to the **white** wire from the junction box.
  - Connect the **ground** wire (bare copper or green) from the fixture to the **ground** wire from the junction box.
7. Carefully tuck all wires into the junction box.
8. Align the fixture body with the mounting bracket and secure it with the decorative nuts or screws.

#### 4.4. Attaching Glass Shades and Bulbs

9. Wearing the provided cotton gloves to prevent fingerprints, carefully attach each glass shade to its respective socket. The shades are secured by a robust aluminum securing ring.
10. Insert E26 base bulbs (not included) into each socket. Ensure bulbs do not exceed 60 watts.



Image: A close-up view highlighting the thick, solid glass shade and the durable metal securing ring.

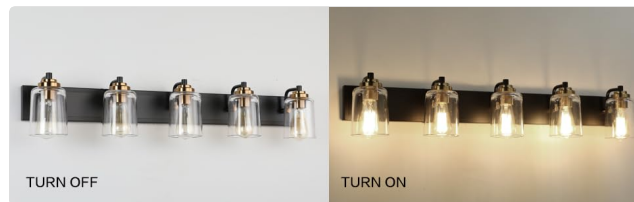


Image: A visual comparison demonstrating the thickness and solidity of the fixture's glass shades compared to thinner alternatives.

## 5. OPERATING INSTRUCTIONS

---

Once installed, restore power at the circuit breaker. The fixture is now ready for use.

- **Power On/Off:** Use your wall switch to turn the light fixture on or off.
- **Dimmable Functionality:** This fixture is dimmable when used with compatible dimmable E26 bulbs and a suitable dimmer switch (bulbs and dimmer switch are not included).



Image: The SOLFART 5-Light Vanity Fixture shown in both the 'off' state (left) and the 'on' state (right), illustrating its illumination.



Image: An illustration showing various compatible E26 bulb types (Incandescent, LED, Edison, CFL) and a dimmer switch, indicating the fixture's dimmable capability.

## 6. CARE AND MAINTENANCE

To maintain the appearance and functionality of your lighting fixture:

- Always disconnect power before cleaning.
- Wipe the fixture with a soft, dry cloth.
- Do not use abrasive cleaners, solvents, or polishes as they may damage the finish.
- Clean glass shades with a mild glass cleaner and a soft cloth. Ensure they are completely dry before reattaching.

## 7. TROUBLESHOOTING

---

If you encounter issues with your lighting fixture, refer to the following common problems and solutions:

- **Light does not turn on:**
  - Check if the power is on at the circuit breaker.
  - Ensure bulbs are correctly installed and not burnt out.
  - Verify all wire connections are secure.
- **Flickering lights:**
  - Ensure bulbs are fully screwed into the sockets.
  - If using dimmable bulbs, confirm they are compatible with your dimmer switch.
  - Check for loose wire connections.
- **Glass shade appears scratched or damaged:**
  - Inspect packaging upon arrival for damage.
  - Contact customer support if components are damaged upon receipt.

## 8. WARRANTY AND SUPPORT

---

This SOLFART lighting fixture comes with a **2-year warranty** from the date of purchase.

For warranty claims, technical assistance, or any questions regarding your product, please contact SOLFART customer service. You can typically find contact information on the seller's platform or by searching for 'SOLFART customer support'.

When contacting support, please provide your order ID and the product model number (S8580-5T) for efficient service.



Comprehensive setup and performance guide for Team Power Products' Talon Edition brushless sensorless competition motors, covering stock spec and modified winds, tuning tips, and recommended car classes.



Comprehensive installation guide for Lutron RF Dimming Modules (LMJ, LMK, LMQ, LMM, LMN series) with 0-10V control, covering wiring, operation, troubleshooting, and factory reset procedures.



Detailed product data, features, benefits, dimensions, clearances, and performance specifications for the Carrier 38MURA Outdoor Unit Single Zone Heat Pump System, available in sizes 1-1/2 to 5 nominal tons.



This comprehensive manual provides essential operating, maintenance, and spare parts information for the Hercules Hoists CH III Heavy Duty Chain Electric Hoist, available in capacities of 2.5T, 5T, 7.5T, and 10T. It includes detailed instructions, safety precautions, and troubleshooting guides for industrial applications.



Comprehensive user manual for Hobbywing Justock sensorless brushless motors, detailing safety guidelines, features, technical specifications, installation, connection procedures, gear selection advice, and assembly/disassembly steps for RC cars.



User manual for the LINX-LIFT TX Series manual chain hoist, detailing safety, operation, inspection, maintenance, troubleshooting, and spare parts for models TX-0.5T through TX-30T.