

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [BLS](#) /

› [BLS T36-3 36 LED Closet Light Instruction Manual - 5500K Daylight White \(3 Pack\)](#)

BLS T36-3

BLS T36-3 36 LED Closet Light Instruction Manual

Model: T36-3 (5500K Daylight White, 3 Pack)

INTRODUCTION

Thank you for choosing the BLS T36-3 36 LED Closet Light. This super bright, battery-powered under cabinet lighting solution is designed to enhance visibility and convenience in various indoor spaces.

Featuring a motion sensor and a 1500mAh rechargeable battery, these wireless lights offer efficient and flexible illumination.

- **36 Super Bright LEDs:** Provides 180 Lumens of 5500K Daylight White light, ideal for closets, cabinets, kitchens, and more.
- **Ultra-Long Battery Run Time:** Equipped with a 1500mAh rechargeable battery, offering up to 120 days of use (based on 10 uses/day, 20 seconds/use).
- **Reliable Motion Sensor with 2 Modes:** Features ON/OFF/AUTO NIGHT/AUTO DAY & NIGHT modes. BLS Constant-Sense technology ensures the light stays on as long as motion is detected, turning off 15 seconds after inactivity.
- **Cordless Installation:** Built-in strong magnets allow for easy attachment to metal surfaces or use with provided 3M adhesive magnetic plates for non-metal surfaces.
- **Wide Application:** Suitable for various indoor locations including wardrobes, attics, basements, drawers, garages, and vanity mirrors.

SETUP INSTRUCTIONS

1. **Charge the Lights:** Before first use, fully charge each LED light using the provided USB charging cable. The charging port is located on the side of the light. A red indicator light typically signifies charging, turning green or off when fully charged.
2. **Prepare Mounting Surface:** Ensure the desired installation surface is clean, dry, and smooth.
3. **Attach Magnetic Plates (for non-metal surfaces):**
 - Peel off the protective film from one side of the 3M adhesive on the magnetic plate.
 - Firmly press the adhesive side of the magnetic plate onto the desired installation location.
 - Repeat for all lights.

4. Mount the Lights:

- If installing on a metal surface, simply attach the light directly as it has a built-in strong magnet.
- If using magnetic plates, align the magnets on the back of the LED light with the installed magnetic plates and gently attach. The lights are easily detachable for recharging.


EASY TO OPERATE SLIDE SWITCH

OFF: Power OFF

AUTO NIGHT: Motion only in dark

AUTO DAY: Motion both day & night

ON: Always On

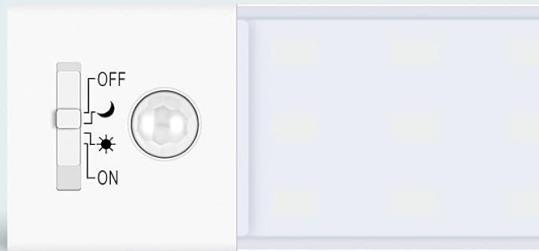

TWO MOTION SENSOR MODES

DEAL WITH DIFFERENT SCENARIOS IN YOUR

DAILY LIFE

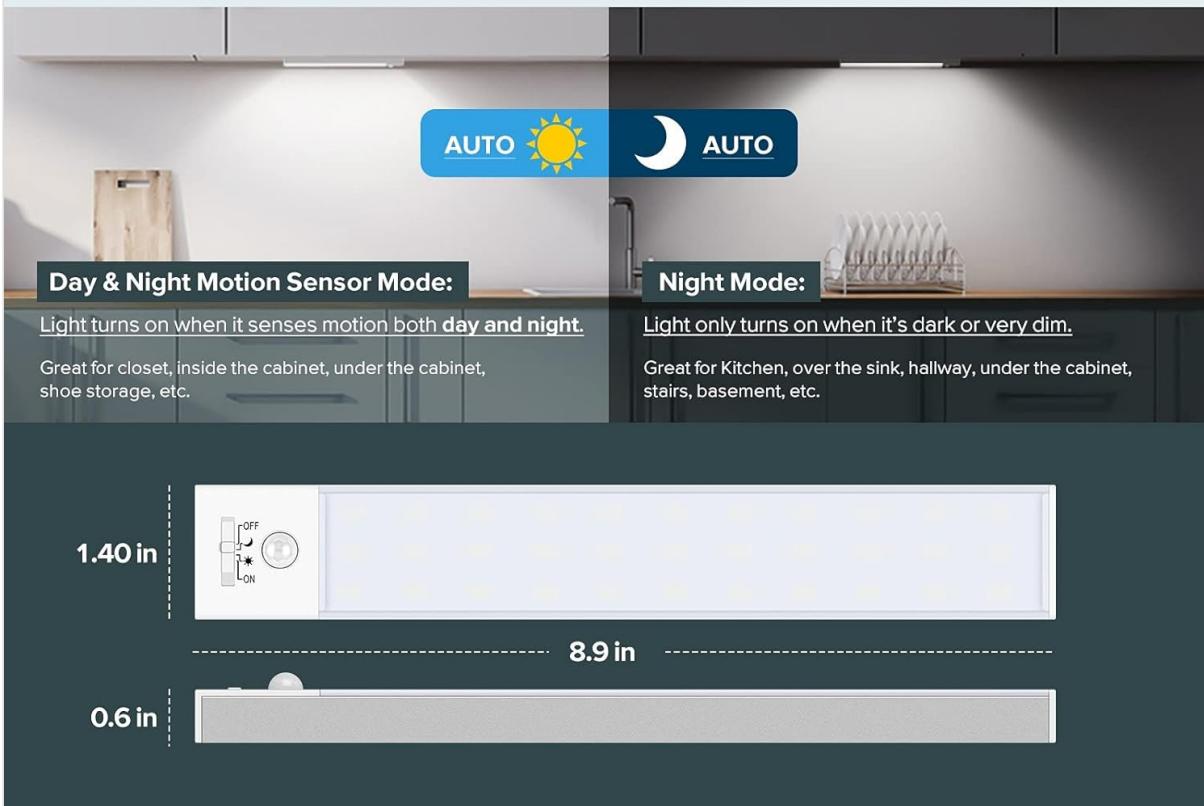


Image: Illustration of the magnetic installation process for the BLS LED Closet Light, showing how to attach the light to a surface using adhesive magnetic plates.



Image: Detailed diagram illustrating two installation methods: direct magnetic attachment to iron surfaces and using 3M adhesive magnetic plates for non-iron surfaces.

OPERATING INSTRUCTIONS

The BLS T36-3 LED Closet Light features a slide switch with multiple operating modes:

- **OFF:** Power off the light.
- **AUTO NIGHT (Moon Icon):** Motion sensor mode. The light will only turn on when it detects motion in dark or very dim conditions. Ideal for bedrooms, hallways, or basements at night.
- **AUTO DAY & NIGHT (Sun Icon):** Motion sensor mode. The light will turn on when it detects motion, regardless of ambient light conditions (day or night). Suitable for closets, cabinets, or under-cabinet lighting where light is needed at all times.
- **ON:** The light remains continuously on, regardless of motion or ambient light.

The BLS Constant-Sense technology ensures the light stays illuminated as long as motion is detected nearby, automatically turning off approximately 15 seconds after motion ceases.

EASY TO INSTALL WITH STRONG MAGNET

Install with 3M adhesives or attach the light to any iron surface

1 e.g Attach To Refrigerator

Detacting Distance:
10ft, 120°



10ft



120°



15s

2 e.g Under Cabinet

1 Free attach to ironwork surface

This LED light can be attached directly on any Ironwork surface .



2 Use magnet plates with 3M adhesives for non-iron surface.

Step 1 : Stick the magnet plate on the surface
Step 2 : Attach the light to the magnet plate



Image: Close-up of the BLS LED Closet Light's slide switch, detailing the four operating modes: OFF, AUTO NIGHT (moon icon), AUTO DAY & NIGHT (sun icon), and ON.

MAINTENANCE

- Charging:** When the light dims or stops responding, it indicates a low battery. Detach the light from its mounting, connect the provided USB cable to the charging port, and plug it into a USB power source. A red indicator light typically signifies charging, turning green or off when fully charged.
- Cleaning:** Wipe the light's surface with a soft, dry cloth. Avoid using abrasive cleaners or solvents that may damage the finish or electronic components.
- Storage:** If storing the lights for an extended period, ensure they are fully charged and stored in a cool, dry place. Recharge periodically to maintain battery health.

Charging Demonstration Video

Your browser does not support the video tag.

Video: A demonstration on how to charge the BLS LED Closet Light using the provided USB cable. This video shows the charging port and indicator light behavior.

Battery Life Information Video

Your browser does not support the video tag.

Video: This video highlights the 1500mAh rechargeable battery and its extended run time of up to 120 days, demonstrating the product's efficiency.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	Low battery. Incorrect mode setting. Insufficient darkness (in AUTO NIGHT mode).	Charge the light fully. Check the slide switch and ensure it's set to ON, AUTO NIGHT, or AUTO DAY & NIGHT. Test in a darker environment or switch to AUTO DAY & NIGHT mode.
Motion sensor not working.	Incorrect mode setting. Sensor obstructed. Ambient light too bright (in AUTO NIGHT mode).	Ensure the switch is set to AUTO NIGHT or AUTO DAY & NIGHT. Clear any obstructions from the sensor. Test in a darker area or switch to AUTO DAY & NIGHT.
Light falls off mounting surface.	Adhesive not strong enough or surface not clean. Magnetic plates not properly secured.	Clean the surface thoroughly before applying adhesive. Use new 3M adhesive strips if necessary. Consider using screws for more permanent installation if the surface allows.
Short battery life.	Frequent activation. Continuous ON mode usage. Battery degradation over time.	Optimize mode setting (e.g., use AUTO NIGHT in dark areas). Avoid prolonged use in ON mode. Ensure full charge cycles. If battery life remains significantly short, contact support.

SPECIFICATIONS

Feature	Detail
Brand	BLS
Model Name	36 LED Closet Lights (T36-3)
Color Temperature	5500K Daylight White
Number of LEDs	36
Brightness	180 Lumens

Feature	Detail
Power Source	1500mAh Rechargeable Lithium Ion Battery (included)
Wattage	3 watts
Material	Acrylonitrile Butadiene Styrene, Aluminum
Product Dimensions	8.9" L x 1.4" W x 0.6" H
Item Weight	0.42 Kilograms (14.8 ounces)
Installation Type	Wall Mount / Under Cabinet (Magnetic with 3M adhesive)
Special Feature	3-way switching, Motion Sensor, Instant On
Control Method	Slide Switch
Indoor/Outdoor Usage	Indoor
Water Resistance Level	Waterproof (Note: Typically means splash-proof, not submersible)

WARRANTY INFORMATION

BLS offers an 18-month warranty for this product. To register for your free extended warranty, please scan the QR code provided on the product packaging or contact customer support.

CUSTOMER SUPPORT

For any support needs, questions, or concerns regarding your BLS T36-3 LED Closet Light, please contact us via email:

cuscare.blscollection@gmail.com