

JYX JYX-69BT

JYX Karaoke System JYX-69BT User Manual

Model: JYX-69BT | Brand: JYX

1. PRODUCT OVERVIEW

The JYX Karaoke System JYX-69BT is a portable and versatile audio system designed for entertainment. It features high-quality sound output, wireless microphones, and multiple connectivity options, making it suitable for various occasions. This manual provides detailed instructions for setting up, operating, and maintaining your karaoke system.



Image 1.1: The JYX Karaoke System JYX-69BT, showcasing the main unit, two wireless microphones, remote control, and charging cables.

Key Features:

- **Portable Design:** Equipped with a durable shoulder strap for easy transport.
- **High-Quality Audio:** Features a superior subwoofer and Bluetooth 5.0 for clear sound.
- **Dual Wireless Microphones:** Includes two wireless microphones for duets and interactive performances.
- **Long Battery Life:** Rechargeable battery provides up to 8 hours of operation.
- **TWS Stereo Surround:** Connect two JYX-69BT units for an immersive stereo experience.
- **Multi-functional Connectivity:** Supports Bluetooth, AUX, USB, TF Card, and FM radio.
- **Dynamic DJ Lights:** Integrated disco lights synchronize with music for an enhanced atmosphere.
- **Infrared Remote Control:** Allows convenient control of functions from a distance.

2. SETUP

2.1 Unboxing and Contents

Carefully remove all components from the packaging. Ensure the following items are present:

- JYX Karaoke System JYX-69BT Main Unit
- 2 Wireless Microphones
- Remote Control
- USB Charging Cable
- AUX Cable
- Shoulder Strap
- User Manual (this document)

2.2 Charging the Unit

Before first use, fully charge the karaoke system. Connect the provided USB charging cable to the **5V-1A POWER** port on the unit and to a compatible USB power adapter (not included). The charging indicator light will show the charging status. A full charge provides up to 8 hours of playtime.

2.3 Microphone Setup

The wireless microphones are pre-paired with the main unit. Ensure the microphones have batteries installed (if required, check microphone compartment) and are powered on. They will automatically connect to the karaoke system when both are active.



Image 2.1: A user operating the wireless microphone with the JYX Karaoke System.

3. OPERATING INSTRUCTIONS

3.1 Power On/Off

To power on the unit, locate the **POWER** switch, usually on the control panel, and slide it to the 'ON' position. To power off, slide it to 'OFF'.



Image 3.1: Detailed view of the JYX-69BT control panel, showing input ports, volume knobs, and function buttons.

3.2 Mode Selection

Press the **MODE** button on the control panel or remote control to cycle through available input modes: Bluetooth, AUX, USB, TF Card, and FM Radio. The current mode will be displayed on the LED screen.

3.3 Bluetooth Connection

1. Power on the JYX-69BT unit.
2. Select **Bluetooth** mode using the **MODE** button. The LED display will show "BLUE" and a blinking Bluetooth icon, indicating it's ready for pairing.
3. On your mobile device (smartphone, tablet, etc.), enable Bluetooth and search for available devices.
4. Select "JYX-69BT" from the list of devices.
5. Once connected, the unit will emit a confirmation sound, and the Bluetooth icon will stop blinking. You can now play audio from your device through the karaoke system.



Image 3.2: Demonstrating Bluetooth connectivity and dynamic lighting effects.

3.4 TWS (True Wireless Stereo) Connection

To achieve a stereo sound experience, you can connect two JYX-69BT units wirelessly:

1. Ensure both JYX-69BT units are powered on and in **Bluetooth** mode, but not yet connected to any mobile device.
2. On one of the units (this will be the primary unit), press and hold the **TWS** button. The unit will emit a pairing sound.
3. The primary unit will automatically search for and connect to the second unit. Once connected, both units will play audio in stereo.
4. Now, connect your mobile device to the primary JYX-69BT unit via Bluetooth as described in Section 3.3.

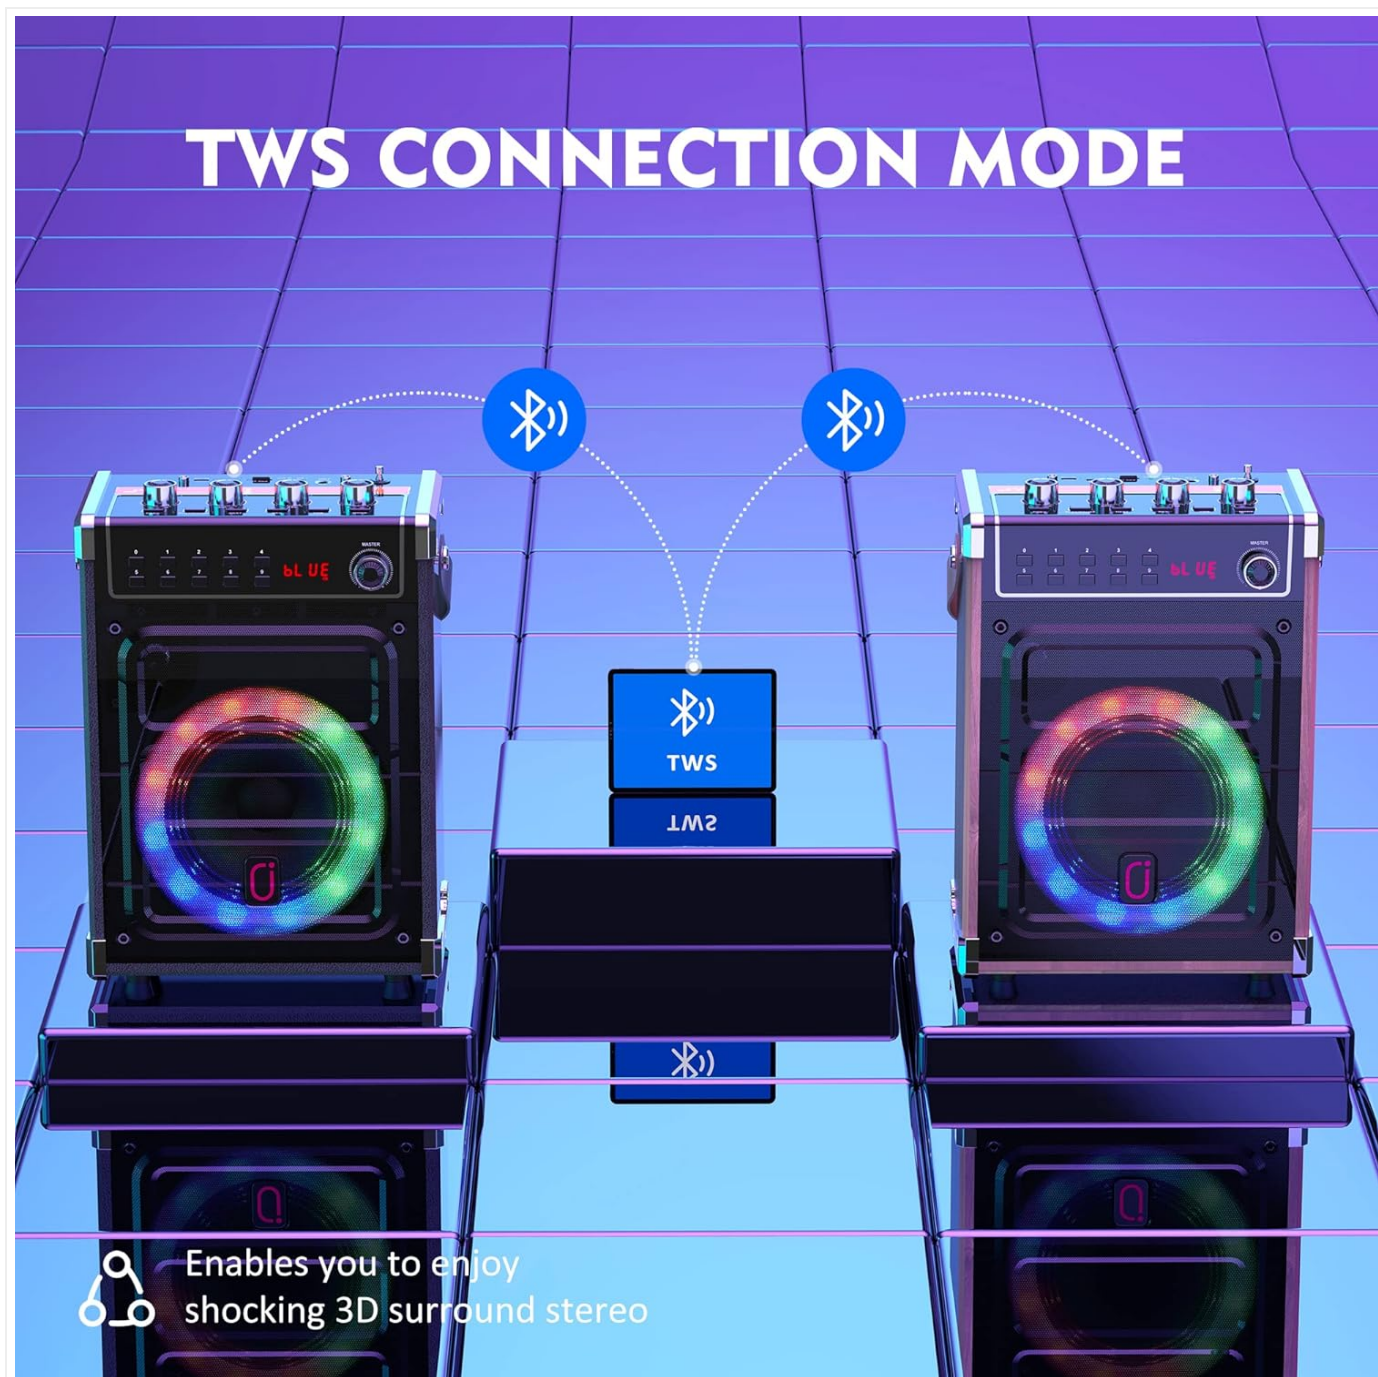


Image 3.3: Visual representation of the TWS connection mode for enhanced stereo audio.

3.5 Playing Music from USB/TF Card

Insert a USB flash drive or TF (Micro SD) card containing MP3 audio files into the respective **USB** or **TF Card** slot. The system will automatically switch to the corresponding mode and begin playing music. Use the **PREV/NEXT** buttons to skip tracks and **PLAY/PAUSE** to control playback.

3.6 AUX Input

Connect an external audio device (e.g., MP3 player, computer) to the **AUX IN** port using the provided AUX cable. Select **AUX** mode using the **MODE** button. Audio from the connected device will play through the karaoke system.

3.7 FM Radio

In **FM Radio** mode, press the **PLAY/PAUSE** button to auto-scan and save available radio stations. Use the **PREV/NEXT** buttons to navigate between saved stations.

3.8 Microphone and Karaoke Functions

Adjust microphone volume using the **MIC VOL** knob. The **ECHO** knob controls the echo effect for vocals. Use the **BASS** and **TREBLE** knobs to fine-tune the overall sound output. Ensure microphones are powered on and connected. To record your performance, press the **REC** button. A USB drive or TF card must be inserted to save recordings.

3.9 DJ Lighting Effects

The integrated DJ lights automatically synchronize with the music rhythm. There are various lighting effects that can be cycled through or turned off using a dedicated button (if available) or the remote control.

3.10 Remote Control Usage

The infrared remote control allows you to manage playback, volume, mode selection, and other functions from a distance. Point the remote control directly at the unit's infrared receiver for optimal performance.

4. MAINTENANCE

4.1 Cleaning

Wipe the unit with a soft, dry cloth. Do not use abrasive cleaners, waxes, or solvents as they may damage the finish. Keep the speaker grille free from dust and debris.

4.2 Storage

When not in use for extended periods, store the karaoke system in a cool, dry place away from direct sunlight and extreme temperatures. Ensure the unit is fully charged before storing to prolong battery life.

4.3 Battery Care

To maintain the rechargeable battery's health, avoid completely draining it frequently. Recharge the unit regularly, even if not in constant use. Do not expose the battery to high temperatures.

5. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Battery is depleted.	Charge the unit using the provided USB cable.
No sound from speaker	Volume is too low; incorrect mode selected; audio source issue.	Increase MASTER volume. Ensure correct input mode (Bluetooth, AUX, USB, TF). Check audio source device volume and connection.
Microphone not working	Microphone is off; batteries are low; MIC VOL is low.	Ensure microphone is powered on. Replace microphone batteries. Increase MIC VOL knob.
Bluetooth connection fails	Unit not in pairing mode; device too far; interference.	Ensure unit is in Bluetooth pairing mode ("BLUE" blinking). Move device closer. Disconnect other Bluetooth devices.

Problem	Possible Cause	Solution
TWS connection fails	Units not in correct mode; TWS pairing not initiated correctly.	Ensure both units are in Bluetooth mode and not connected to a phone. Press and hold TWS button on one unit to initiate pairing.
Remote control not working	Remote batteries low; line of sight blocked.	Replace remote control batteries. Ensure clear line of sight to the unit's IR receiver.

6. SPECIFICATIONS

Feature	Detail
Model Number	JYX-69BT
Brand	JYX
Dimensions (L x W x H)	17 x 28 x 40 cm (approximately 6.7 x 11 x 15.7 inches)
Weight	2.96 Kilograms (approximately 6.5 lbs)
Connectivity Technology	Bluetooth 5.0
Audio Input Options	Bluetooth, AUX, USB, TF Card
Number of Channels	2
Power Source	Battery Powered
Battery Type	1 Lithium-ion battery (rechargeable)
Recommended Use	Sound System
Material	Metal (frame/accents)
Compatible Devices	Laptop, Smartphone, Tablet
UPC	797442539389



Image 6.1: Internal components of the JYX-69BT speaker, highlighting the tweeter and subwoofer.

7. WARRANTY AND SUPPORT

7.1 Manufacturer's Warranty

The JYX Karaoke System JYX-69BT comes with a **12-month manufacturer's warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or normal wear and tear.


Please retain your proof of purchase for warranty claims.

7.2 Customer Support

For technical assistance, troubleshooting beyond this manual, or warranty inquiries, please contact JYX customer support. Refer to the contact information provided with your product packaging or visit the official JYX website for support details. When contacting support, please have your product model number (JYX-69BT) and proof of purchase readily available.

Related Documents - JYX-69BT

	JYX-T8/T9 User Manual: Operation Guide for Karaoke Machine Comprehensive user manual for the JYX-T8/T9 karaoke machine, covering speaker and remote control operations, modes, recording, and troubleshooting.
	JYX-69BT Portable Karaoke Machine User Manual User manual for the JYX-69BT portable karaoke machine, detailing operation guides for the speaker and remote control in multiple languages.
	JYX Karaoke Machine FAQ - S55 and 69BT Models Frequently Asked Questions about the JYX Karaoke Machine, covering differences between S55 and 69BT models, TWS mode, connectivity, microphone compatibility, charging, remote control range, and microphone capacity.
	JYX JYX-S55 Portable Karaoke Machine User Manual This user manual provides comprehensive instructions for operating the JYX JYX-S55 Portable Karaoke Machine, covering speaker and remote control functions, various modes (Bluetooth, USB, TF, FM, Karaoke, Recording, TWS), and troubleshooting tips.
	JYX T17-T Karaoke Machine User Manual - Portable Speaker with Wireless Microphones Comprehensive user manual for the JYX T17-T portable karaoke machine. Learn about its features, setup, operation, and troubleshooting for wireless microphones, LED lights, Bluetooth, USB, TF, and AUX connectivity.
	JYX-69BT Portable Karaoke Machine User Manual User manual for the JYX-69BT portable karaoke machine, detailing operation guides for the speaker and remote control across multiple languages including English, German, Japanese, French, Korean, Spanish, Italian, Portuguese, and Arabic.

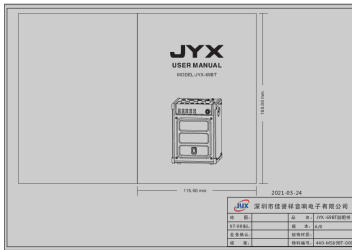

[JYX-69BT Portable Bluetooth Speaker User Manual & Operation Guide](#)

Detailed user manual for the JYX-69BT portable Bluetooth speaker. Learn how to connect via Bluetooth, use FM radio, TWS, and the remote control. Includes specifications, packing list, and troubleshooting FAQs.

lang:en score:58 filesize: 503.9 K page_count: 6 document date: 2022-07-12



[\[pdf\] Test Report](#)

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT fly 14 JYX 69BT TestRpt DTS BLE r1

Shenzhen dolphin technology Co Ltd 2A75KJYX 2A75KJYX69BT jyx 69bt

Report No.: S22071806301002 RADIO TEST REPORT FCC ID: 2A75KJYX-69BT

Product: Portable Speaker Trade Mark: N/A Model No.: **JYX-69BT** Family Model: N/A

Report No.: S22071806301002 Issue Date: Jul. 28, 2022 Prepared for Shenzhen dolphin technology Co., Ltd 5th Floor, Building 5, Houhai Industrial Park, ...

lang:tl score:57 filesize: 2.12 M page_count: 49 document date: 2022-08-19



[\[pdf\] Test Report](#)

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT fly 14 JYX 69BT TestRpt DSS r1 Shenzhen


dolphin technology Co Ltd Portable Speaker 2A75KJYX 2A75KJYX69BT jyx 69bt

Report No.: S22071806301001 RADIO TEST REPORT FCC ID: 2A75KJYX-69BT

Product: Portable Speaker Trade Mark: N/A Model No.: **JYX-69BT** Family Model: N/A

Report No.: S22071806301001 Issue Date: Jul. 28, 2022 Prepared for Shenzhen dolphin technology Co., Ltd 5th Floor, Building 5, Houhai Industrial Park, ...

lang:tl score:56 filesize: 4.57 M page_count: 70 document date: 2022-08-19

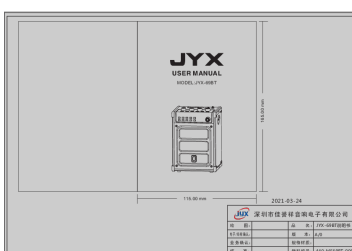

[\[pdf\] User Manual Instructions Specifications Warranty Accessories](#)

JYX 69BT cdr Administrator User Manual Karaoke Machine with Two Wireless Microphones Bass

Treble Adjustment and LED Light Support TWS AUX in FM Radio REC Supply for Party Meeting

Wedding Black Musical Instruments 81y8Rr0WEcL m media amazon images I |||

USER MANUAL MODEL: **JYX-69BT** 165.00 mm 115.00 mm 2021-03-24 / **JYX-69BT**

A/0 440-MS69BT-000 Attentions.....1

Directions For Use.....2 Operation Guides.....

lang:en score:56 filesize: 500.23 K page_count: 6 document date: 2021-03-25




[pdf] Specifications Declaration of Conformity

Antenna Specification Daniela Eckert 17 JYX 69BT AntSpec Shenzhen dolphin technology Co Ltd 2A75KJYX 2A75KJYX69BT jyx 69bt

Shenzhen dolphin technology Co., Ltd Declaration concerning Antenna Specification It is hereby declared that the product Model No.: **JYX-69BT** FCC ID: 2A75K**JYX-69BT** fulfills the requirement in FCC test relating to the antenna type. The device specified above confirms to the FCC recommendations for...


lang:tl score:53 filesize: 13.54 K page_count: 1 document date: 2022-08-18

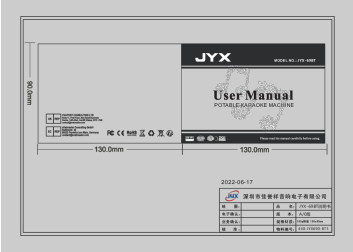

JYX-69BT Portable Karaoke Machine User Manual

User manual for the JYX-69BT portable karaoke machine, detailing operation guides for the speaker and remote control in multiple languages.

lang:es score:46 filesize: 4.54 M page_count: 17 document date: 2022-08-18

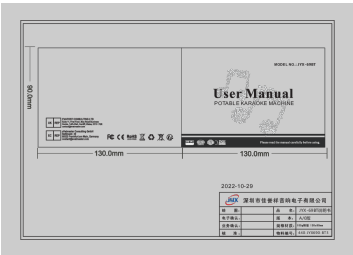

[pdf] Instructions

JYX 69bt Administrator Manuel de l'utilisateur Machine Karaoké Enceintes Professionnelles avec 2 Microphones sans Fil et Lumières Fête DJ Supporte le Système Portable TWS AUX FM USB TF Card Amazon fr Jeux Jouets C1TlhNQla7L m media amazon images I ||| MODEL NO.: **JYX-69BT** POTABLE KARAOKE MACHINE 2022-10-29 **JYX-69BT** A/0 440-JYX690-BT3 Thanks for your purchasing.Please read the directions carefully before using and follow the correct instructions. Danke fr Ihren Einkauf. Bitte lesen Sie die Gebrauchsanweisungen sorgflltig durch und befolgen Sie d...

lang:es score:38 filesize: 4.32 M page_count: 17 document date: 2022-10-29

Model difference declaration letter	
Differences Declaration	
FCC ID: ZBC75-JYX-00BT	
Ve Shenzhen JiaYuanAcoustics Electronic Co.,Ltd date:	
Product:	Speaker JYX-00BT1,JYX-00BT2,JYX-00BT3,JYX-00BT4 JYX-00BT5,JYX-01,JYX-02,JYX-03,JYX-04,JYX-05,JYX-06,JYX-07,JYX-08,JYX-09,JYX-10,JYX-11,JYX-12,JYX-13,JYX-14,JYX-15,JYX-16,JYX-17,JYX-18,JYX-19,JYX-20,JYX-21,JYX-22,JYX-23,JYX-24,JYX-25,JYX-26,JYX-27,JYX-28,JYX-29,JYX-30,JYX-31,JYX-32,JYX-33,JYX-34,JYX-35,JYX-36,JYX-37,JYX-38,JYX-39,JYX-40,JYX-41,JYX-42,JYX-43,JYX-44,JYX-45,JYX-46,JYX-47,JYX-48,JYX-49,JYX-50,JYX-51,JYX-52,JYX-53,JYX-54,JYX-55,JYX-56,JYX-57,JYX-58,JYX-59,JYX-60,JYX-61,JYX-62,JYX-63,JYX-64,JYX-65,JYX-66,JYX-67,JYX-68,JYX-69,JYX-70,JYX-71,JYX-72,JYX-73,JYX-74,JYX-75,JYX-76,JYX-77,JYX-78,JYX-79,JYX-80,JYX-81,JYX-82,JYX-83,JYX-84,JYX-85,JYX-86,JYX-87,JYX-88,JYX-89,JYX-90,JYX-91,JYX-92,JYX-93,JYX-94,JYX-95,JYX-96,JYX-97,JYX-98,JYX-99,JYX-100
Model Name:	JYX-00BT1,JYX-00BT2,JYX-00BT3,JYX-00BT4 JYX-00BT5,JYX-01,JYX-02,JYX-03,JYX-04,JYX-05,JYX-06,JYX-07,JYX-08,JYX-09,JYX-10,JYX-11,JYX-12,JYX-13,JYX-14,JYX-15,JYX-16,JYX-17,JYX-18,JYX-19,JYX-20,JYX-21,JYX-22,JYX-23,JYX-24,JYX-25,JYX-26,JYX-27,JYX-28,JYX-29,JYX-30,JYX-31,JYX-32,JYX-33,JYX-34,JYX-35,JYX-36,JYX-37,JYX-38,JYX-39,JYX-40,JYX-41,JYX-42,JYX-43,JYX-44,JYX-45,JYX-46,JYX-47,JYX-48,JYX-49,JYX-50,JYX-51,JYX-52,JYX-53,JYX-54,JYX-55,JYX-56,JYX-57,JYX-58,JYX-59,JYX-60,JYX-61,JYX-62,JYX-63,JYX-64,JYX-65,JYX-66,JYX-67,JYX-68,JYX-69,JYX-70,JYX-71,JYX-72,JYX-73,JYX-74,JYX-75,JYX-76,JYX-77,JYX-78,JYX-79,JYX-80,JYX-81,JYX-82,JYX-83,JYX-84,JYX-85,JYX-86,JYX-87,JYX-88,JYX-89,JYX-90,JYX-91,JYX-92,JYX-93,JYX-94,JYX-95,JYX-96,JYX-97,JYX-98,JYX-99,JYX-100
Ve (Shenzhen) JiaYuanAcoustics Electronic Co., Ltd hereby state that all the models are electrical circuit including the same software parameter and hardware design as the original design, PCB Layout, RF module/circuit, internal type(s) and external location at components on PCB, etc.), same mechanical structure and design (including product enclosure, materials, etc.), the only difference is the model name and appearance color.	
Synatry	
Date: 10-13-2013	
Name: David Yu	Date: Oct. 23, 2013
Title: Manager	
Signature of applicant:	David Yu

[illegible]

CS26491_18_Ed.1

Letter of Authorization

Shenzhen JiaYuanJing Acoustics Electronic Co.,Ltd
Company: Shenzhen JiaYuanJing Acoustics Electronic Co.,Ltd
Address: 7/Floor 2-5, Building 7, Houhai Inkeba Park, Linde Industrial Zone, Lianxin Community, Xinhai Street, Guangming District, Shenzhen City

Product Name: Speaker
Model Number: JTK-60B1, JTK-60B1, JTK-65S, JTK-60B1, JTK-65B1, JTK-01, JTK-02, U3D, U3D, U50, JTK-015, JTK-615, JTK-61B2, JTK-NB18, JTK-NB18, JTK-NB87, JTK-K19, JTK-X9, JTK-X51, JTK-D12, H-D13, JTK-S15, JTK-AW20, JTK-T002, H-86, H-681-1, H-6, D16, D16-1, JTK-C25, D16, K-W, K-J, K-BK, K-GR, H11, D17, JTK-D20, D20-1, D21, D21-1, D22, D22-1, D25, D25-1, D26, D26-1, D27, D27-1, D28, D28-1, H12-1, JTK-XN00, S-D18, S19, S20, S21, S22, S23, S25, S26, S27, S28, S29, S30, S31, S32, S33, S34

FCC Identifier: 2BC75-FCC-00B1

We authorize LGAL Technological Center S.A., Ronda de la Font del Carme, s/n, 08100 Badalona , Spain, to act on our behalf on all matters concerning the above named equipment.

Any individual within LGAL Technological Center S.A. is authorized to act on our behalf and take action on the application.

We declare that authorizes LGAL Technological Center S.A., Ronda de la Font del Carme, s/n, 08100 Badalona, Spain, to act on our behalf to provide us with all information related to the approval of product to the Federal Communication Commission and to discuss any issues concerning the approval application. Any and all acts carried out by LGAL Technological Center S.A. on our behalf shall have the same effect as acts of our own.

Name: David Wu **Date:** 2023.10.24

Title: manager

Signature of applicant:
David Wu

1/1

[\[pdf\]](#) Decleration of Conformity

Differences Description simple Family declaration Shenzhen JiaYuXiang Acoustics Electronic Co Ltd JYX

60BT Speaker 2BC75 2BC75JYX60BT jyx 60bt

Model difference declaration letter Differences Description FCC ID2BC75-JYX-60BT

We Shenzhen JiaYuXiang Acoustics Electronic Co.,Ltd state: Product Model Name

Speaker JYX-60BT,JYX-66BT,JYX-S55,**JYX-69BT**, JYX-65BT,JYX-01,JYX-02,U30,U50,U60,JYX-V15, JYX-61BT,JYX-N882,JYX-N883,JYX-N886, JYX-N887,JYX-...

lang:en score:38 filesize: 120.28 K page_count: 1 document date: 2023-10-30

FCC Local Representative Letter for Shenzhen JiaYuXiang Acoustics JYX-65BT
Microphone

Official FCC Local Representative Letter designating GLOCERTS TECHNOLOGY INC as the U.S. agent for Shenzhen JiaYuXiang Acoustics Electronic Co., Ltd's JYX-65BT microphone and related models, detailing responsibilities and contact information for FCC certification compliance.

lang:en score:38 filesize: 145.98 K page_count: 2 document date: 2025-06-17

[\[pdf\]](#)

Microsoft Word C5266091 X8 Letter of Authorization Agent v1 Shenzhen JiaYuXiang Acoustics Electronic
Co Ltd JYX 60BT Speaker 2BC75 2BC75JYX60BT jyx 60bt

C5266091_X8_Ed.1 Letter of Authorization Shenzhen JiaYuXiang Acoustics


Electronic Co.,Ltd Company: S ... Guangming District, Shenzhen City Product Name:

Speaker Model Number: JYX-60BT, JYX-66BT, JYX-S55, **JYX-69BT**, JYX-65BT,

JYX-01, JYX-02, U30, U50, U60, JYX-V15, JYX-61BT, JYX-N882, JYXN883, JYX-

N886, J...

lang:en score:38 filesize: 148.13 K page_count: 1 document date: 2023-10-24

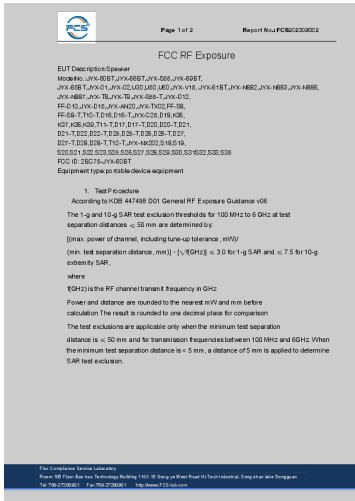


[pdf] SAR Rating

Windows RF Exposure Shenzhen JiaYuXiang Acoustics Electronic Co Ltd JYX 60BT Speaker 2BC75 2BC75JYX60BT jyx 60bt

Page 1 of 2 Report No.: FCS202309302 FCC RF Exposure EUT Description: Speaker Model No.: JYX-60BT, JYX-66BT, JYX-S55, **JYX-69BT**, JYX-65BT, JYX-01, JYX-02, U30, U50, U60, JYX-V15, JYX-61BT, JYX-N882, JYX-N883, JYX-N886, JYX-N887, JYX-T8, JYX-T9, JYX-S55-T, JYX-D12, FF-D13, JYX-D15, JYX-AN20, JYX-TX02, FF-S8, FF-S8-T, T10-T...

lang:en score:37 filesize: 117.42 K page_count: 2 document date: 2023-10-30

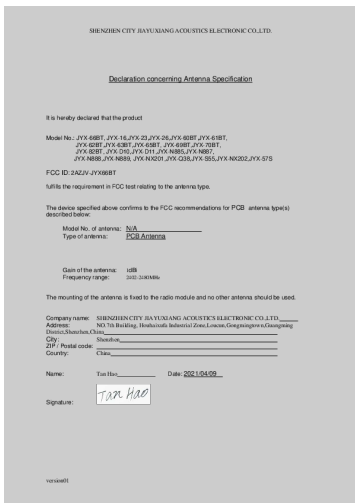


[pdf] Specifications Declaration of Conformity

Microsoft Word 17 model AntSpec v01 ntek205 JYX 66BT SHENZHEN CITY JIAYUXIANG ACOUSTICS ELECTRONIC CO LTD JYX66BT 2AZJV 2AZJVJYX66BT jyx66bt

SHENZHEN CITY JIAYUXIANG ACOUSTICS ELECTRONIC CO.,LTD. Declaration concerning Antenna Specification It is hereby declared that the product Model No.: JYX-66BT, JYX-16, JYX-23, JYX-26, JYX-60BT, JYX-61BT, JYX-62BT, JYX-63BT, JYX-65BT, **JYX-69BT**, JYX-70BT, JYX-82BT, JYX-D10, JYX-D11, JYX-N885, JYX-N887, JYX-N...


lang:en score:36 filesize: 13.44 K page_count: 1 document date: 2021-04-09

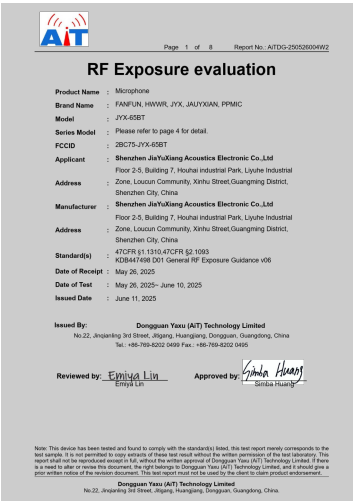

[RF Exposure Evaluation Report for JYX-65BT Microphone](#)

This report details the RF exposure evaluation for the JYX-65BT microphone, conducted by Dongguan Yaxu (AiT) Technology Limited, adhering to FCC standards and KDB guidelines.


lang:en **score:34** filesize: 248.72 K page_count: 8 document date: 2025-06-23

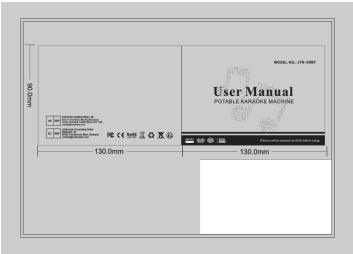

[JYX-69BT Portable Karaoke Machine User Manual](#)

User manual for the JYX-69BT portable karaoke machine, detailing operation guides for the speaker and remote control across multiple languages including English, German, Japanese, French, Korean, Spanish, Italian, Portuguese, and Arabic.


lang:en **score:32** filesize: 13.17 M page_count: 17 document date: 2024-07-30

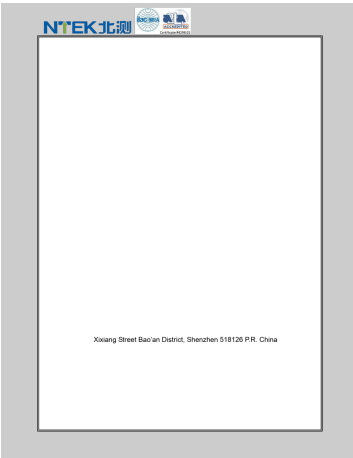


[\[pdf\] Test Report](#)

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT fly 14 JYX 66BT TestRpt DSS r1
SHENZHEN CITY JIAYUXIANG ACOUSTICS ELECTRONIC CO LTD JYX66BT 2AZJV 2AZJVJYX66BT
jyx66bt
Report No.: S21031200201001 RADIO TEST REPORT FCC ID: 2AZJV-JYX66BT
Product: ACOUSTICS Trade Mark: JYX Model No.: JYX-66BT JYX-16,JYX-23,JYX-26,JYX-60BT,JYX-61BT, JYX-62BT,JYX-63BT,JYX-65BT, **JYX-69BT**, Family Model: JYX-70BT ,JYX-82BT, JYX-D10,JYX-D11, JYX-N885,JYX-N887,JYX-N888,JYX-N889, JYX-NX201,J...

lang:tl **score:31** filesize: 4.62 M page_count: 70 document date: 2021-04-13



lang:en score:26 filesize: 297.09 K page_count: 2 document date: 2022-08-18

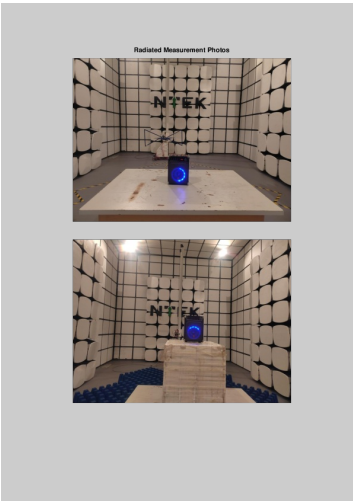

[pdf]

ntek202 10 JYX 69BT TSup DTS Shenzhen dolphin technology Co Ltd 2A75KJYX 2A75KJYX69BT jyx 69bt

Radiated Measurement Photos Conducted Measurement Photos ...

lang:en score:26 filesize: 297.09 K page_count: 2 document date: 2022-08-18

FCC ID: 2A75KJYX69BT

Portable Device

According to §15.247(e)(1) and §15.247(e)(2), a device operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to §15.247(e)(1) and §15.247(e)(2), a device operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a SAR test report for the device. The test was conducted in an anechoic chamber. The test results are as follows:

Device	Model	Frequency (MHz)	Power (mW)	Distance (m)	Result (dBm)	Pass/Fail
SAR	2A75KJYX69BT	900	100	0.3	-1.2	Pass
		1800	100	0.3	-1.2	Pass
		2400	100	0.3	-1.2	Pass
		2450	100	0.3	-1.2	Pass
RF	2A75KJYX69BT	900	100	0.3	-1.2	Pass
		1800	100	0.3	-1.2	Pass
		2400	100	0.3	-1.2	Pass
		2450	100	0.3	-1.2	Pass

Conclusion: The device complies with the FCC SAR requirements.

For the test result: 0.0261432 for 1g SAR, SAR is not required.

Signature: _____ Date: 2022-08-01

NAME AND TITLE: (Please print or type) Alex's Manager
COMPANY: (Please print or type) Shenzhen Dolphin Technology Co., Ltd. 1/F, Building 10, Foshan Science Park, Shimen Community/Jiang Street/Bai'an District, Shenzhen P.R. China.

[pdf] SAR Rating

According to §15 Benjamin 18 JYX 69BT RFExp Shenzhen dolphin technology Co Ltd Portable Speaker 2A75KJYX 2A75KJYX69BT jyx 69bt

FCC ID: 2A75KJYX-69BT Portable device According to 15.247 e i and 1.1307 b 1 , systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission s guidelines. According ...

lang:en score:25 filesize: 115.5 K page_count: 1 document date: 2022-08-04



[pdf]

ATTACHMENT PHOTOGRAPHS OF EUT 09 JYX 69BT IntPho Shenzhen dolphin technology Co Ltd 2A75KJYX 2A75KJYX69BT jyx 69bt

Photo 9 Photo 10 Photo 11 Photo 12 Photo 13 Photo 14 Photo 15 Photo 16 Photo 17 Ant Photo 18 Photo 19 Photo 20 Photo 21 Photo 22 Photo 23 Photo 24 Photo 25 Photo 26 Photo 27 ...

lang:en score:25 filesize: 2.04 M page_count: 10 document date: 2022-08-18



[pdf]

ATTACHMENT PHOTOGRAPHS OF EUT 08 JYX 69BT ExtPho Shenzhen dolphin technology Co Ltd
Portable Speaker 2A75KJYX 2A75KJYX69BT jyx 69bt

ATTACHMENT PHOTOGRAPHS OF EUT Photo 1 Photo 2 Photo 3 Photo 4 Photo 5
Photo 6 Photo 7 Photo 8 ...

lang:en score:24 filesize: 628.82 K page_count: 4 document date: 2022-08-04



[pdf] Label

JYX MS69BT FCC Administrator 06 69BT LabelSmpl US r1 Shenzhen dolphin technology Co Ltd

Portable Speaker 2A75KJYX 2A75KJYX69BT jyx 69bt

PVC0.2mm 39.5x24.5mm 2022-06-29 1 ...

lang:en score:19 filesize: 204.38 K page_count: 1 document date: 2022-08-18