

VQ VQ-MONTY-BK&WT

VQ Monty DAB/DAB+ & FM Radio with Bluetooth

Model: VQ-MONTY-BK&WT

1. INTRODUCTION

The VQ Monty is a versatile digital radio designed to provide high-quality audio and a range of features in a stylish, portable package. It supports DAB, DAB+, and FM radio reception, Bluetooth connectivity for wireless audio streaming, and includes an integrated alarm clock. The radio features a real wood case and premium finishes, enhancing both its acoustic performance and aesthetic appeal. This manual provides detailed instructions for setting up, operating, and maintaining your VQ Monty radio.





Image: Front view of the VQ Monty DAB Radio, showcasing its black and walnut real wood case, digital display, and control buttons.

2. WHAT'S IN THE BOX

Upon unboxing your VQ Monty radio, please ensure all the following items are present:

- VQ Monty DAB/DAB+ & FM Radio
- Power Adapter
- Owner's Manual (this document)

Note: A rechargeable battery for portable use is not included and must be purchased separately.


3. PRODUCT FEATURES

3.1 Portable Radio Functionality

The VQ Monty is designed for both mains-powered and portable use. It features comprehensive DAB digital and FM radio capabilities with 60 total radio pre-sets, allowing you to easily store and access your favorite stations. For portable

operation, a rechargeable battery (not included) can be installed.





Premium PU Leather
& Satin Nickel Detail

Premium materials
throughout for a
sophisticated look and feel.



Real Wood Case

Monty is made with premium
materials including a
REAL WOOD case, which
features and exposed grain
making it look and feel great.

Image: The VQ Monty radio displayed next to the "digitalradio V Approved Product" logo, indicating its quality and future-readiness for digital broadcasts.

3.2 Personal Music Streaming


Stream your preferred music, podcasts, or audiobooks wirelessly from any smartphone, tablet, or compatible device using the integrated Bluetooth speaker. For devices without Bluetooth, a 3.5mm Aux-in port is provided for a wired connection.

10 Watt Driver

The custom mounted speaker driver delivers room filling sound.

Ultra-Wide Cone

The ultra-wide shallow angled cone delivers balanced acoustics.

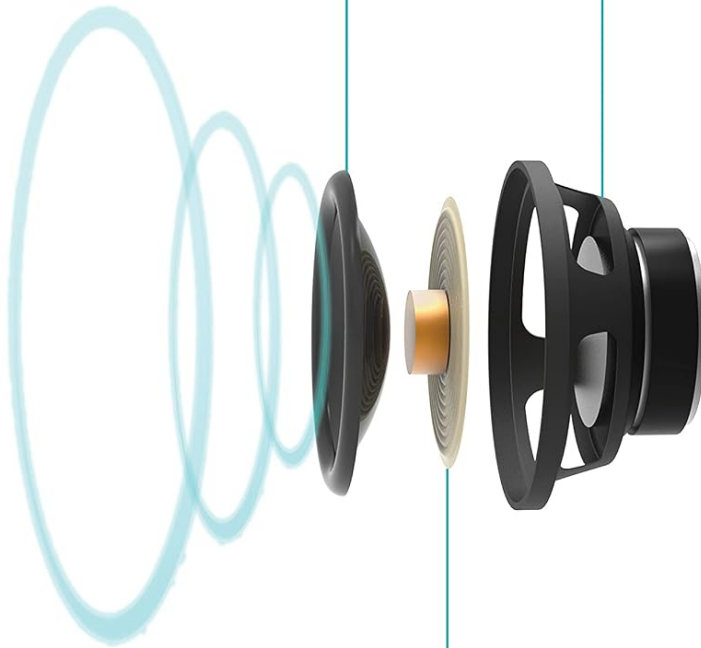

Full Range Speaker & ASP

Patented acoustic engineering for premium sound quality.



Image: The VQ Monty radio with the Bluetooth logo and icons for various music streaming services, illustrating its wireless connectivity capabilities.

3.3 Additional Ports for Convenience

The VQ Monty includes a handy USB charging port, allowing you to charge your mobile devices while listening to the radio. A headphone socket is also available for private listening, ensuring you can enjoy your audio without disturbing others.

Headphone Jack

Need to listen privately?
Connect any headphones
and listen without disturbing
anyone else.

3.5mm Aux-in

Don't have Bluetooth?
Instead connect your device
with an aux cable.

USB Charge Port

Short on plug sockets? Charge
your phone/tablet for the
radio in no time.



Image: Rear view of the VQ Monty radio, highlighting the headphone jack, 3.5mm Aux-in port, and USB charge port with descriptive labels.

3.4 Integrated Alarm Clock

This radio features dual alarms with customizable week and weekend settings. Additional functions include snooze, sleep timer, and countdown, making it an ideal bedside companion.

3.5 Premium Design and Audio Quality

Crafted with a real-wood body, the VQ Monty not only offers a sophisticated aesthetic but also enhances sound quality. It features a custom-mounted 10 Watt speaker driver and an ultra-wide cone for balanced, room-filling sound, supported by patented acoustic engineering for premium audio performance.



This Product has its quality independently verified by the Digital Tick standard, which means you will receive all the stations broadcast in your area and the product is future-ready, so you can buy with confidence.



Image: Close-up view of the VQ Monty radio, emphasizing the premium PU leather handle and the natural grain of the real wood case.



Connect your phone/tablet wireless and enjoy music from these and any other service:-



Image: An exploded diagram illustrating the internal speaker components of the VQ Monty, including the 10 Watt driver and ultra-wide cone, highlighting its acoustic design.

4. SETUP GUIDE

1. **Power Connection:** Connect the supplied power adapter to the DC IN socket on the back of the radio and plug it into a wall outlet.
2. **Antenna:** Fully extend the telescopic antenna located on the back of the radio for optimal DAB/DAB+ and FM reception.
3. **Initial Power On:** Press the **Power** button to turn on the radio. The display will illuminate.
4. **Automatic Scan (DAB):** Upon first power-on, the radio will automatically perform a full scan for DAB/DAB+ stations. This may take a few minutes. Once complete, the radio will tune to the first available station.
5. **Setting Time and Date:** The time and date are usually set automatically via DAB or FM signals. If not, you can manually adjust them through the system settings menu.
6. **Optional Battery Installation:** If you wish to use the radio portably, install the compatible rechargeable battery (sold separately) into the battery compartment on the underside of the unit. Ensure correct polarity.

5. OPERATING INSTRUCTIONS

1. **Power On/Off:** Press the **Power** button to turn the radio on or off.
2. **Mode Selection:** Press the **MODE** button repeatedly to cycle through available modes: DAB, FM, Bluetooth, and Aux-in.
3. **Volume Control:** Use the + and - buttons to adjust the volume level.
4. **DAB/DAB+ Radio:**
 - **Station Scan:** In DAB mode, press and hold the **MENU** button, then select "Full Scan" to search for all available stations.
 - **Tuning:** Use the < and > buttons to navigate through the list of available stations. Press **OK** to select a station.
 - **Saving Presets:** To save a station, press and hold the **PRESET** button. Use < and > to choose a preset number (1-60), then press **OK** to confirm.
 - **Recalling Presets:** Briefly press the **PRESET** button, then use < and > to select the desired preset. Press **OK** to tune.
5. **FM Radio:**
 - **Auto Scan:** In FM mode, press and hold the **MENU** button, then select "Auto Scan" to find and save stations.
 - **Manual Tuning:** Use the < and > buttons for fine-tuning.
 - **Saving/Recalling Presets:** Follow the same procedure as for DAB radio.
6. **Bluetooth Pairing:**
 - Switch the radio to Bluetooth mode. The display will show "Pairing" or "Waiting for connection".
 - On your Bluetooth-enabled device (smartphone, tablet), enable Bluetooth and search for available devices.
 - Select "VQ Monty" from the list. Once connected, the radio will confirm the connection.
7. **Aux-in Mode:**
 - Connect an external audio device (e.g., MP3 player) to the 3.5mm Aux-in port on the back of the radio using a standard 3.5mm audio cable (not supplied).
 - Switch the radio to Aux-in mode. Audio from your connected device will now play through the radio's speaker.
8. **Alarm Clock:**
 - **Setting Alarms:** Press the **MENU** button, navigate to "System Settings" then "Alarm". Follow the on-screen prompts to set alarm time, source (DAB/FM/Buzzer), frequency (Daily/Weekdays/Weekends), and volume.
 - **Snooze:** When an alarm sounds, press any button (except Power) to activate snooze. The alarm will sound again after a set interval.
 - **Sleep Timer:** Set the radio to turn off automatically after a specified period via the "Sleep" option in System Settings.
 - **Countdown Timer:** Set a countdown timer for various activities via the "Countdown" option in System Settings.
9. **USB Charging:** Connect your mobile device's USB charging cable to the USB port on the back of the radio to charge your device. Note that this port is for charging only and does not support data transfer.
10. **Headphone Use:** Plug standard 3.5mm headphones into the headphone jack on the back of the radio for private listening. The radio's speaker will automatically mute.

6. MAINTENANCE

- **Cleaning:** To clean the radio, gently wipe the surfaces with a soft, dry, lint-free cloth. Do not use abrasive cleaners, waxes, or solvents as these may damage the finish.
- **Antenna Care:** Handle the telescopic antenna with care. Do not force or bend it, as this can impair reception.
- **Battery Care (if applicable):** If using a rechargeable battery, ensure it is charged regularly, especially if the radio will be stored for an extended period. Follow the battery manufacturer's guidelines for optimal performance and lifespan.
- **Storage:** When not in use for a long time, disconnect the power adapter and, if applicable, remove the battery. Store the radio in a cool, dry place away from direct sunlight and extreme temperatures.

7. TROUBLESHOOTING

Problem	Possible Cause / Solution
No power / Radio does not turn on.	• Ensure the power adapter is securely connected to both the radio and a working wall outlet. • If using battery power, check if the battery is charged and correctly installed.
Poor DAB/FM reception.	• Fully extend the telescopic antenna. • Reposition the radio to a location with better signal strength, away from other electronic devices that may cause interference. • Perform a full scan for DAB stations.
Bluetooth device will not pair.	• Ensure the radio is in Bluetooth pairing mode. • Make sure Bluetooth is enabled on your device and it is within range (typically 10 meters). • Forget "VQ Monty" from your device's Bluetooth list and try pairing again. • Ensure no other device is currently connected to the radio via Bluetooth.
No sound from speaker.	• Check the volume level on the radio and the connected device (if using Bluetooth/Aux-in). • Ensure headphones are not plugged in, as this will mute the speaker. • Verify the correct mode (DAB, FM, Bluetooth, Aux-in) is selected.
Alarm does not sound.	• Check that the alarm is enabled and set to the correct time and frequency (e.g., Weekdays, Weekends, Daily). • Ensure the alarm volume is not set to zero. • If the alarm source is a radio station, ensure the station is available and has a strong signal.

Problem	Possible Cause / Solution
Station presets do not work.	• Ensure you are correctly saving and recalling presets as per section 5. • If issues persist, a factory reset may resolve the problem (refer to System Settings menu).

8. SPECIFICATIONS

Feature	Detail
Product Dimensions	13.4L x 9.8W x 18.4H centimetres (13.4 x 9.8 x 18.4 cm)
Item Weight	1.39 kg
Model Number	VQ-MONTY-BK&WT
Brand	VQ
Colour	Black & Walnut
Special Features	Alarm clock, Wireless speakers (Bluetooth)
Connectivity Technology	USB, Bluetooth, 3.5mm Aux-in
Tuner Technology	DAB+
Power Source	Battery Powered (optional, battery not included), Mains Powered (via adapter)
Radio Bands Supported	DAB, DAB+, FM
Included Components	Power Adapter, Owner's Manual

9. WARRANTY AND SUPPORT

The VQ Monty DAB Radio comes with a three-year warranty, providing peace of mind regarding its quality and durability. For any technical assistance, troubleshooting beyond this manual, or warranty claims, please contact VQ customer support through their official website or the retailer where the product was purchased. Please retain your proof of purchase for warranty validation.

For more information and support, visit the official VQ Store:[VQ Store on Amazon](#)

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question