Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

GODOX SL-60W-US-OP

Godox SL-60W LED Video Light Instruction Manual

Model: SL-60W-US-OP | Brand: GODOX

Introduction

The Godox SL-60W is a high-quality, continuous output LED video light designed for professional photography and videography. It features a powerful 60W LED bead, high CRI 95+ for accurate color rendering, and a stable 5600K color temperature. This manual provides detailed instructions for the safe and effective use of your SL-60W LED video light.



Figure 1: Godox SL-60W LED Video Light with included accessories.

Safety Precautions

- Do not expose the unit to rain or damp conditions.
- Do not disassemble. If repairs become necessary, this product must be sent to an authorized maintenance center.
- Keep out of reach of children.
- Do not operate in the presence of flammable gases or liquids.
- Unplug from power source when not in use or before cleaning.
- Avoid direct eye exposure to the light source.
- Ensure proper ventilation to prevent overheating.

Package Contents



Figure 2: Contents of the Godox SL-60W package.

- SL-60W LED Video Light (1)
- Standard Reflector (1)
- RC-A5 Remote Control (1)
- Power Cable (1)
- Lamp Cover (1)

Product Overview

Familiarize yourself with the main components of the Godox SL-60W LED Video Light.



Figure 3: High-quality 60W LED bead with integrated heat sink.



Figure 4: Rear panel controls and LCD display.

1. **LED Bead:** Powerful 60W LED light source.
2. **Bowens Mount:** Universal mount for various light modifiers.
3. **Heat Sink & Cooling Fan:** Designed for efficient heat dissipation and quiet operation.
4. **LCD Panel:** Displays channel, group, light brightness, and temperature.
5. **Control Dial:** Adjusts brightness and navigates settings.
6. **SET Button:** Confirms selections.
7. **CH/GRP Button:** Switches between channel and group settings.
8. **ON/OFF Power Switch:** Controls power to the unit.
9. **AC Power Jack:** For connecting the power cable.

Setup

1. **Mounting the Light:**
   Attach the SL-60W to a compatible light stand using the integrated mounting bracket. Secure it firmly by tightening the locking knob.
2. **Attaching the Reflector:**
   Align the three mounting pins on the standard reflector with the corresponding slots on the Bowens mount of the light. Insert and twist clockwise until it locks into place.



Figure 5: The universal Bowens mount allows for various light modifiers.

3. **Connecting Power:**
   Insert the power cable into the AC Power Jack on the rear of the light, then plug the other end into a suitable power outlet (AC 100-240V ~ 50/60Hz).

Operating Instructions

Power On/Off

- To power on the light, flip the ON/OFF Power Switch to the 'ON' position.
- To power off, flip the switch to the 'OFF' position.

Adjusting Brightness

- Once powered on, the LCD panel will display the current brightness level.
- Rotate the Control Dial to adjust the light brightness from 10% to 100%.



Figure 6: Adjusting brightness and viewing temperature on the LCD panel.

Using the RC-A5 Remote Control

The RC-A5 remote control allows for wireless adjustment of light brightness and grouping.



Figure 7: Wireless control with the RC-A5 remote.

- **Channel Setting:** Press the CH/GRP button on the remote to select the channel. Rotate the dial to change the channel (1-16).
- **Group Setting:** Press the CH/GRP button again to select the group. Rotate the dial to change the group (A-F).
- **Brightness Adjustment:** Rotate the dial on the remote to adjust the brightness of the light.
- **Temperature Display:** The remote can also display the temperature in Celsius or Fahrenheit.

Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the light body. Do not use abrasive cleaners or solvents.
- **Storage:** Store the light in a cool, dry place away from direct sunlight and moisture. Ensure the lamp cover is in place to protect the LED bead.
- **Heat Dissipation:** The SL-60W features an optimized cooling fan. Ensure the fan vents are not obstructed during operation to maintain optimal performance and prevent overheating.

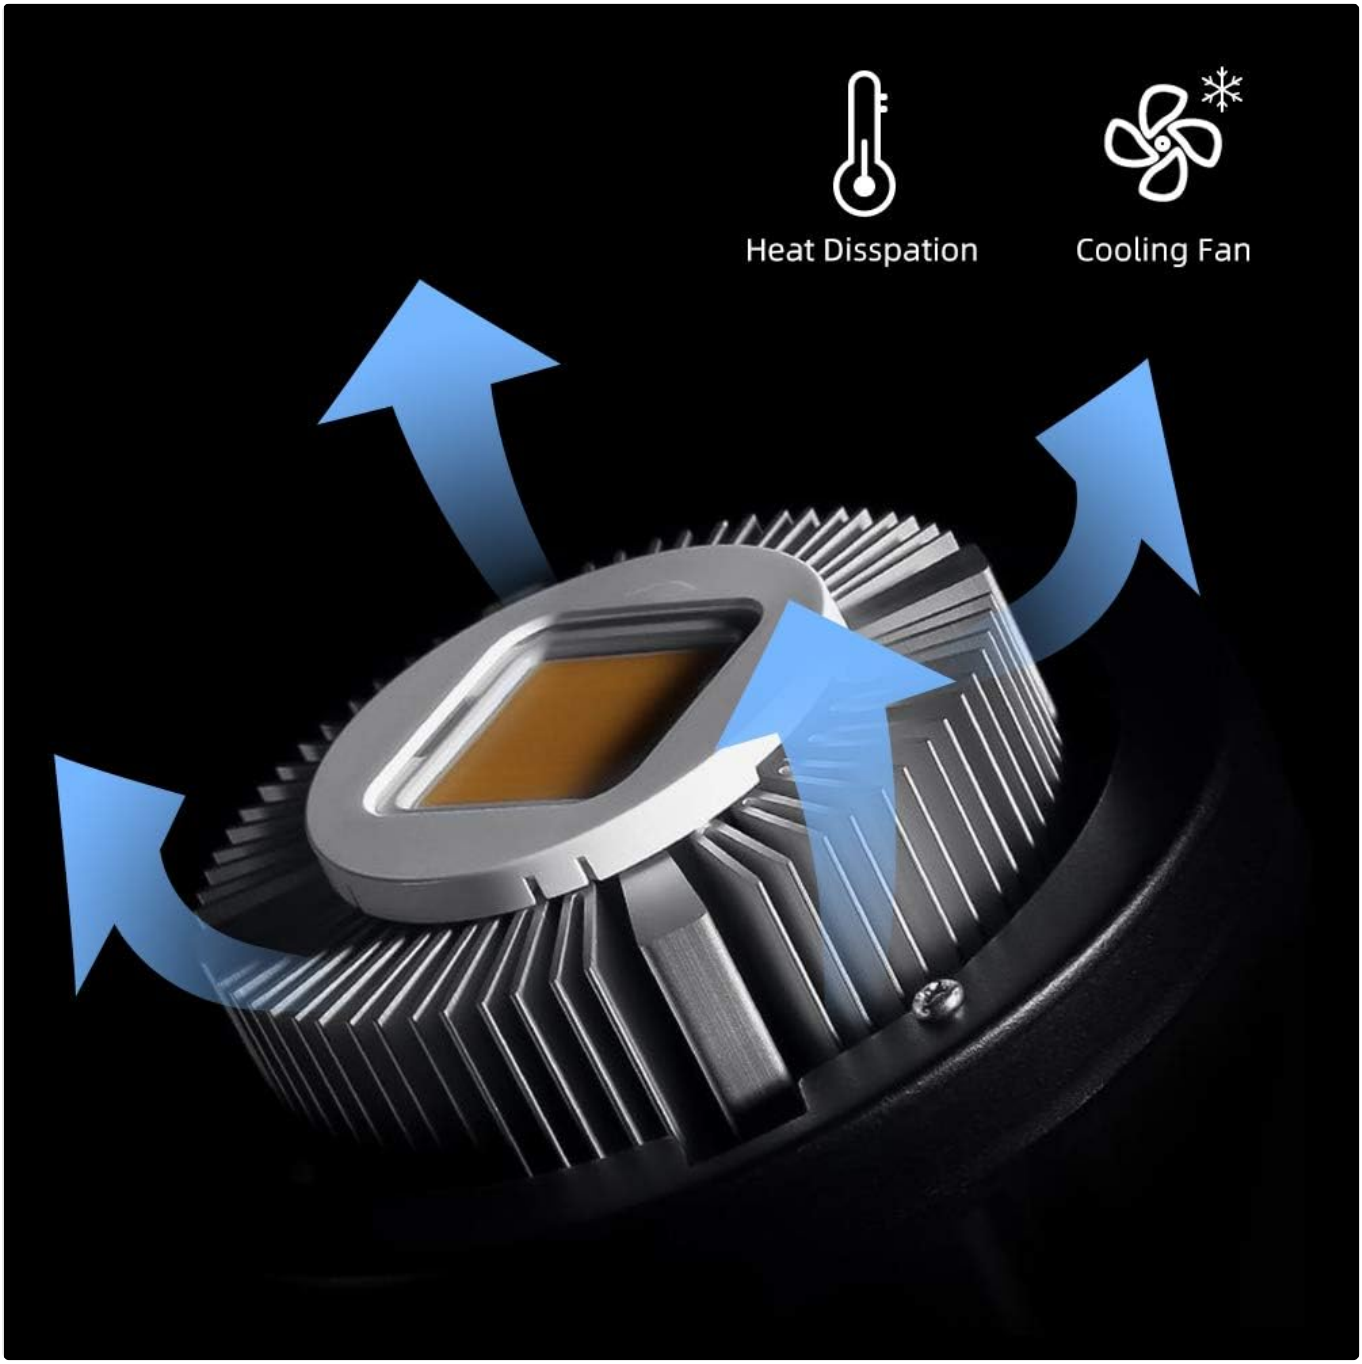


Figure 8: Internal heat dissipation system with cooling fan.

Troubleshooting

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; Power switch off; Faulty cable.	Check power connection; Ensure switch is ON; Try a different power cable.
Light output is weak or flickering.	Low brightness setting; Overheating; Damaged LED bead.	Increase brightness; Ensure proper ventilation; Contact support if problem persists.
Remote control not working.	Incorrect channel/group; Dead batteries; Obstruction.	Verify channel/group settings; Replace remote batteries; Remove obstructions between remote and light.

Problem	Possible Cause	Solution
Light is making unusual noise.	Fan obstruction; Internal issue.	Check for fan obstructions; If noise persists, discontinue use and contact support.

Specifications

Feature	Detail
Model	SL-60W-US-OP
Power Output	60W
Color Temperature	5600K ± 300K
CRI	>95
TLCI	>90
100% Illuminance (LUX)	4100 (1m with standard reflector)
Brightness Adjustment Range	10% - 100%
Remote Control	RC-A5 (433MHz wireless, 6 groups, 16 channels)
Operating Temperature	-10°C to 50°C
Dimensions	24 x 14 x 23 inches (Product)
Weight	5.83 pounds

Warranty and Support

Godox products are designed and manufactured to the highest quality standards. For information regarding warranty coverage and support, please refer to the warranty card included with your product or visit the official Godox website. For technical assistance or service inquiries, please contact Godox customer support through their official channels. Keep your purchase receipt as proof of purchase for warranty claims.
Official Godox Website: www.godox.com

© 2024 GODOX. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B094ZJNM6Y

More documents and user manuals: **https://manuals.plus/**