

[Manuals.plus](#) /

› [NOYITO](#) /

› NOYITO 12.6V 1A 1000mA Adapter User Manual

NOYITO 1261000

NOYITO 12.6V 1A 1000mA Adapter User Manual

Model: 1261000

INTRODUCTION

This user manual provides essential information for the safe and effective operation of your NOYITO 12.6V 1A 1000mA Adapter. Please read this manual thoroughly before use and retain it for future reference.

PACKAGE CONTENTS

- 1 x NOYITO 12.6V 1A Power Adapter



Image: The NOYITO 12.6V 1A Power Adapter, showing the main adapter unit with its two-prong plug and the attached DC output cable with a barrel connector.


SPECIFICATIONS

Parameter	Value
Input Voltage	AC 100-240V, 50/60Hz
Output Voltage	DC 12.6V ±0.2V
Output Current	1A (1000mA)
Output Mode	Constant Voltage, Constant Current (CC CV)
Suitable for	11.1V / 12.6V 3-string Lithium Battery Packs
Output Wire Length	1.1 meter / 3.5ft
Output Interface	DC 5.5 x 2.5 / 2.1mm (positive inside, negative outside)
Product Dimensions	3.15 x 2.76 x 0.98 inches
Item Weight	2.12 ounces

Special
Features

Over-current protection, Over-discharge protection, Over-voltage protection, Overcharge protection,
Short circuit protection

Adapter DC Port Specification:

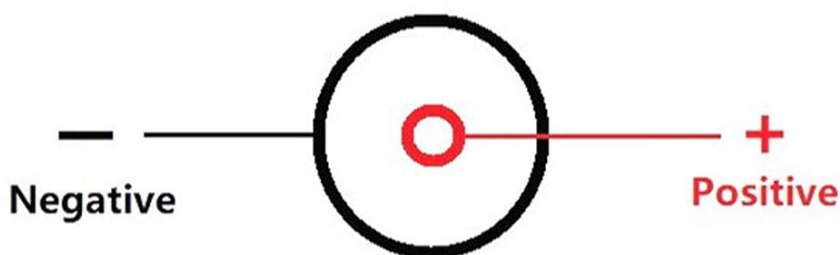

Suitable for 5.5x2.5 2.1 mm DC Port Devices

Before you order the product, you must confirm whether the DC port of the adapter matches the DC port of your device.

If they do not match the adapter will not be able to power your device.

Image: Diagram illustrating the DC port specification, showing the positive (+) and negative (-) polarity for a 5.5x2.5 / 2.1mm DC port, with positive inside and negative outside.

SETUP AND CONNECTION

1. **Verify Compatibility:** Before connecting, confirm that the DC interface of this adapter (5.5 x 2.5 / 2.1mm, positive inside, negative outside) matches the input port of your device. Incompatibility can prevent proper function or cause damage.
2. **Connect to Device:** Insert the DC output plug of the adapter firmly into the charging port of your compatible device (e.g., 11.1V or 12.6V 3-string Lithium Battery Pack).
3. **Connect to Power Outlet:** Plug the adapter's AC prongs into a standard AC 100-240V, 50/60Hz wall outlet.

OPERATING INSTRUCTIONS

Charging Process LED Indicator:

- **No-load Status:** When the adapter is plugged into a power outlet but not connected to a device, the LED indicator will be **green**.
- **Charging (Constant Current Phase):** When charging begins, the LED indicator will be **red**. This signifies the first phase of constant current charging.
- **Charging (Constant Voltage Phase):** After reaching the rated voltage, the charger enters the second phase of constant voltage charging, and the current slowly decreases. The LED remains **red** during this phase.
- **Fully Charged:** When the battery power reaches approximately 90-95% of its capacity, the LED light will turn **green**. The charger will continue to charge with a small current until the battery is completely full.



Image: Visual representation of the charger's LED indicator states: green when not charging, red when actively charging, and green again when fully charged.

MAINTENANCE

- Keep the adapter clean and dry. Avoid exposure to moisture or extreme temperatures.
- Do not attempt to open or modify the adapter. This will void the warranty and may cause damage or injury.
- Store the adapter in a cool, dry place when not in use.
- Regularly inspect the cable and connectors for any signs of damage. If damage is found, discontinue use immediately.

TROUBLESHOOTING

Protection Mode (Flashing Red Light):

This product is equipped with multiple protection functions, including over-current, over-discharge, over-voltage, overcharge, and short circuit protection. If the adapter enters protection mode, the LED light will flash **red**.

When this occurs, immediately unplug the adapter from both the power outlet and your device. Then, investigate the following:

- **Short Circuit:** Check if the circuit connected to your device has a short circuit.
- **Overload:** Ensure that the electrical power required by your device does not exceed the rated power of the adapter (12.6V 1A).
- **Incompatible Device:** Verify that your device's DC interface and voltage requirements are compatible with this adapter.

After addressing the potential issue, you may attempt to reconnect the adapter. If the issue persists, discontinue use and contact support.

WARRANTY INFORMATION

This NOYITO adapter comes with a **one-year warranty** against non-artificial damage from the date of purchase. Please retain your proof of purchase for warranty claims.

The warranty does not cover damage caused by misuse, unauthorized modification, accident, or improper installation.

SUPPORT

If you require any assistance with the use of your NOYITO 12.6V 1A 1000mA Adapter, please contact NOYITO customer support. Refer to the product packaging or the seller's information for contact details.

© 2025 NOYITO. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B095MTMCB3>

More documents and user manuals: <https://manuals.plus/>