

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [LWYTJO](#) /

› [LWYTJO 3-Light Linear Chandelier Instruction Manual](#)

LWYTJO 3-Light Linear Chandelier

LWYTJO 3-Light Linear Chandelier Instruction Manual

Model: 3-Light Linear Chandelier

Brand: LWYTJO

INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your LWYTJO 3-Light Linear Chandelier. Please read this manual thoroughly before beginning installation and retain it for future reference. Proper installation and adherence to safety guidelines are crucial for optimal performance and safety.



Image: The LWYTJO 3-Light Linear Chandelier with a gold finish and clear glass shades, installed above a kitchen island.

SAFETY INFORMATION

WARNING: To reduce the risk of fire, electric shock, or personal injury, always turn off the main power supply at the circuit breaker before installation or maintenance. Ensure all electrical connections comply with local codes and ordinances. If you are unsure about wiring, consult a qualified electrician.

- Do not connect electricity until your fixture is fully assembled.
- Do not touch the bulb when the fixture is operating or look directly at the lit bulb.
- Keep flammable materials away from the lit bulb.
- Use only the specified bulb type and wattage.
- This fixture is intended for indoor use only.

PACKAGE CONTENTS

Carefully unpack your new light fixture and lay out all parts on a clean, flat surface. Verify that all components

listed below are present and undamaged. If any parts are missing or broken, contact customer service immediately.

- Mounting Hardware (screws, wire nuts, mounting plate)
- Canopy
- Adjustable Rods (multiple lengths for height customization)
- Linear Bar with 3 Light Sockets
- Glass Shades (3 pieces)

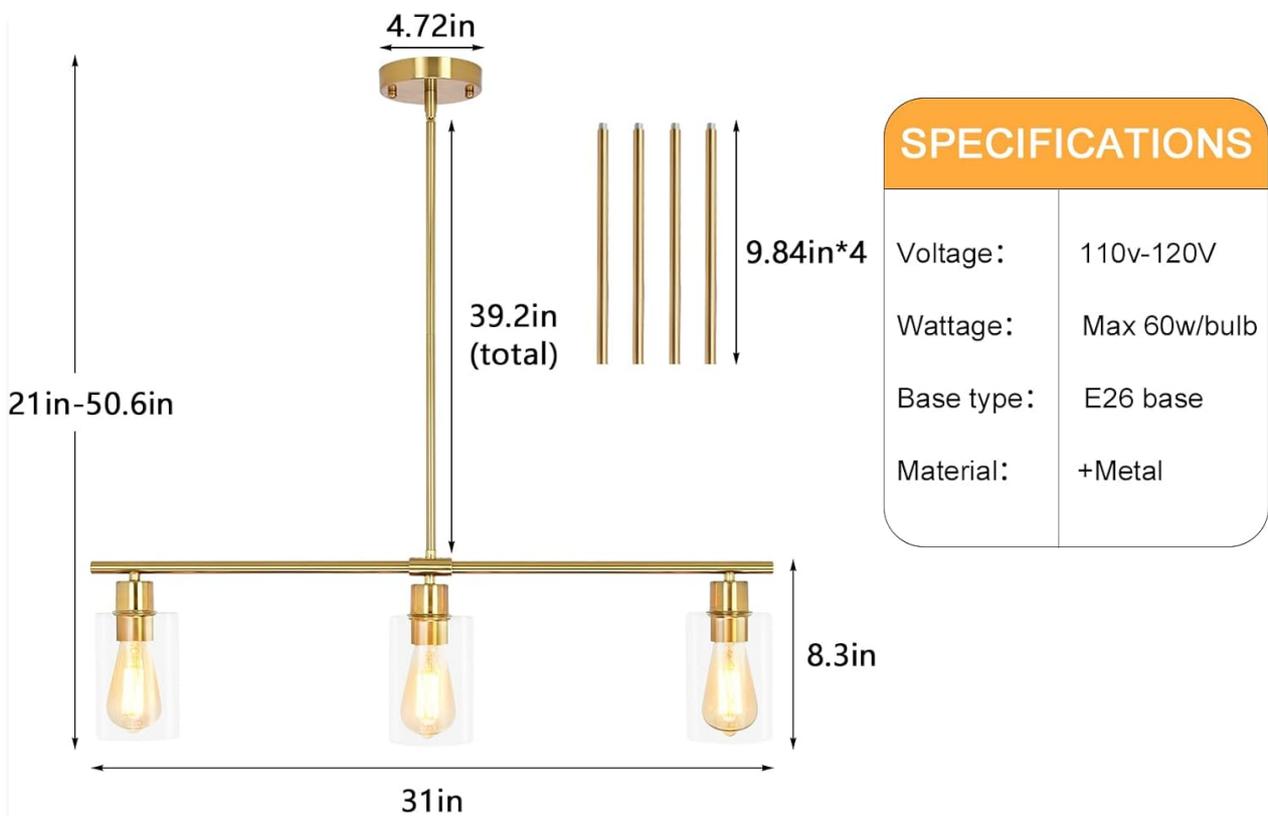


Image: All components of the chandelier laid out, including the canopy, rods, linear bar, glass shades, and mounting hardware.

SPECIFICATIONS

Feature	Detail
Brand	LWYTJO

Model Name	3-Light Linear Chandelier
Color	Gold Island Light
Material	Metal, Glass
Product Dimensions	17.52"L x 6.89"W x 11.02"H (Fixture body only)
Adjustable Height Range	21" to 50.6" (using included rods)
Number of Light Sources	3
Bulb Base	E26
Max Wattage per Bulb	60 Watts
Voltage	110 Volts
Dimmable	Yes (with compatible dimmer switch, not included)
Installation Type	Semi Flush Mount / Ceiling Mount
Special Features	Adjustable Height, Anti-Rust, Dimmable, Sloped Ceiling Compatible



Compatible with all E26 bulbs

(Bulb not included)



Image: Detailed diagram showing the dimensions of the chandelier and key specifications like voltage, wattage, and bulb base.

SETUP AND INSTALLATION

Follow these steps for proper installation. It is recommended to have a second person assist during installation.

- 1. Turn off Power:** Before starting, ensure the power supply to the installation area is completely off at the circuit breaker.
- 2. Mounting Plate Installation:** Attach the mounting plate to the junction box in your ceiling using the provided screws.
- 3. Assemble Rods:** Determine the desired hanging height. The fixture includes multiple 9.8" rods that can be combined to achieve heights from 21" to 50.6". Thread the electrical wires through the chosen rods and connect them to the linear bar and canopy.
- 4. Wiring:** Connect the fixture's wires to your household electrical wires. Typically, black to black (live), white to white (neutral), and bare copper or green to green (ground). Secure connections with wire nuts.
- 5. Canopy Attachment:** Secure the canopy to the mounting plate, ensuring all wires are tucked neatly inside the junction box.

6. **Install Glass Shades and Bulbs:** Carefully attach the clear glass shades to the light sockets. Insert E26 base bulbs (not included) into each socket.

This fixture is designed for versatility and can be installed on both flat and sloped ceilings. The pivot point at the canopy allows for adjustment to match your ceiling angle.



Image: Close-up views highlighting the sloped ceiling adapter, the metal construction, and the clear glass shade design.

1



The Height with 1 rod: 21.06 inch

2



The Height with 2 rods: 30.9 inch

3



The Height with 3 rods: 40.74 inch

4



The Height with 4 rods: 50.6 inch

Image: Visual representation of the chandelier's adjustable height, showing configurations with 1, 2, 3, and 4 rods, resulting in heights from 21.06 inches to 50.6 inches.

Installation Video Guide

Your browser does not support the video tag.

Video: An official LWYTJO video demonstrating the assembly process of the 3-Light Linear Chandelier. This video provides a visual guide to help with the installation steps.

OPERATING INSTRUCTIONS

Once installed, your LWYTJO 3-Light Linear Chandelier is ready for use. Ensure the power is restored at the circuit breaker.

- **Power On/Off:** Operate the light fixture using your standard wall switch.
- **Bulb Compatibility:** This fixture is compatible with 3 x E26 base bulbs, including LED, Edison, incandescent, CFL, and halogen types. Do not exceed 60 watts per bulb.
- **Dimmable Functionality:** The chandelier is fully dimmable when used with compatible dimmable E26

bulbs and a separate dimmer switch (not included).

MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your light fixture.

- **Cleaning:** To clean, turn off the power and allow the fixture to cool. Wipe the metal parts with a soft, dry cloth. Clean the glass shades with a mild glass cleaner and a soft cloth. Avoid abrasive cleaners or solvents that may damage the finish.
- **Bulb Replacement:** Ensure the power is off and bulbs are cool before replacing. Unscrew the old bulb and screw in a new E26 base bulb, ensuring it does not exceed 60 watts.

TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	No power, loose wiring, faulty bulb	Check circuit breaker. Verify all wire connections. Replace bulb.
Light flickers	Loose bulb, incompatible dimmer, faulty wiring	Tighten bulbs. Ensure dimmer switch and bulbs are compatible. Check wiring connections.
Fixture is unstable	Improper mounting	Ensure mounting plate is securely fastened to the junction box and canopy is tight.

WARRANTY AND SUPPORT

LWYTJO products are manufactured with quality and durability in mind. For specific warranty details, please refer to the documentation included with your purchase or visit the official LWYTJO website. If you require further assistance, have questions about installation, or need to report a missing or damaged part, please contact LWYTJO customer support.