

ORYMUSE HXYC510A-B1-FBA

ORYMUSE 200 Bottle Single Zone Wine Cooler Refrigerator

Model: HXYC510A-B1-FBA

User Manual

1. INTRODUCTION

This manual provides essential information for the proper installation, operation, and maintenance of your ORYMUSE 200 Bottle Single Zone Wine Cooler Refrigerator. Please read these instructions thoroughly before using the appliance to ensure safe and efficient operation. Keep this manual for future reference.

2. IMPORTANT SAFETY INSTRUCTIONS

WARNING:

- To reduce the risk of fire, electric shock, or injury, follow basic precautions.
- Do not touch cold surfaces immediately after the unit has been plugged in.
- Ensure the appliance is properly grounded.
- Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- Do not damage the refrigerant circuit.
- Do not use electrical appliances inside the storage compartments unless they are of the type recommended by the manufacturer.
- Unplug the appliance before cleaning or performing maintenance.
- After receiving the machine, please leave it for more than 24 hours before starting the machine. This allows the compressor oils to settle.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

- Children should be supervised to ensure that they do not play with the appliance.
- The built-in safety lock helps secure your valuable bottles. Keep keys out of reach of children.

3. PACKAGE CONTENTS

Upon unpacking, verify that all items are present and undamaged:

- ORYMUSE 200 Bottle Single Zone Wine Cooler Refrigerator
- Beech Wood Shelves (16 units)
- Door Handle
- Keys for Safety Lock
- User Manual (this document)





Image: Front view of the ORYMUSE 200 Bottle Single Zone Wine Cooler Refrigerator.

4. INSTALLATION

4.1 Placement

- This appliance is designed for both built-in and freestanding installation.
- Ensure adequate ventilation around the unit. The front ventilation design allows for flexible placement.
- Avoid placing the unit in direct sunlight or near heat sources (e.g., oven, radiator).
- Maintain a stable ambient temperature between 60°F (16°C) and 90°F (32°C) for optimal performance.



Image: Illustration showing the wine cooler installed as both a built-in unit within cabinetry and as a freestanding appliance.

4.2 Leveling

The appliance must be level for proper operation. Adjust the leveling legs at the bottom of the unit as needed.

4.3 Electrical Connection

- Connect the appliance to a dedicated, grounded 115 Volt, 60 Hz AC outlet.
- Do not use extension cords or adapter plugs.
- Ensure the power cord is not pinched or damaged.

5. OPERATION

5.1 Control Panel

The wine cooler features an intelligent touch control panel for easy temperature management and settings adjustment.



Image: Close-up of the control panel showing buttons for LED light, °C/°F switch, temperature unlock, digital display, temperature up, temperature down, and power on/off.

- **LED Light Control:** Press to turn the interior LED lighting on or off.
- **°C/°F Switch:** Toggle between Celsius and Fahrenheit temperature display.
- **Temperature Unlock:** Press and hold to unlock the temperature setting controls.
- **Digital Display:** Shows the current internal temperature.
- **Temperature Up/Down:** Adjust the desired temperature. The temperature range is 40-65°F (5-18°C).
- **Power On/Off:** Press and hold to turn the unit on or off.

5.2 Temperature Setting

After unlocking the temperature controls, use the Up and Down arrows to set your desired temperature. The unit will automatically adjust to maintain this setting. The upgraded compressor provides stable cooling with low noise and minimal vibration.

The system features a temperature memory function that restores the previous setting after a power failure.

5.3 Carbon Purification System

The built-in activated carbon filtration system continuously purifies the air inside the cooler, reducing odors and maintaining a fresh storage atmosphere for your wine.

6. LOADING BOTTLES

This wine cooler can accommodate up to 200 Bordeaux-style 750ml wine bottles (standard Bordeaux size: 11.8"H x 2.75"W).

LOW NOISE OPERATION, ENJOY WINE TIME

Revel in the delightful process of preserving your wines, all while enjoying the tranquility that comes with it.

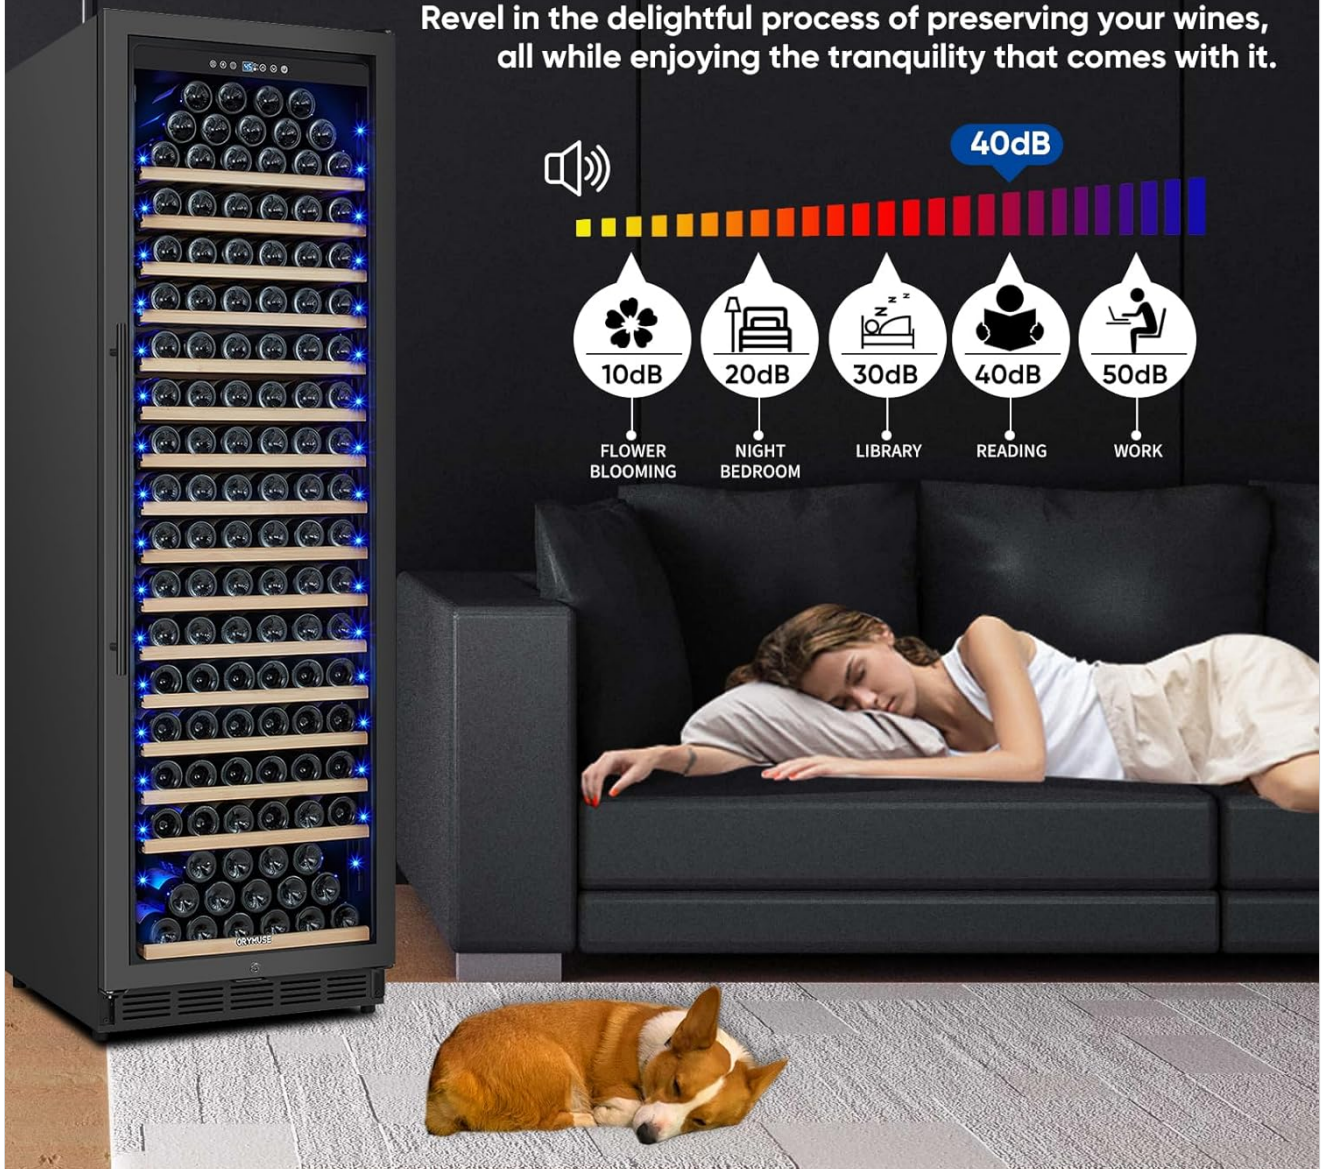


Image: Close-up of the interior showing multiple rows of wine bottles resting on beech wood shelves.

- The unit features 16 removable, smooth-sliding beech wood shelves.
- Shelves can be adjusted or removed to accommodate bottles of various sizes.
- Ensure bottles are placed securely to prevent rolling or damage.
- Avoid overloading shelves to allow for proper air circulation.

7. MAINTENANCE

7.1 Cleaning

- Always unplug the unit before cleaning.
- Clean the interior with a mild detergent and warm water. Do not use abrasive cleaners.
- Wipe down the exterior with a soft cloth. The anti-fingerprint and corrosion-resistant surface requires minimal effort.
- Clean the door gasket regularly to ensure a proper seal.

7.2 Defrosting

The unit features an automatic defrost system, minimizing the need for manual defrosting.

7.3 Long-Term Storage

If the unit will not be used for an extended period:

1. Remove all bottles.
2. Unplug the appliance.
3. Clean the interior thoroughly.
4. Leave the door slightly ajar to prevent odor and mold growth.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Unit does not operate	Not plugged in; circuit breaker tripped; power switch off.	Ensure plug is secure; check circuit breaker; turn power switch on.
Temperature is not cold enough	Door not closed properly; excessive door openings; warm ambient temperature; temperature setting too high.	Check door seal; reduce door openings; ensure proper ventilation; lower temperature setting.
Unit is noisy	Unit not level; vibrating against wall; normal compressor operation.	Adjust leveling legs; move unit away from wall; compressor noise is normal.
Vibration	Unit not level.	Adjust leveling legs.
Moisture buildup on glass door	High humidity; frequent door openings.	This is normal in humid conditions; reduce door openings.

9. SPECIFICATIONS


Feature	Detail
Brand	ORYMUSE
Model Number	HXYC510A-B1-FBA
Capacity	200 Bordeaux-style 750ml bottles (15.8 Cubic Feet)
Temperature Range	40-65°F (5-18°C)
Installation Type	Built-In or Freestanding
Dimensions (D x W x H)	27.17 x 23.54 x 76.78 inches
Item Weight	180 pounds
Voltage	115 Volts

Feature	Detail
Annual Energy Consumption	250 Kilowatt Hours Per Year
Shelves	16, Beech Wood, Removable
Door Material	Stainless Steel + Tempered Glass (Double Layer)
Defrost System	Automatic
Special Features	Energy Efficient, Front Ventilation, Low Noise, Quiet, Touch Control, Carbon Filter
Certifications	DOE, ETL

ORYMUSE

200 BOTTLES LARGE CAPACITY BUILT-IN OR FREESTANDING WINE FRIDGE

Dimension 76.78" H × 27.17" D × 23.54" W	Power 115V~60HZ
Certification ETL, DOE	Watts 150W
Noise ≤40dB	Weight 231.5 lbs



**Up To
200 Bottles**

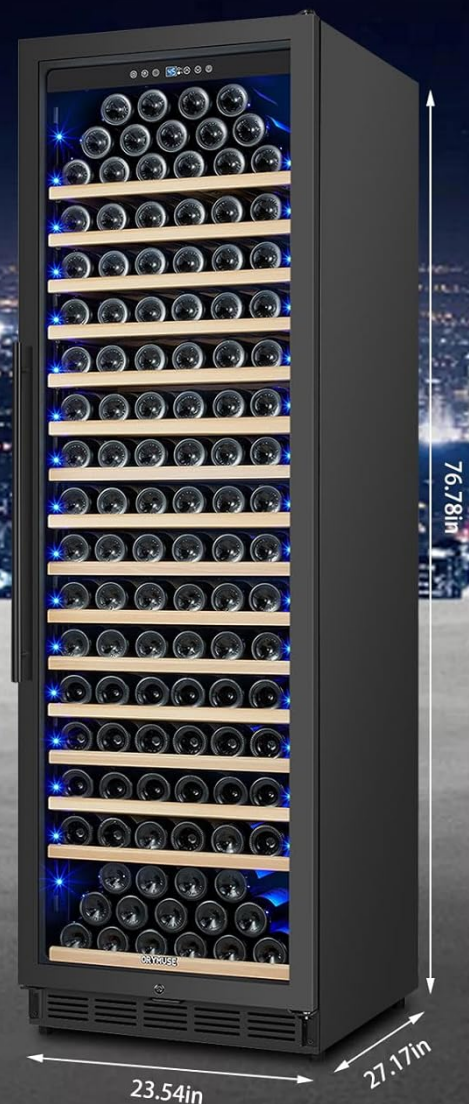


Image: Diagram illustrating the dimensions (76.78"H x 27.17"D x 23.54"W) and key specifications of the ORYMUSE wine cooler, including power, noise level, weight, and bottle capacity.

10. WARRANTY AND CUSTOMER SUPPORT

ORYMUSE offers a comprehensive **1-year warranty** on this product. For any questions, concerns, or warranty claims, please contact ORYMUSE customer support. Their dedicated team is committed to providing assistance and ensuring customer satisfaction.

For support, please refer to the contact information provided with your purchase or visit the official ORYMUSE website.