

StarTech SV231DHU34K6

StarTech.com 2 Port Dual Monitor HDMI KVM Switch

Model: SV231DHU34K6

1. INTRODUCTION

This instruction manual provides detailed information on the installation, operation, and maintenance of your StarTech.com 2 Port Dual Monitor HDMI KVM Switch. This device allows you to control two computers from a single set of peripherals, including two HDMI monitors, a keyboard, a mouse, and other USB devices, supporting resolutions up to 4K at 60Hz.

2. SAFETY INFORMATION

Please read and understand all instructions before using this product. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- Electrical Hazards:** Do not use damaged or frayed cables. Exposed wires can lead to electric shocks. Ensure all cables are properly connected and secured to prevent accidental disconnection.
- Heat Buildup:** Overloaded or tightly bundled cables can overheat and pose a fire hazard. Ensure adequate ventilation and avoid bundling power cables.
- Damage:** Always unplug adapters by holding the plug, not the cable. Pulling by the cable can expose live wires, which could lead to electrical shocks or burns.

3. PRODUCT OVERVIEW

The StarTech.com SV231DHU34K6 KVM switch is designed to streamline your workspace by enabling control of two computers with dual 4K HDMI displays and shared USB peripherals. Its robust steel housing ensures durability.

3.1. Key Features

- Supports dual 4K (3840 x 2160) resolution at 60Hz per monitor.
- HDMI 2.0, HDCP 2.2, and HDR10 support.
- Integrated 2-port USB 3.0 Hub (5Gbps) for sharing peripherals.
- Four USB 2.0 HID ports for keyboard and mouse.
- Hotkey and front-panel push-button switching.
- EDID and HDCP signal emulation for fast, seamless switching.
- Supports stereo analog and 7.1 digital audio.

- OS Independent compatibility (Windows, Mac, Linux).

3.2. Front Panel

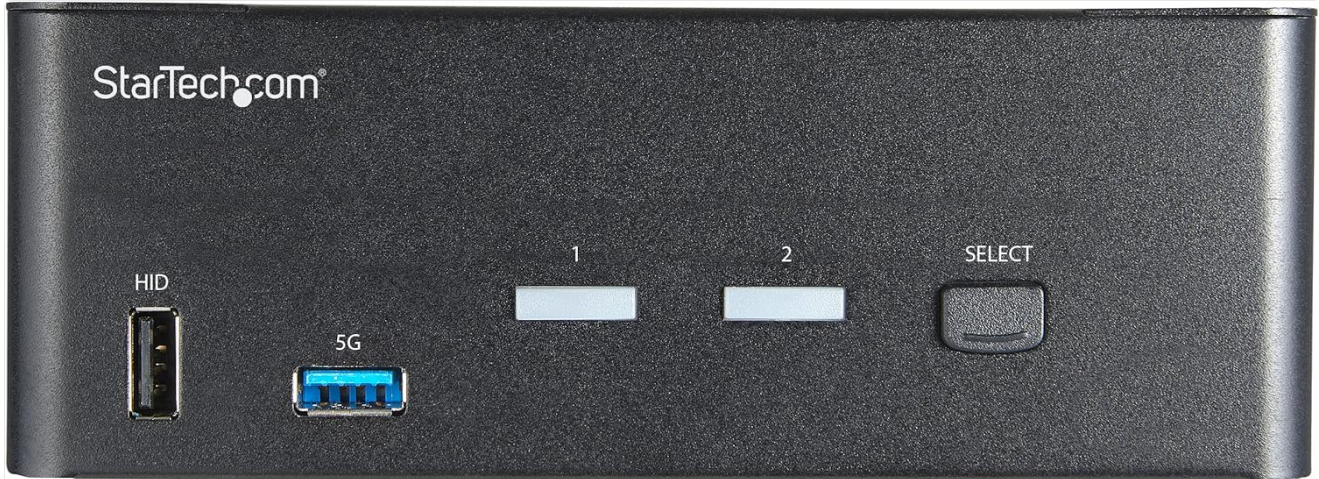


Figure 1: Front Panel Layout

- **HID USB Port:** For connecting a keyboard or mouse.
- **5G USB Port:** For connecting high-speed USB 3.0 devices.
- **Computer Selection Buttons (1, 2):** Press to switch to the corresponding computer.
- **SELECT Button:** Used for various functions, including auto-scan activation.

3.3. Rear Panel

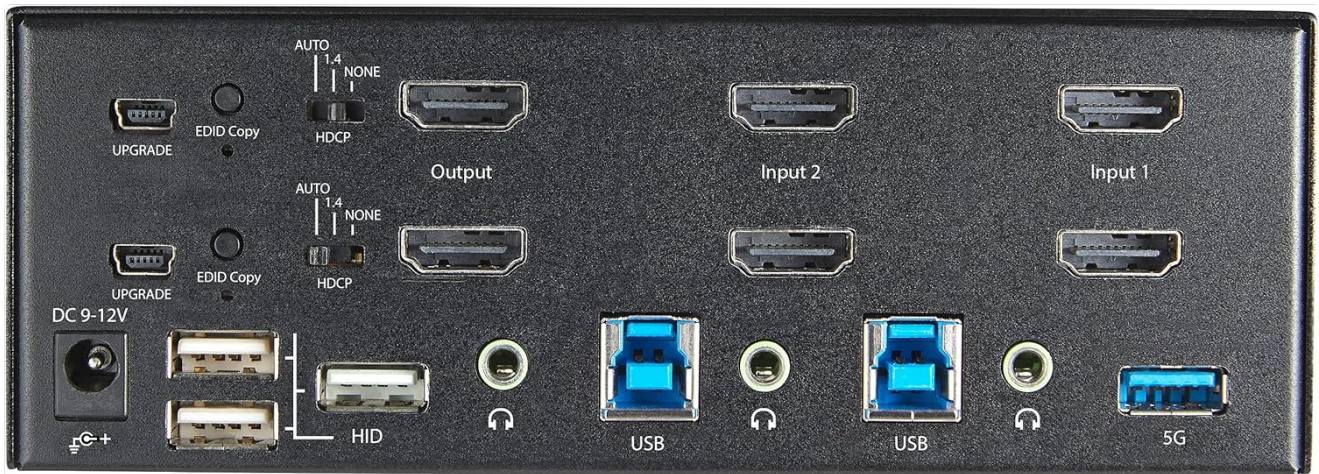


Figure 2: Rear Panel Layout

- **DC 9-12V Power Input:** Connect the included power adapter.
- **UPGRADE Port:** For firmware updates.
- **EDID Copy Button/Switch:** Manages Extended Display Identification Data.
- **HDCP Switch:** Manages High-bandwidth Digital Content Protection.
- **Output (HDMI):** Connect to your monitors.
- **Input 1/Input 2 (HDMI):** Connect to the HDMI outputs of your computers.
- **USB (Type-B):** Connect to the USB 3.0 ports of your computers.
- **HID USB Ports (Type-A):** For additional keyboard/mouse connections or other low-power USB devices.
- **Audio Jacks (3.5mm):** For connecting speakers/headphones and microphones.
- **5G USB Port (Type-A):** For connecting high-speed USB 3.0 devices.

4. SETUP

4.1. What's in the Box

- 1 x KVM Switch (SV231DHU34K6)
- 1 x Universal Power Adapter (NA/JP, EU, UK, ANZ)
- 4 x Rubber Feet
- 1 x Quick-Start Guide

Note: HDMI cables, USB 3.0 Type-A to Type-B cables, and audio cables are not included and must be purchased separately.

4.2. Connection Instructions

Follow these steps to connect your KVM switch:

1. **Connect Monitors:** Connect your two HDMI monitors to the 'Output' HDMI ports on the rear panel of the KVM switch.
2. **Connect Computers (HDMI):** Connect the HDMI outputs from Computer 1 to the 'Input 1' HDMI ports on the KVM switch. Repeat for Computer 2 and 'Input 2'. Ensure both HDMI outputs from each computer are connected for dual monitor support.
3. **Connect Computers (USB):** Connect the USB 3.0 Type-B ports on the KVM switch to the USB 3.0 Type-A ports on Computer 1 and Computer 2 using appropriate USB 3.0 cables. These connections enable keyboard, mouse, and USB hub functionality.
4. **Connect Peripherals:**
 - Connect your keyboard and mouse to the 'HID' USB ports on the front or rear panel.
 - Connect other USB devices (e.g., printer, scanner, webcam) to the '5G' USB 3.0 ports on the front or rear panel.
5. **Connect Audio (Optional):** If desired, connect your speakers/headphones and microphone to the 3.5mm audio jacks on the rear panel.
6. **Connect Power:** Connect the included universal power adapter to the 'DC 9-12V' power input on the rear panel, then plug it into a power outlet. The KVM switch will power on automatically.



Figure 3: KVM Switch with Ports for Connection

5. OPERATING THE KVM SWITCH

5.1. Switching Between Computers

You can switch between connected computers using either the front-panel push buttons or hotkey commands.

- **Front-Panel Buttons:** Press the '1' or '2' button on the front panel to directly switch to Computer 1 or Computer 2, respectively.
- **Hotkey Switching:** Use keyboard hotkey combinations to switch computers. The default hotkey sequence is typically **Scroll Lock, Scroll Lock, [1 or 2]**. Refer to the Quick-Start Guide for a complete list of hotkey commands and customization options. A buzzer sound confirms the switch.

5.2. EDID and HDCP Emulation

The KVM switch includes EDID (Extended Display Identification Data) and HDCP (High-bandwidth Digital Content Protection) signal emulation. This feature ensures that your monitors remain synced and desktop settings are maintained when switching between computers, preventing display resolution changes or window rearrangement.

5.3. USB Hub Functionality

The integrated USB 3.0 hub allows you to share two USB 3.0 peripherals (connected to the 5G ports) and four USB 2.0 HID peripherals (connected to the HID ports) between the connected computers. Devices connected to these ports will function as if directly connected to the currently selected host computer.

5.4. Audio Support

The KVM switch supports both digital audio (via HDMI, 7.1 Channel Audio) and separate 3.5mm stereo analog audio (2 Channel Audio). Ensure your displays and sources support the desired audio format for full compatibility.

6. MAINTENANCE

To ensure the longevity and optimal performance of your KVM switch, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the device. Do not use liquid or aerosol cleaners.
- **Ventilation:** Ensure the KVM switch is placed in a well-ventilated area. Do not block any ventilation openings.
- **Cable Management:** Keep cables organized and untangled to prevent damage and ensure proper airflow. Avoid excessive bending or crimping of cables.
- **Storage:** When not in use for extended periods, store the device in a cool, dry place away from direct sunlight and extreme temperatures.

7. TROUBLESHOOTING

If you encounter issues with your KVM switch, refer to the following common problems and solutions:

- **No Display or Incorrect Resolution:**
 - Ensure all HDMI cables are securely connected to both the KVM switch and your computers/monitors.
 - Verify that your HDMI cables are rated for 4K 60Hz if you are using 4K displays. Longer cables (e.g., over 3m/10ft) may require higher quality or active cables.
 - Check the display settings on your computers to ensure they are configured for the correct resolution and refresh rate.
 - Try power cycling the KVM switch and monitors.
- **Keyboard/Mouse Not Responding:**
 - Ensure the USB Type-B cables are securely connected from the KVM switch to your computers.
 - Verify that your keyboard and mouse are connected to the designated HID USB ports.
 - Try connecting the keyboard/mouse directly to the computer to confirm they are functional.
 - Some specialized keyboards/mice with advanced features may require direct connection or specific drivers.
- **USB Devices Not Detected:**
 - Ensure the USB Type-B cables are connected from the KVM switch to your computers.
 - Verify that the USB device is connected to the appropriate 5G USB 3.0 port.
 - Some high-power USB devices may require an external power source or a powered USB hub connected to the KVM's 5G port.
- **Audio Issues:**
 - Check all 3.5mm audio cable connections.
 - Verify audio output settings on your computers.
 - Ensure your monitors or audio devices support the HDMI audio format being sent.
- **Slow Switching Time:**
 - The KVM switch is designed for fast switching. If experiencing delays, ensure EDID and HDCP emulation are functioning correctly.
 - Ensure all cables are of good quality and properly seated.

If the problem persists after attempting these solutions, please contact [StarTech.com](https://www.startech.com) technical support.

8. SPECIFICATIONS

Category	Specification
----------	---------------

Category	Specification
Model Number	SV231DHU34K6
KVM Ports	2
Monitors Supported	2
Video Type	HDMI 2.0
Supported Resolutions	Up to 3840 x 2160 @ 60Hz
HDCP Support	HDCP 2.2
HDR Support	HDR10
USB Hub	2-Port USB 3.0 (5Gbps)
USB HID Ports	4x USB 2.0
Audio Support	HDMI (7.1 Channel), Analog Stereo (3.5mm)
Port Selection	Push Button, Hotkeys
Material	Steel
Color	Black
Product Dimensions (L x W x H)	6.3 x 3.9 x 2.3 inches (16.0 x 10.0 x 5.8 cm)
Product Weight	1.8 lb (0.8 kg)
Power Source	AC Adapter (Included)
Input Voltage	100 - 240 AC
Power Consumption	36W
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-10°C to 60°C (14°F to 140°F)
Humidity	0% to 80% RH (non-condensing)

9. WARRANTY AND SUPPORT


This StarTech.com KVM Switch (Model: SV231DHU34K6) is backed by a **2-year warranty**. StarTech.com also provides **free lifetime technical support**. For technical assistance or warranty claims, please visit the official StarTech.com website or contact their customer support team.

For more information, visit: www.startech.com



[\[pdf\]](#) User Manual Instructions Guide

2 Port Dual Monitor HDMI KVM Switch 4K60 Switches Germany SV231HU34K6 SV231DHU34K6 Manual sgcdn startech 005329 media sets SV231XHU34K6 |||
 2-Port USB 3.0 KVM Switch - HDMI - 4K 60Hz 2-Port USB 3.0 KVM Switch - Dual HDMI - 4K 60Hz SV231HU34K6 **SV231DHU34K6** *actual product may vary from photos *SV231HU34K6 shown above DE: Bedienungsanleitung - de.startech.com FR: Guide de l'utilisateur - fr.startech.com ES: Guía del usuario - es.startech.c... lang:en score:32 filesize: 966.03 K page_count: 10 document date: 2022-07-29

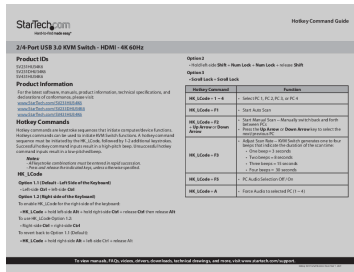

[\[pdf\]](#) Specifications Guide Declaration of Conformity

SV231HU34K6 SV231DHU34K6 SV431HU34K6 Hotkeys sgcdn startech 005329 media sets |||
 Hotkey Command Guide 2/4-Port USB 3.0 KVM Switch - HDMI - 4K 60Hz Product IDs SV231HU34K6 **SV231DHU34K6** SV431HU34K6 Product Information For the latest software, manuals, product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/SV231HU34K6 www.Sta... lang:en score:25 filesize: 78.36 K page_count: 1 document date: 2021-12-01



[\[pdf\]](#)

sv231dhu34k6 coo media startech cms s |||
 Certificate of Country of Origin October 27, 2021 To whom it may concern, This letter hereby certifi ... Switch with 2 Port USB 3.0 Hub 5Gbps 4x USB 2.0 HID, Audio - Hotkey Switching - TAA Product ID: **SV231DHU34K6** Country of Origin: Taiwan Please feel free to contact us if you have any further questi... lang:it score:25 filesize: 36.51 K page_count: 1 document date: 0000-00-00




[pdf]

sv231dhu34k6 weee media startech cms s |||

Waste Electrical and Electronic Equipment Directive WEEE October 27, 2021 To whom it may concern, StarTech.com declares that the product is compliant with the Waste Electrical and Electronic Equipment Directive WEEE European Directive 2012/19/EU. Product Number: **SV231DHU34K6** 2 Port Dual Monitor...

lang:en score:25 filesize: 36.9 K page_count: 1 document date: 0000-00-00

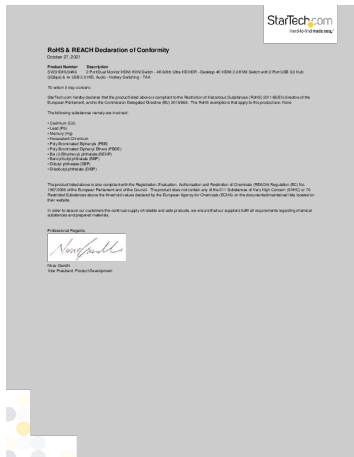


[pdf] Decleration of Conformity

sv231dhu34k6 rohs media startech cms s |||

RoHS REACH Declaration of Conformity October 27, 2021 Product Number Description **SV231DHU34K6** 2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Switch with 2 Port USB 3.0 Hub 5Gbps 4x USB 2.0 HID, Audio - Hotkey Switching - TAA To whom it may concern, StarTec...

lang:en score:25 filesize: 37.17 K page_count: 1 document date: 0000-00-00

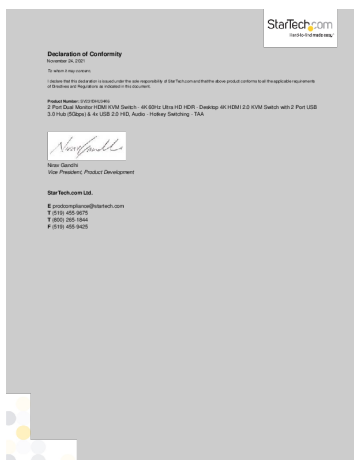

[pdf] Decleration of Conformity

sv231dhu34k6 doc media startech cms s |||

Declaration of Conformity November 24, 2021 To whom it may concern, I declare that this declaration ... pplicable requirements of Directives and Regulations as indicated in this document. Product Number: **SV231DHU34K6** 2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Sw...

lang:en score:24 filesize: 40.02 K page_count: 2 document date: 0000-00-00




[pdf] Datasheet

sv231dhu34k6 datasheet media startech cms s |||

2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Switch with 2 Port USB 3.0 Hub 5Gbps 4x USB 2.0 HID, Audio - Hotkey Switching - TAA Product ID: **SV231DHU34K6** This 2-port KVM switch combines 4K 60Hz digital display capabilities with control of two connected c...


lang:en score:24 filesize: 56.13 K page_count: 5 document date: 0000-00-00

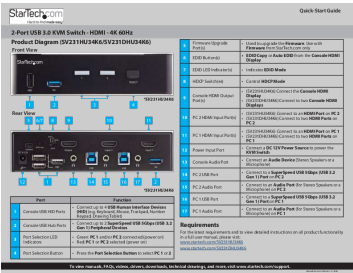

StarTech.com 2-Port USB 3.0 KVM Switch - HDMI - 4K 60Hz Quick-Start Guide

This guide provides instructions for setting up and using the StarTech.com 2-Port USB 3.0 KVM Switch with HDMI and 4K 60Hz support. It covers product overview, connection diagrams, requirements, and operation.

lang:en score:22 filesize: 555.42 K page_count: 2 document date: 2020-10-15

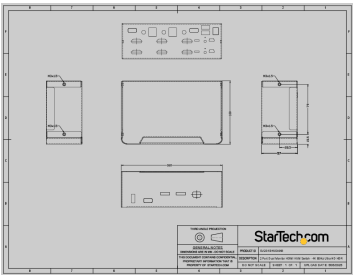

[pdf] Diagram

SV231DHU34K6 Diagram StarTech 2 Port Dual Monitor HDMI KVM Switch 4K 60Hz Ultra HD HDR

Desktop 0 with P sgcdn startech 005329 media sets |||

8 7 6 5 4 3 2 1 F F E E D D C C B B A GENERAL NOTES A **SV231DHU34K6** 2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR DO NOT SCALE SHEET: 1 OF: 1 UPLOAD DATE: 5/05/2025 8 7 6 5 4 3 2 1 ...

lang:en score:22 filesize: 282.96 K page_count: 1 document date: 2025-05-05



[pdf]

Startech SV231DHU34K6 KVM Switch HDMI a 2 porte e doppio monitor 4K60Hz Ultra HD HDR per computer desktop con 2x USB 3 0 Hub 5Gbps 4x HID Audio Tasti di scelta rapida Melchioni Electronics startech sv231dhu34k6 811000793 melchioni ready media assets files reference |||

KVM Switch HDMI a 2 porte e doppio monitor 4K 60Hz Ultra HD HDR - Switch KVM per computer desktop HDMI 2.0 con 2 porte USB 3.0 Hub 5Gbps e 4x USB 2.0 HID, Audio - Commutazione con tasti di scelta rapida - TAA ID prodotto: **SV231DHU34K6** Questo switch KVM a 2 porte consente di sfruttare le funzionali...

lang:it score:20 filesize: 227.89 K page_count: 5 document date: 0000-00-00



KVM Switch HDMI a 2 porte e doppio monitor 4K 60Hz Ultra HD HDR - Switch KVM per computer desktop HDMI 2.0 con 2 porte USB 3.0 Hub 5Gbps e 4x USB 2.0 HID, Audio - Commutazione con tasti di scelta rapida - TAA ID prodotto: **SV231DHU34K6** Questo switch KVM a 2 porte consente di sfruttare le funzionali...

lang:it score:19 filesize: 232.35 K page_count: 5 document date: 0000-00-00



Consulter les données fournies par le fabricant StarTech Commutateur KVM HDMI 2 0 Ports Écrans
SV231DHU34K6 Open iT Informatique et Haute technologie mmo 92042727 1654681875 6209 25017
objects icecat biz |||

Commutateur KVM HDMI 2.0, 2 Ports, 2 crans - 4K 60Hz Ultra HDR - Commutateur KVM de Bureau 4K HDMI 2.0 avec Hub USB 3.0 2 Ports 5Gbps 4x USB 2.0 HID, Audio - Commutation par Touches - TAA N de produit: **SV231DHU34K6** Ce commutateur KVM 2 ports associe des fonctionnalits d affichage numrique 4K 60... lang:fr score:18 filesize: 225.94 K page count: 5 document date: 0000-00-00



startech com sv231hu34k6 trovaprezzi it manuali ||

Questo manuale d'istruzione fornito da trovaprezzi.it. Scopri tutte le offerte per StarTech.com SV231HU34K6 o cerca il tuo prodotto tra le migliori offerte di Switch Quick-Start Guide 2-Port USB 3.0 KVM Switch - HDMI - 4K 60Hz Product Diagram SV231HU34K6/**SV231DHU34K6** Front View 5 Firmware Upg...

lang:en score:18 filesize: 591.93 K page_count: 2 document date: 2020-10-15

StarTech.com

tecnología informática

El Hub Conmutador KVM de 2 Puertos HDMI 2.0 4K para 2 Monitores - Vídeo de 4K y 60Hz Ultra HD - HDR - Hub Ladrn USB 3.0 de 2 Puertos y 4 Puertos USB 2.0 HID Audio - HotKey - TAA

ID del Producto: **SV231DHU34K6**



Este conmutador KVM de 2 puertos combina la capacidad de visualización digital 4K (60Hz) con control de hasta dos ordenadores conectados.

El conmutador KVM HDMI es compatible con resoluciones máximas de 4K a 60Hz. Admite dos monitores grandes a la vez en el total. Incluye la función de empuje de vídeo HDCP y CEC, de manera que los monitores siempre están sincronizados para más calidad al controlarlo, además, se muestran los parámetros de configuración del monitor, el video y el audio en el menú de trabajo.

Compatible con audio digital (con pantalla y fuentes compatibles) y audio estándar 3.5mm independiente. El conmutador KVM HDMI 2.0 ofrece compatibilidad total con audio.

El conmutador USB 3.0 integrado le permite compartir dos periféricos adicionales (cadenas del teclado y el ratón) entre los ordenadores conectados, como si estuvieran conectados directamente a su ordenador anfitrión, lo cual evita los gastos de adquirir dispositivos por duplicado, como impresoras o escáneres.

Además de su compatibilidad con Windows, este conmutador KVM HDMI también es compatible con los sistemas operativos Mac y Linux.

Los botones del panel frontal facilitan cambiar entre sistemas y activar la función de autoencendido. La funcionalidad de autoencendido de StarTech® reduce el ruido, ahorra el espacio y evita conflictos de conexión.

StarTech ofrece una amplia selección de conmutadores KVM de alta calidad y demás productos relacionados con KVM, que le permiten acceder a sus sistemas de manera más eficiente, con gastos extra o ningún de instalación, cables y monitores adicionales.

StarTech.com

tecnología informática

[pdf] Datasheet

Switch Conmutador KVM de 2 Puertos HDMI 0 4K para Monitores El conmutador es compatible con resoluciones máximas a 60Hz Admite dos monitores grandes la resolución total sv231dhu34k6 datasheet media startech cms s |||

Switch Conmutador KVM de 2 Puertos HDMI 2.0 4K para 2 Monitores - Vdeo de 4K y 60Hz Ultra HD - HDR - Hub Ladrn USB 3.0 de 2 Puertos y 4 Puertos USB 2.0 HID Audio - HotKey - TAA ID del Producto: **SV231DHU34K6** Este conmutador KVM de 2 puertos combina la capacidad de visualizacin digital 4K 60Hz con c... lang:es **score:18** filesize: 233.26 K page_count: 6 document date: 0000-00-00

StarTech.com

tecnología informática

2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Switch with 2 Port USB 3.0 Hub (5Gbps & 4x USB 2.0 HID) Audio - Hotkey Switching - TAA

Product ID: **SV231DHU34K6**



This 2 port KVM switch combines 4K 60Hz digital display capabilities with control of two connected computers.

The 4K KVM switch supports resolutions up to 4K at 60Hz. It shows two large monitors at the full 4K resolution. Includes HDCP and CEC support so monitors always remain synced for better watching films, and sharing settings are maintained to avoid disrupting your workflow.

With support for digital audio, with supporting displays and sources and separate 3.5 mm stereo audio, the HDMI 2.0 KVM switch delivers full audio compatibility.

The integrated USB 3.0 hub shares two peripherals (in addition to keyboard and mouse) among attached computers and it can now also be connected to your host computer, eliminating the cost of duplicate devices such as printers and scanners.

While supporting Windows, the HDMI KVM switch is also compatible with Mac and Linux operating systems.

The front panel pushbuttons make it easy to switch between systems and activate the auto-on feature. The hotkey functionality makes accessing each system quick, while a touchbar around the switch.

StarTech also offers a wide selection of high-quality KVM switches and KVM related products to help you access your systems more efficiently without the expense and clutter of extra keyboards, mice, and monitors.

This 2 port HDMI switch is backed by a 3 year warranty and has lifetime technical support.

Certifications, Reports and Compatibility

Applications

StarTech.com

tecnología informática

[pdf] Datasheet

StarTech 2 Port Dual Monitor HDMI KVM Switch 4K 60Hz Ultra HD HDR Desktop 0 with USB 3 Hub 5Gbps 4x HID Audio Hotkey Switching TAA Fast audio switch ports Compliant SV231DHU34K6 howardcomputers 3D63C3C2 1E5A 461B 85C3 65BF805D7D9F media howard CNET Product Data Sheet |||

2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Switch with 2 Port USB 3.0 Hub 5Gbps 4x USB 2.0 HID, Audio - Hotkey Switching - TAA Product ID: **SV231DHU34K6** This 2-port KVM switch combines 4K 60Hz digital display capabilities with control of two connected c... lang:en **score:17** filesize: 55.49 K page_count: 5 document date: 0000-00-00

OFFICE Xpress

DISTRIBUTOR INFORMATION



[pdf]

StarTech Câble HDMI grande vitesse haute OfficeXpress qualité avec Ethernet de 2 m Cordon vers 0 4K 60 Hz HDMM2MP techdoc ref officexpress fr |||

StarTech.com Cble HDMI grande vitesse haute qualitt avec Ethernet de 2 m - Cordon HDMI vers HDMI - Cb ... , MOD4DOCKACPD, MSTCDP123HD, PEXHDCAP4K, ST122HD202, ST124HD202, STNDMTV100, STNDMTV70, STNDMTVDUO, **SV231DHU34K6**, SV231HU34K6, SV431HU34K6, TB32HD24K60, TB3DKM2HDL, USBC-HDMI-CDP2HD4K60, VS221HD20, VS... lang:fr **score:16** filesize: 101.92 K page_count: 2 document date: 2025-08-05



[pdf] Datasheet Catalog

STARTECH 2 PT HDMI KVM SWITCH 747d70ea2cc0a54db94f3e74f4d3b4ad sv231dhu34k6datasheet

inline true t support gr image catalog |||

2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Switch with 2 Port USB 3.0 Hub 5Gbps 4x USB 2.0 HID, Audio - Hotkey Switching - TAA Product ID: **SV231DHU34K6** This 2-port KVM switch combines 4K 60Hz digital display capabilities with control of two connected c...

lang:en score:13 filesize: 85.09 K page_count: 5 document date: 0000-00-00



[pdf] User Manual

Technisches Datenblatt de STARTECH COM KVM Switch Interdiscount

e93a1b29af749db6479fa539e93998806ecba storage googleapis static shops products document |||

2-Port Dual Monitor HDMI KVM-Switch - 4K 60Hz Ultra-HD HDR - Desktop 4K HDMI 2.0 KVM-Switch mit 2-Port USB 3.0 Hub 5 Gbit/s und 4x USB 2.0 HID, Audio Hotkey-Switching - TAA Produkt-ID: **SV231DHU34K6** Dieser KVM-Switch mit zwei Anschlssen kombiniert digitale 4K-Displayfunktionen 60 Hz mit der Steue...

lang:de score:13 filesize: 225.48 K page_count: 5 document date: 0000-00-00



[pdf] Datasheet

Document StarTech 2 Port Dual Monitor 4K 60Hz Ultra HD HDR HDMI KVM Switch fus 816643 datasheet

cdn3 evostore io documents fusion |||

2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Switch with 2 Port USB 3.0 Hub 5Gbps 4x USB 2.0 HID, Audio - Hotkey Switching - TAA Product ID: **SV231DHU34K6** This 2-port KVM switch combines 4K 60Hz digital display capabilities with control of two connected c...

lang:en score:13 filesize: 87.5 K page_count: 5 document date: 0000-00-00



[pdf] Specifications

title subject author Manufacturer Specifications StarTech 2 Port Dual Monitor HDMI KVM Switch 4K 60Hz Ultra HD HDR mmo 92042727 1620739024 3969 3880 assets media quzo co uk 2024 11 12 ||| 2 Port Dual Monitor HDMI KVM Switch - 4K 60Hz Ultra HD HDR - Desktop 4K HDMI 2.0 KVM Switch with 2 Port USB 3.0 Hub 5Gbps 4x USB 2.0 HID, Audio - Hotkey Switching - TAA Product ID: **SV231DHU34K6** This 2-port KVM switch combines 4K 60Hz digital display capabilities with control of two connected c... lang:en **score:12** filesize: 20.5 K page_count: 5 document date: 2024-11-12



[pdf]

Download leaflet StarTech 2 Port Dual Monitor KVM HDMI Switch 4K 60Hz Ultra HD HDR Desktop Hub 0 Schakelaar met 2x USB 3 5Gbps 4x HID Audio Hotkey Switching TAA Computer Connections SKU SV231DHU34K6EAN 0065030881999Downloadbare informatie mmo 92042727 1654692699 6055 300 objects icecat biz ||| 2 Port Dual Monitor KVM HDMI Switch, 4K 60Hz Ultra HD HDR, Desktop Hub 4K HDMI 2.0 KVM Schakelaar met 2x USB 3.0 5Gbps 4x USB 2.0 HID, Audio, Hotkey Switching, TAA Productcode: **SV231DHU34K6** Deze 2-poorts KVM switch combineert 4K 60 Hz digitale weergavemogelijkheden met bediening van twee aange... lang:nl **score:12** filesize: 225.32 K page_count: 5 document date: 0000-00-00



[pdf]

Télécharger StarTech Commutateur KVM HDMI 2 0 Ports Écrans 4K 60Hz Ultra HDR de Bureau avec Hub USB 3 à 5Gbps 4x HID Audio Commutation par Touches TAA SECOMP France 525421849 secomp fr data i2cmsdata xcont 282 1518 ||| Commutateur KVM HDMI 2.0, 2 Ports, 2 crans - 4K 60Hz Ultra HDR - Commutateur KVM de Bureau 4K HDMI 2.0 avec Hub USB 3.0 2 Ports 5Gbps 4x USB 2.0 HID, Audio - Commutation par Touches - TAA N de produit: **SV231DHU34K6** Ce commutateur KVM 2 ports associe des fonctionnalits d affichage numrique 4K 60... lang:fr **score:11** filesize: 197.1 K page_count: 5 document date: 0000-00-00



[pdf]

Ficha técnica StarTech Switch Conmutador KVM de 2 Puertos HDMI 0 4K para Monitores Video y 60Hz Ultra HD HDR Hub Ladrón USB 3 4 HID Audio HotKey TAA Kipmion Tecnología mmo 92042727 1654681665 6825 19277 objects icecat biz ||| Switch Conmutador KVM de 2 Puertos HDMI 2.0 4K para 2 Monitores - Vdeo de 4K y 60Hz Ultra HD - HDR - Hub Ladrn USB 3.0 de 2 Puertos y 4 Puertos USB 2.0 HID Audio - HotKey - TAA ID del Producto: **SV231DHU34K6** Este conmutador KVM de 2 puertos combina la capacidad de visualizacin digital 4K 60Hz con c... lang:es **score:11** filesize: 225.85 K page_count: 5 document date: 0000-00-00

