

Manuals.plus /

› Flujoy /

› Flujoy Replacement Battery Instruction Manual for A1934 / A2013 / A1980 / A1979 Tablets

## Flujoy CS-IPA198SL

# Flujoy Replacement Battery Instruction Manual

Model: CS-IPA198SL

## 1. PRODUCT OVERVIEW

This manual provides essential information for the safe and effective use of your Flujoy replacement battery. This battery is designed to replace the original battery in compatible tablet models, offering a capacity of 7700mAh (29.26Wh) with a 3.8V Li-Polymer cell type.

**Compatible Models:** A1934, 8.3, Pro 11 2018 3rd Gen, A2013, Pro 11, A1980, A1979

**Compatible Part Numbers:** A2042, 020-02507

## 2. SAFETY INFORMATION AND PRECAUTIONS

Please read all safety instructions carefully before installation and use. Failure to follow these instructions may result in fire, injury, or damage to the product or device.

- **CAUTION:** Warranty is void if the battery label is removed.
- Do not attempt to disassemble, open, or service the battery pack.
- Replace only with the battery pack designated for this product.
- Do not crush, puncture, short external contacts, or dispose of in fire or water.
- Do not store above 60°C (140°F).
- New battery packs must be fully charged before use to reduce the risk of fire or burns.
- Dispose of used batteries according to local regulations.

## 3. SETUP AND INSTALLATION

Installing a replacement battery requires technical skill and specialized tools. It is highly recommended that installation be performed by a qualified professional to avoid damage to your device or the battery.

**General Installation Guidelines (Professional Installation Recommended):**

1. **Preparation:** Ensure your device is powered off and disconnected from any power source. Gather necessary tools (e.g., screwdrivers, prying tools, adhesive remover).
2. **Disassembly:** Carefully open your tablet device according to its specific service manual or repair guide. Locate the existing battery.



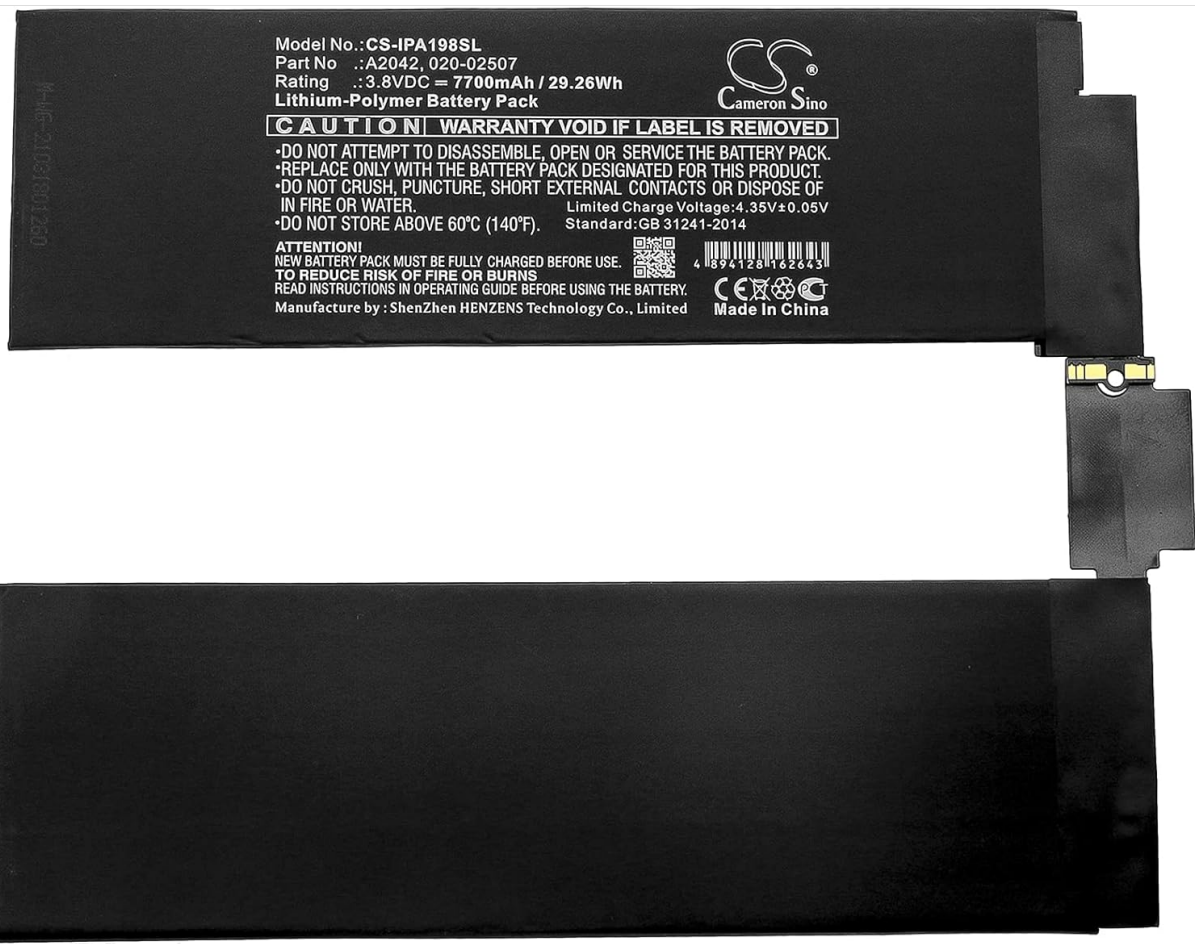


Image 2: Bottom view of the Flujoy replacement battery, displaying the reverse side of the battery with additional label details and warnings.



Image 3: Close-up view of the battery's flex cable and connector, highlighting the contact points for connection to the device's logic board.

## 4. OPERATING INSTRUCTIONS

Once the battery is correctly installed and fully charged, your device will operate as usual. The battery is designed to provide reliable power for your compatible tablet.

- **Initial Use:** For optimal performance, fully charge the battery before its first use.
- **Charging:** Use only the original or certified compatible charger for your tablet. Avoid using damaged or non-compliant chargers.

- **Discharge Cycles:** For best battery longevity, avoid frequently discharging the battery completely. Partial discharge and regular charging are generally recommended.

## 5. MAINTENANCE AND CARE

---

Proper care can extend the life of your replacement battery.

- **Temperature:** Avoid exposing the battery to extreme temperatures (below 0°C or above 35°C) during operation or storage. Do not store above 60°C (140°F).
- **Physical Damage:** Protect the battery from physical impact, crushing, or puncturing.
- **Moisture:** Keep the battery dry and away from liquids.
- **Storage:** If storing the device for an extended period, ensure the battery is charged to approximately 50-70% and store in a cool, dry place.

## 6. TROUBLESHOOTING

---

If you encounter issues with your replacement battery, consider the following:

- **Battery Not Charging:**
  - Ensure the charger and charging cable are functional and properly connected.
  - Verify that the battery connector inside the device is securely attached.
  - Try restarting your device.
- **Rapid Battery Drain:**
  - Check for background applications or processes consuming excessive power.
  - Ensure device software is up to date.
  - Calibrate the battery by fully discharging and then fully charging it (perform this sparingly).
- **Device Not Powering On:**
  - Ensure the battery is charged. Connect the device to a charger for at least 30 minutes.
  - Verify proper battery installation and connection.

If problems persist after attempting these steps, please contact customer support.

## 7. SPECIFICATIONS

---

Feature	Specification
Model Number	CS-IPA198SL
Battery Type	Li-Polymer
Capacity	7700mAh
Watt-Hours (Wh)	29.26Wh
Voltage	3.8V
Dimensions (Battery Pack)	187.5 x 145.35 x 3.15mm (7.38 x 5.72 x 0.12 inches)
Weight	268.0g (9.5 ounces)
Manufacturer	Flujoy

## 8. WARRANTY AND SUPPORT

---

Flujoy offers a commitment to quality for this replacement battery.

- **Warranty:** We provide a full refund or a free replacement without reason for 60 days from the date of purchase.
- **Customer Support:** If you have any questions, concerns, or require assistance with your product, please do not hesitate to contact us. Refer to your purchase documentation for specific contact information.