



[Manuals.plus](#) /

› [AUTELO](#) /

› AUTELO H7010 BK 1-Light Industrial Pendant Light User Manual

AUTELO H7010 BK

AUTELO H7010 BK 1-Light Industrial Pendant Light User Manual

Model: H7010 BK

INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your AUTELO H7010 BK 1-Light Industrial Pendant Light. Please read this manual thoroughly before installation and retain it for future reference.



Image: The AUTELO H7010 BK 1-Light Industrial Pendant Light featuring a clear glass shade and black metal finish.

SAFETY INFORMATION

WARNING: To reduce the risk of fire, electric shock, or personal injury, always follow these safety precautions:

- Always turn off the power at the main circuit breaker or fuse box before beginning installation or performing any maintenance.
- Consult a qualified electrician if you are not familiar with electrical installations.
- Ensure all electrical connections are made in accordance with local codes, ordinances, and the National Electric Code (NEC).
- Use only the specified bulb type and wattage to avoid overheating.
- Do not connect this fixture to an ungrounded electrical system.

- Handle glass components with care to prevent breakage.

SETUP AND INSTALLATION

The AUTELO H7010 BK pendant light is designed for hard-wired installation. All necessary mounting hardware is included for quick and easy setup. Professional installation is recommended if you are unsure about the process.

Components Overview

ONE LAST SPARKLE TO FOLLOW IN MY LIGHT

DETAILS



**Black Metal
Finish**



**Clear Thick
Glass**



SPECIFICATION

Image: Close-up view highlighting the black metal finish and the clear thick glass shade of the pendant light.

Installation Steps

1. **Prepare for Installation:** Turn off power at the circuit breaker. Ensure the mounting surface is secure

and can support the fixture's weight.

2. **Mount the Ceiling Plate:** Attach the ceiling plate to the junction box using the provided screws.
3. **Adjust Hanging Length:** The pendant light features an adjustable cord. The maximum adjustable length is 53 inches, with a total maximum hanging length of 66 inches. Adjust the cord to your desired height before making electrical connections.
4. **Make Electrical Connections:** Connect the fixture's wires to the corresponding household wires (black to black, white to white, ground to ground) using wire connectors. Ensure all connections are secure.
5. **Secure the Fixture:** Carefully tuck the wires into the junction box and secure the fixture canopy to the ceiling plate.
6. **Install the Glass Shade:** Attach the clear glass shade to the fixture body.
7. **Install the Bulb:** Insert one E26 base bulb (not included) into the socket.
8. **Restore Power:** Turn the power back on at the circuit breaker.

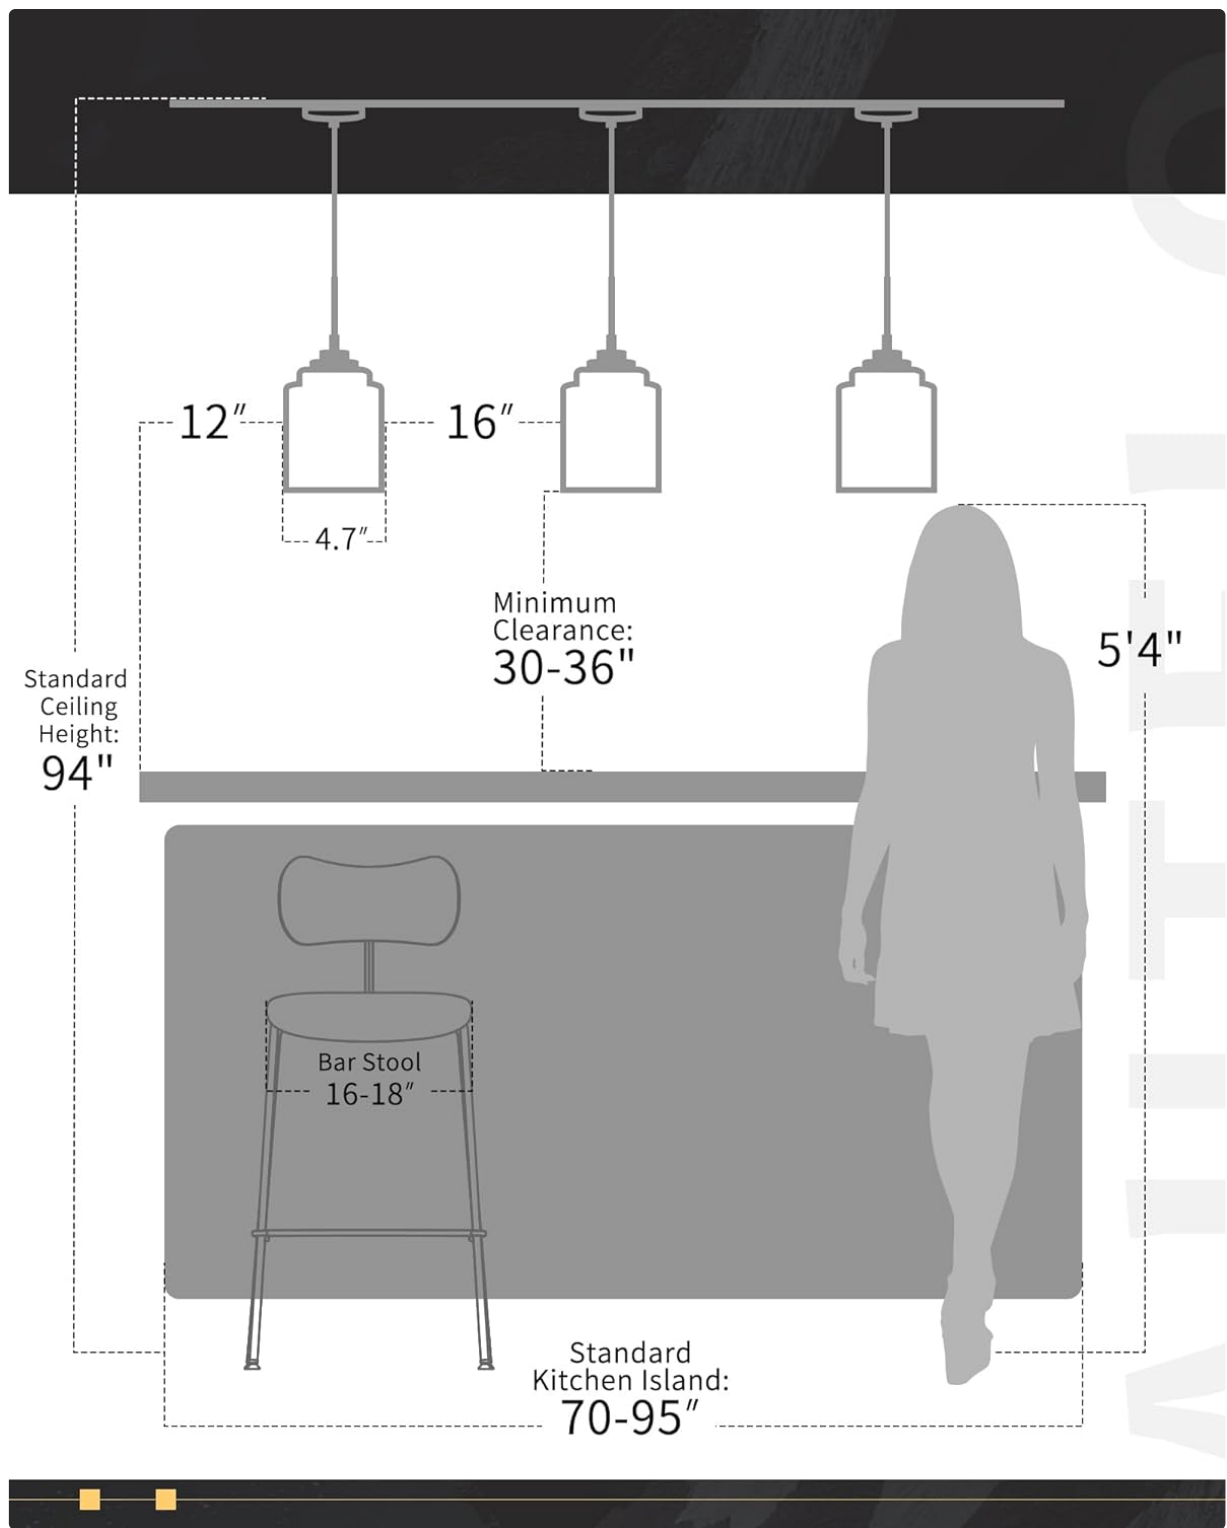


Image: Diagram illustrating recommended clearances and dimensions for pendant light installation over a kitchen island, including standard ceiling height and bar stool height.



Image: Illustration showing the pendant light can be installed on flat, sloped, or vaulted ceilings.

OPERATING INSTRUCTIONS

Once installed, the pendant light operates via your standard wall switch. Ensure the correct bulb is installed for proper function.

Bulb Requirements

- **Bulb Type:** E26 base (standard screw-in)
- **Maximum Wattage:** 60W
- **Compatibility:** Compatible with LED, CFL, and incandescent bulbs.
- **Dimmable Functionality:** The fixture is dimmable when used with a compatible dimmable E26 bulb and an additional dimmable wall switch (bulb and switch are NOT included).



Image: Visual representation of the dimmable capability of the pendant light, showing varying brightness levels from 10% to 100% when paired with a dimmable switch and bulb.

Changing Bulbs

The wide-open shade diameter simplifies bulb replacement. Ensure power is off before changing bulbs. Allow the bulb to cool completely before touching it.

MAINTENANCE

Regular cleaning will help maintain the appearance and performance of your pendant light.

- **Cleaning the Glass Shade:** Turn off power and allow the fixture to cool. Gently wipe the clear glass

shade with a soft, damp cloth. Avoid abrasive cleaners or harsh chemicals that could damage the finish or glass.

- **Cleaning the Metal Finish:** Wipe the black metal finish with a soft, dry cloth. Do not use polishes or cleaners that could scratch or alter the finish.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

TROUBLESHOOTING

If you experience issues with your pendant light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	Power is off at the circuit breaker. Bulb is loose or faulty. Incorrect wiring.	Check the circuit breaker and ensure power is on. Tighten or replace the bulb. Verify wiring connections (consult an electrician if needed).
Light flickers.	Loose bulb. Incompatible dimmer switch or bulb. Loose wiring connection.	Tighten the bulb. Ensure dimmer switch and bulb are compatible and rated for dimming. Check wiring connections (consult an electrician if needed).
Glass shade is loose.	Shade not properly secured.	Ensure the retaining ring or mechanism holding the glass shade is tightened securely.

If the problem persists after attempting these solutions, please contact customer support.

SPECIFICATIONS

Feature	Detail
Brand	AUTELO
Model Number	H7010 BK
Color	Black
Material	Glass, Metal
Style	Industrial
Light Fixture Form	Pendant
Product Dimensions (L x W x H)	12.2" x 8.27" x 7"
Glass Shade Dimensions (W x H)	4.7" x 12.8"
Ceiling Plate Dimensions (Dia x H)	4.7" x 1"

Feature	Detail
Max Adjustable Length	53"
Max Hanging Length	66"
Bulb Base	E26
Max Wattage	60W
Voltage	110-120 Volts
Light Source Type	LED compatible (Bulb not included)
Installation Type	Semi Flush Mount (Pendant)
Indoor/Outdoor Usage	Indoor
Item Weight	2.27 pounds
Certification	UL Listed

#SPECIFICATION



Max 60W



E26 Base



110-120V

#SUGGESTED BULB TYPE

Bulb NOT Included

2.5"



ST64

5.4"

2.3"



ST58

5.3"

4.7"

#AVAILABLE CEILING



Vaulted Ceiling



Flat Ceiling



Sloped Ceiling

11.5"



3"

32oz Sports Water
Bottle Reference

MAX
66"

MAX
53"

12.8"

4.7"

Image: Detailed specifications including dimensions, recommended bulb types (E26, Max 60W), and compatibility with vaulted, flat, and sloped ceilings.

WARRANTY INFORMATION

AUTELO provides a **1-Year Warranty** for this product. If you encounter any quality issues within one year of purchase, please contact our customer support for repair or replacement.



Image: Graphic highlighting AUTELO's safety assurance, 1-year warranty, and professional after-sales service.

CUSTOMER SUPPORT

AUTELO is committed to customer satisfaction. If you have any questions, concerns, or require assistance with your product, please do not hesitate to contact us. We offer comprehensive 24/7 online support. For support, please refer to the contact information provided with your purchase or visit the official AUTELO store on Amazon: [AUTELO Store](#).

PRODUCT VIDEOS

Your browser does not support the video tag.

Video: An overview of the AUTELO Glass Pendant Light (H7010) showcasing its design and different finishes.

Your browser does not support the video tag.

Video: A demonstration of the AUTELO Glass Pendant Light H7010 Set, highlighting its features and application.