

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [BAOFENG](#) /

› [BAOFENG UV-5R Ham Radio User Manual](#)

BAOFENG UV-5R

BAOFENG UV-5R Ham Radio User Manual

Model: UV-5R | Brand: BAOFENG

INTRODUCTION

The BAOFENG UV-5R is a versatile dual-band handheld radio designed for reliable long-range communication. It features VFO and Memory channels, dual display, dual standby, and auto keypad lock, making it suitable for various applications including travel, survival, hiking, cycling, work, camping, fishing, and emergency situations. This manual provides essential information for setting up, operating, maintaining, and troubleshooting your UV-5R radio.



Image: Two BAOFENG UV-5R radios, complete with earpieces and various antenna options, showcasing the full kit.

SETUP

1. Battery Installation and Charging

The UV-5R radio uses an 1800mAh Li-ion battery. Ensure the battery is fully charged before first use.

- To install the battery, align the battery pack with the grooves on the back of the radio and slide it upwards until it clicks into place.
- To charge, place the radio (with battery installed) or the battery alone into the charging cradle. Connect the charger to a standard wall outlet. The charging indicator light will show the charging status.

WITH POWER ADAPTER

Can Charger Radio Or Battery In The Wall



Image: The BAOFENG UV-5R radio positioned in its charging cradle, with the battery shown separately, illustrating the charging process.

2. Antenna Attachment

Screw the provided antenna clockwise onto the antenna connector at the top of the radio until it is finger-tight. Do not overtighten.

VS

**ABBREE AR-771 antenna is a stronger antenna.
It can expand frequency range, perfect signal
stability and greatly increased
communication distance.**

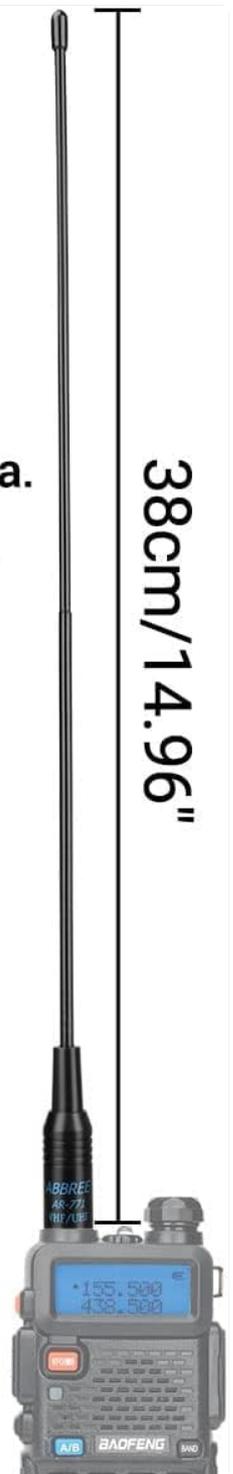


Image: A visual comparison between a standard 17cm antenna and the longer 38cm AR-771 antenna, highlighting the potential for improved signal range.

3. Earpiece Connection

Connect the earpiece into the audio jack on the side of the radio. Ensure it is fully inserted for proper audio output and microphone input.



Image: A close-up of the included earpiece, showing its durable PU cable, 360-degree rotation G-type ear hook, and anti-noise performance features.

OPERATING INSTRUCTIONS

1. Power On/Off and Volume Control

- To power on, rotate the volume knob clockwise. To power off, rotate it counter-clockwise until it clicks.
- Adjust the volume by rotating the same knob.

2. VFO and Memory Channels

- Press the **VFO/MR** button to switch between Frequency Mode (VFO) and Channel Mode (MR).
- In VFO mode, you can manually input frequencies using the keypad.
- In MR mode, you can select pre-programmed channels using the UP/DOWN arrow keys or the keypad.

3. Dual Display / Dual Standby

- The radio features a dual display, showing two frequencies or channels simultaneously.
- Dual standby allows the radio to monitor both displayed frequencies and receive on the first one that becomes active.
- Use the **A/B** button to switch the active frequency/channel between the upper and lower display.

4. Keypad Programming and CHIRP Support

- The UV-5R supports direct frequency programming via the keypad. Refer to the detailed programming guide for specific steps (not included in this manual).
- The radio is compatible with CHIRP software for computer-based programming, offering advanced customization options.

5. Auto Keypad Lock

- The auto keypad lock feature prevents accidental key presses. To enable/disable, press and hold the **#** key.

6. Transmitting

- To transmit, press and hold the Push-To-Talk (PTT) button on the side of the radio. Speak clearly into the microphone.
- Release the PTT button to listen.

Your browser does not support the video tag.

Video: An official demonstration of the BAOFENG UV-5R VHF UHF Dual Band Long Range Ham Radio, showcasing its features and operation.

MAINTENANCE

1. Battery Care

- To maximize battery life, fully charge the battery before initial use.
- Avoid overcharging or completely draining the battery.
- If storing the radio for an extended period, remove the battery and store it in a cool, dry place.

2. Cleaning

- Clean the radio's surface with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners.
- Ensure the charging contacts on both the radio and the charger are clean and free of debris.

3. Storage

- Store the radio in a dry environment, away from extreme temperatures and direct sunlight.
- Protect the antenna and display from physical damage during storage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Radio does not power on.	Battery is low or not installed correctly.	Ensure battery is fully charged and properly seated.

Problem	Possible Cause	Solution
No audio or distorted audio.	Volume too low, earpiece not connected, or frequency issue.	Increase volume, check earpiece connection, verify correct frequency/channel.
Cannot transmit or receive.	Incorrect frequency, antenna loose, or battery low.	Check frequency settings, ensure antenna is tight, charge battery.
Keypad is unresponsive.	Keypad lock is enabled.	Press and hold the # key to unlock the keypad.
Charging issues (e.g., "charging plate came broken").	Damaged charger/cradle or poor contact.	Inspect charger and cradle for damage. Ensure proper contact between battery/radio and charging pins. Contact support if damaged.

SPECIFICATIONS

Feature	Detail
Brand	BAOFENG
Model Number	UV-5R
Item Weight	2.21 pounds
Product Dimensions	2.17 x 1.38 x 3.94 inches
Batteries	2 Lithium Ion batteries required (included)
Number of Channels	128
Special Features	Long Range, Rechargeable, Battery Saver Mode, Dual Band, Emergency Alarm
Frequency Range	UHF VHF
Voltage	7.4 Volts
Water Resistance Level	Not Water Resistant
Country of Origin	China

WHAT'S IN THE BOX

- 2 x Portable radio
- 2 x AR-771 Antenna
- 2 x 1800mAh Li-ion battery
- 2 x Charger
- 2 x Belt clip
- 2 x Sling

- 2 x Earpiece
- 2 x User's manual (this document)

WARRANTY AND SUPPORT

This product does not come with an explicit manufacturer's warranty as per the provided specifications. For any operational issues or technical assistance, please refer to the official user guide or contact the seller directly.


Official User Guide (PDF): [Download Here](#)

Seller: ABBREE ([View Seller Profile](#))

© 2025 BAOFENG. All rights reserved.

Related Documents - UV-5R

	<p>BaoFeng BF-UV5R Programming Guide</p> <p>A comprehensive guide to programming the BaoFeng BF-UV5R dual-band amateur radio using both the manufacturer's software and CHIRP. Covers system requirements, cable setup, software installation, and detailed parameter explanations for radio customization.</p>
	<p>Manual de Instrucciones Baofeng UV-5R</p> <p>Comprehensive instruction manual for the Baofeng UV-5R portable dual-band transceiver, covering features, installation of accessories and battery, charging, basic and advanced operations, menu settings, and detailed technical specifications. Optimize your radio's performance with this guide.</p>
	<p>BAOFENG UV-5R VHF/UHF FM Transceiver User Manual</p> <p>Comprehensive user manual for the BAOFENG UV-5R VHF/UHF FM Transceiver, covering operation, features, battery care, troubleshooting, and programming. Learn how to use this dual-band, dual-watch amateur radio with CTCSS/DCS, VOX, and DTMF functions.</p>

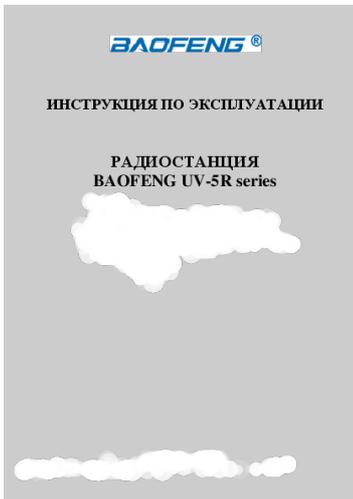

[BAOFENG UV-5R Series Two-Way Radio User Manual](#)

Comprehensive user manual for the BAOFENG UV-5R series two-way radio, covering safety, features, assembly, battery charging, controls, LCD display, operating modes, built-in functions, menu settings, technical specifications, and troubleshooting. Optimize your radio's performance with this detailed guide.


lang:i-klingson score:49 filesize: 1012.48 K page_count: 21 document date: 2015-11-02



[Baofeng UV-5R Dual Band FM Transceiver User Manual](#)

This user manual provides comprehensive instructions for operating the Baofeng UV-5R dual-band FM transceiver, covering safety, features, setup, operation, menu settings, technical specifications, and troubleshooting.


lang:i-klingson score:47 filesize: 1.01 M page_count: 23 document date: 2017-06-14

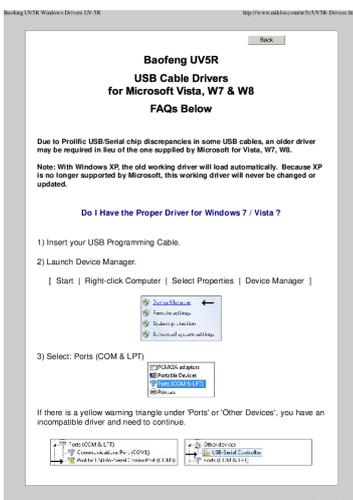

[Baofeng UV5R USB Cable Driver Installation Guide for Windows Vista, 7, and 8](#)

Comprehensive guide for installing and troubleshooting USB cable drivers for Baofeng UV5R radios on Microsoft Windows Vista, 7, and 8, addressing common Prolific chip issues and driver installation steps.

lang:en score:45 filesize: 499.1 K page_count: 6 document date: 2012-08-25

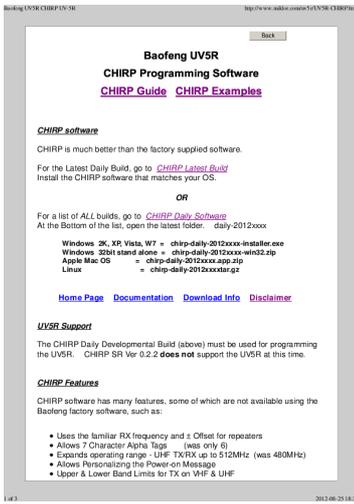

[Baofeng UV5R CHIRP Programming Software Guide and Features](#)

Learn about CHIRP programming software for the Baofeng UV5R radio, including features, installation instructions for various operating systems, and frequently asked questions. Discover how CHIRP enhances radio programming beyond factory software.

lang:en score:45 filesize: 39.2 K page_count: 3 document date: 2012-08-25



[Baofeng UV-5R User Manual](#)

Comprehensive user manual for the Baofeng UV-5R dual-band handheld radio, covering safety guidelines, key features, assembly, battery charging, detailed control descriptions, LCD display icons, and advanced menu functions for optimal operation.

lang:tl score:45 filesize: 771.42 K page_count: 11 document date: 2020-12-21



[BAOFENG UV-5R User Manual](#)

Comprehensive user manual for the BAOFENG UV-5R two-way radio, covering safety, features, installation, battery management, operation, advanced functions, technical specifications, troubleshooting, and warranty information. Optimize your UV-5R experience with this detailed guide.

lang:i-klngon score:45 filesize: 1.06 M page_count: 34 document date: 2024-02-04

Baofeng UV-5R

The (Chinese) Radio Documentation Project

<http://radiodoc.github.com/>

Lennart Lidberg

[Baofeng UV-5R Radio Documentation Project Manual](#)

Comprehensive documentation and user manual for the Baofeng UV-5R two-way radio, covering setup, operation, programming, and troubleshooting. Learn how to use your Baofeng UV-5R transceiver effectively.

lang:en score:45 filesize: 865.6 K page_count: 66 document date: 2012-11-09

[Baofeng UV5R Programming Menu Guide](#)

This document provides a comprehensive programming menu for the Baofeng UV5R two-way radio, detailing settings for squelch, frequency steps, transmit power, battery save, voice operation, display illumination, dual watch, keypad beep, transmit timer, digital and continuous tone coded squelch, voice prompt, automatic number ID, DTMF tones, scan resume, PTT ID, channel display modes, busy channel lockout, automatic keypad lock, frequency shift, memory management, LED illumination colors, alarm modes, band selection, squelch tail elimination, repeater settings, boot message, transmission tone, and reset options. It serves as a quick reference guide for configuring the UV5R's functions.

lang:en score:44 filesize: 45.61 K page_count: 2 document date: 2012-08-25

USER'S MANUAL

UHF and VHF Two Way Radio

ATTENTION! This manual includes basic product description and instruction of basic functions. For more functions and operation guidance on:

<https://baofengtwoway.com/>

[Baofeng UHF VHF Two Way Radio User Manual](#)

Comprehensive user manual for Baofeng UHF and VHF two-way radios, covering setup, operation, battery care, safety guidelines, FCC compliance, and advanced features for amateur radio enthusiasts.

lang:en score:44 filesize: 737.65 K page_count: 52 document date: 2022-04-18

ІНСТРУКЦІЯ З КОРИСТУВАННЯ РАДІОСТАНЦІЇ БАОФЕНГ (POFUNG) UV-5R ТА ЇЇ АНАЛОГІВ

УВАГА! Вербовий зразок за собою повинен мати зліпковий взірчий стріч та користувачеві пристрою без вивески змін в дану інструкцію. На деяких пристроях можливі відмінності в меню радіостанції, та інші параметри. Це пов'язано з різними версіями прошивки у вербівних взірчих стріч. Версія прошивки можна дізнатися використовувати утримуючи клавішу «3» на цифровій клавіатурі, однакова у всіх версіях радіостанції. Зверніть увагу! З'явившись запитання до моделі SR можуть не відіти на моделі SRA, SRE, SRD і тому подібні. Для них вивескувати відповідні запитання. Несумісність стрічівиха дивитися відповідність у коментарі.

Для радіостанції UV-5R чудово зарекомендували себе антени Naraya NA-771 — аналог Diamond RH-771. Вони дають покращення з'являю до 20-30%, і на відміну від інших, є у більшості країн і доступні в Україні.

Ця інструкція відноситься до наступних моделей радіо: SR-V2A, SRV, SRV-F1, SR2, SRA, SRA+, SRAx+, SRAx, SRB, SRC, SRCx+, SRDx, SRD, SRE, SRE Plus, SRQ, SRK, SRQ, SRC, SRT, SRU і також UV-5S, UV-5S+, UV-ES, MK2, GT-3, GT3 MK2, BF-F8, BF-F8-F3, BF-E500, F-11, 997-5, ZT-V8, ZT-V8A, ZT-V8B — Zавантажити (RT-SR, RT-SRV — Ретельно) Таїтс UV-9S, Келлінг TK-F8, Kenwood TH-F8, TYT TH-F8 та деякі інші.

Документ що придбали то вар у нас в магазині shop.dentec.org.ua

[Baofeng UV-5R Series Two-Way Radio User Manual](#)

Comprehensive user manual for Baofeng (Pofung) UV-5R series two-way radios and compatible models. Covers safety, features, unpacking, assembly, battery charging, controls, LCD display, menu settings, technical specifications, and troubleshooting. Includes details on antenna installation, battery usage, and advanced functions like VOX, Squelch, and DTMF tones.

lang:i-klngon score:43 filesize: 1.49 M page_count: 17 document date: 2015-08-31



[BAOFENG UV-5R Two-Way Radio User Manual](#)

Comprehensive user manual for the BAOFENG UV-5R two-way radio, covering product features, safety guidelines, operation instructions, technical specifications, and maintenance procedures for optimal performance and longevity.

lang:pl score:43 filesize: 1.61 M page_count: 27 document date: 2023-12-15



[Baofeng UV-5R Repeater Programming Guide](#)

Learn how to program a 146.985 MHz repeater with minus offset, 100 Hz tone, and low power level into Channel 010 on your Baofeng UV-5R radio. This guide covers setting receive and transmit frequencies, bandwidth, and tone.

lang:en score:42 filesize: 56.31 K page_count: 1 document date: 2015-12-12



[BAOFENG UV-5R FM Dual-Band Transceiver User's Manual](#)

Comprehensive user manual for the BAOFENG UV-5R FM Dual-Band Transceiver, covering installation, operation, safety guidelines, advanced features, troubleshooting, and technical specifications for this portable two-way radio.

lang:en score:42 filesize: 1.66 M page_count: 12 document date: 2019-07-23



[Baofeng UV-5R Radio Documentation Project](#)

Comprehensive documentation and user guide for the Baofeng UV-5R two-way radio, covering initial setup, basic operation, advanced features, programming, troubleshooting, and technical specifications. This project aims to provide detailed information for users of the Baofeng UV-5R transceiver.

lang:en score:42 filesize: 1.23 M page_count: 74 document date: 2014-12-05

MANUAL DE INSTRUCCIONES
EN ESPAÑOL



BAOFENG UV-5R

JAM BY ALONG | alomoy@gmail.com

[Manual de Instrucciones Baofeng UV-5R](#)

Comprehensive instruction manual for the Baofeng UV-5R portable dual-band transceiver, covering features, installation of accessories and battery, charging, basic and advanced operations, menu settings, and detailed technical specifications. Optimize your radio's performance with this guide.

lang:es score:42 filesize: 189.59 K page_count: 19 document date: 2012-07-16

Baofeng UV-5R

The (Chinese) Radio Documentation Project

<http://radiodoc.github.com/>

xiao McFuzzypants

[Baofeng UV-5R Dual-Band Handheld Transceiver User Manual and Features Guide](#)

Comprehensive user manual for the Baofeng UV-5R dual-band handheld transceiver, covering safety, unboxing, assembly, battery maintenance, basic operation, and detailed menu definitions for optimal use.

lang:en score:42 filesize: 119.03 K page_count: 25 document date: 2012-09-04

Baofeng UV-5R

To program repeater 146.985, minus offset, 100 Hz tone, low power level, into Channel010

Turn on radio.
If in Memory Mode switch to VFO Mode (VFO/MR)
Select 5 KHz Step - (MENU) + 1 = MENU] (Use the ▲ ▼ key for SK) (MENU) = EXIT]
Enter 146.985 The receive frequency
Press [MENU] + 2 = [MENU] Use the ▲ ▼ key to select Low Power
Press [MENU] + [EXIT] To accept and exit.
Press [MENU] + 5 = [MENU] Use the ▲ ▼ key to select Wide Bandwidth
Press [MENU] = [EXIT] To accept and exit.
Press [MENU] + 1 = 3 = [MENU] Use the ▲ ▼ key to select 100 Hz Tone
Press [MENU] = [EXIT] To accept and exit.
Press [MENU] + 2 = 7 = [MENU] Enter 010 or Use the ▲ ▼ key to select 010
Press [MENU] = [EXIT] This stores the Receive frequency.
Radio prompts that REC FREQ has been stored
Enter 146.385 The transmit frequency
Press [MENU] + 2 + 7 = Radio prompts that TX FREQ has been stored
[MENU] + [MENU] + [EXIT]

Return to Memory Mode (VFO/MR)

[Baofeng UV-5R Repeater Programming Guide](#)

Detailed instructions for programming the Baofeng UV-5R radio, including setting repeater frequencies, offsets, tones, and power levels for channel 010.

lang:en score:41 filesize: 32.62 K page_count: 1 document date: 2019-07-24



Ear-hook headphones bring you a sanitary and comfortable experience!

Headset	Model	Pin	Features	Compatible with radio series	
				Series	Others
	R2011	2 Pin	Ear Hook	RT11	BAOFENG
				RT11	UV-5R
				UV-5R	UV-5R
	R2011	2 Pin	D-Shape Earhook	RT11	BAOFENG
				RT11	UV-5R
				UV-5R	UV-5R
	R2011	2 Pin	C-Shape Earhook	RT11	BAOFENG
				RT11	UV-5R
				UV-5R	UV-5R

[Retevis Two Way Radio Headsets: Earpiece Compatibility Guide](#)

Explore Retevis two-way radio headsets and their compatibility with various walkie-talkie models. This guide details earpiece types like ear hook, D-shape, and C-shape, compatible with Retevis, Baofeng, and other brands, featuring Kenwood 2-pin connectors.

lang:de score:39 filesize: 151.65 K page_count: 1 document date: 2021-07-13

Baofeng UV-5R
To program repeater 146.985, minus offset, 100 Hz tone, low power level, into Channel 010

Turn on radio.
If in Memory Mode switch to VFO Mode (VFO/MR)
Select 5 KHz Step (MENU) + 1 + MENU (Use the ▲▼ key for 5K) (MENU) + EXIT

Enter
Press (MENU) + 2 + (MENU) 146.985
Press (MENU) + [EXIT] This receive frequency
Use the ▲▼ key to select Low Power
Press (MENU) + 5 + (MENU) To accept and exit
Use the ▲▼ key to select Wide Bandwidth
Press (MENU) + [EXIT] To accept and exit
Press (MENU) + 1 + 3 + (MENU) Tone 0 Hz or 100 Hz
Press (MENU) + 1 + 3 + (MENU) To accept and exit
Press (MENU) + 2 + 7 + (MENU) This stores the Receive Frequency
Radio prompts that REC FREQ has been stored
Press (MENU) + [EXIT] The transmit frequency

Enter
Press (MENU) + 2 + 7 + (MENU) + (MENU) + #NEXT
Radio prompts that TX FREQ has been stored

Return to Memory Mode (VFO/MR)

[Baofeng UV-5R Repeater Programming Guide](#)

Learn how to program a 146.985 MHz repeater with minus offset, 100 Hz tone, and low power level into Channel 010 on your Baofeng UV-5R radio. This guide covers setting receive and transmit frequencies, bandwidth, and tone.

lang:en score:39 filesize: 52.7 K page_count: 1 document date: 2012-03-15

Battery Eliminator Car Charger for BAOFENG UV-5R Series
User Manual

Product key features:

- Baofeng Battery Eliminator Car charger for Baofeng UV-5R Series Walkie Talkie, used on car, bus, truck, taxi, etc.
- Supply power to BAOFENG UV-5R directly from car with this battery eliminator.
- Switching IC Design as BAOFENG UV-5R radio battery back.
- 1000 mAh large capacity, low heat dissipation.
- For Baofeng UV-5R UV-5RA UV-5RA+ UV-5RB UV-5RC UV-5RD UV-5RE UV-5RF UV-5R PLUS.

Product description:

Specifications:
Maximum Output Current: 3.0A
Input Voltage: DC 12V
Output Voltage: 6VDC
Low Heat Dissipation
Over Current Protection
Over temperature Protection

Compatible Products:
BAOFENG UV-5R UV-5RA UV-5RA+ UV-5RB UV-5RC UV-5RD UV-5RE UV-5RF UV-5R PLUS Radios

Note: This unit is a Baofeng battery eliminator not a battery.

File Name: UV-5R
► Battery Eliminator for Baofeng UV-5R series radio

[BAOFENG UV-5R Series Battery Eliminator Car Charger User Manual](#)

User manual for the BAOFENG UV-5R series battery eliminator car charger, detailing its features, specifications, compatible radio models, and package contents. Provides direct power from a vehicle to your UV-5R series walkie-talkie.

lang:en score:39 filesize: 51.63 K page_count: 1 document date: 2020-06-04



Ear-hook headphones bring you a sanitary and comfortable experience!

Headset	Model	Pin	Features	Compatible with radio series
	EEK005	2 Pin	4 shape earhook, 2 Pin	PT22
				RC07D3H
				PT21
				UV-38
				UV-38
	EEK006	2 Pin	4 shape earhook, 2 Pin	PT22
				RC07D3H
				PT21
				UV-38
				UV-38
	EEK007	2 Pin	2 in one method	PT22
				RC07D3H
				PT21
				UV-38
				UV-38
	EEK008	2 Pin	2 shape earhook, 2 Pin	PT22
				RC07D3H
				PT21
				UV-38
				UV-38
	-	2 Pin	Widened boom 4 shape earhook, 2 Pin	PT22
				RC07D3H
				PT21
				UV-38
				UV-38

Retevis Two Way Radio Headsets - Compatibility and Features

Explore Retevis two-way radio headsets, including models EEK005, EEK006, EEK007, and EEK008, with detailed compatibility information for brands like Kenwood, Retevis, Baofeng, and Arcshell.

lang:de score:39 filesize: 153.23 K page_count: 1 document date: 2021-07-13



Acoustic tube earpiece made for your private and clear talk!

Headset	Model	Pin	Features	Compatible with radio series
	K8000	2 Pin	Acoustic tube, noise proof communication noise proof	R22
				RC07D3H
				UV-38
				UV-38
				UV-38
	K8001	2 Pin	Acoustic tube, noise proof communication noise proof	R22
				RC07D3H
				UV-38
				UV-38
				UV-38
	K8002	2 Pin	Acoustic tube, noise proof communication noise clear	R22
				RC07D3H
				UV-38
				UV-38
				UV-38
	K8003	2 Pin	Acoustic tube, noise proof communication noise proof	R22
				RC07D3H
				UV-38
				UV-38
				UV-38
	K8004	2 Pin	Acoustic tube, noise proof communication noise clear	R22
				RC07D3H
				UV-38
				UV-38
				UV-38

Retevis Acoustic Tube Earpieces for Two-Way Radios: Compatibility and Features

Discover Retevis acoustic tube earpieces for secure and clear two-way radio communication. This guide details compatibility with Retevis, Baofeng, and Arcshell models, along with features like private conversations.


lang:de score:39 filesize: 206.46 K page_count: 1 document date: 2023-03-29



[Manual de Instrucciones Baofeng UV-5R | Transceptor Portátil Doble Banda](#)

Descubre el manual de instrucciones completo para el transceptor portátil Baofeng UV-5R. Aprende sobre sus características, instalación de accesorios, carga de batería, funciones avanzadas y especificaciones técnicas. Incluye detalles sobre operación de doble banda, VOX, CTCSS/DCS y gestión de canales.


lang:es score:38 filesize: 369.04 K page_count: 19 document date: 2015-05-07

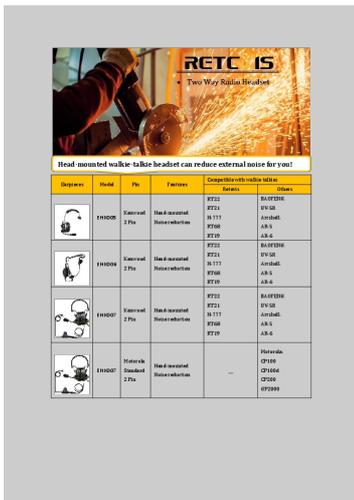

[RETC IS Two Way Radio Headsets - Noise Reduction & Compatibility Guide](#)

Explore RETC IS head-mounted walkie-talkie headsets, featuring noise reduction technology and broad compatibility with popular radio brands like Retevis, Baofeng, and Motorola. View models EHK005, EHK006, and EHK007.

lang:it score:38 filesize: 356.62 K page_count: 1 document date: 2021-07-13

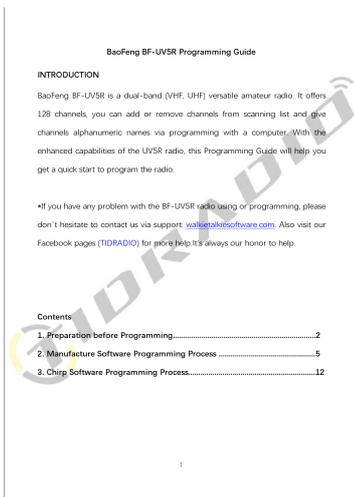

[Baofeng BF-UV5R Programming Guide](#)

A comprehensive guide for programming the BaoFeng BF-UV5R dual-band amateur radio using both the manufacturer's software and the CHIRP software. It covers essential setup steps, software installation, radio connection, parameter configuration, and troubleshooting.

lang:en score:38 filesize: 773.04 K page_count: 14 document date: 2021-03-02

INTRODUCTION

BaoFeng BF-UV5R is a dual-band (VHF, UHF) versatile amateur radio. It offers 128 channels, you can add or remove channels from scanning list and give channels alphanumeric names via programming with a computer. With the enhanced capabilities of the UV5R radio, this Programming Guide will help you get a quick start to program the radio.

If you have any problem with the BaoFeng UV5R radio using or programming, please don't hesitate to contact us via support: support@w01teralkiesoftware.com. Also visit our Facebook pages (TDRADIO) for more help it's always our honor to help

Contents

1. Preparation before Programming.....	2
2. Manufacture Software Programming Process.....	5
3. Chirp Software Programming Process.....	12

[BaoFeng BF-UV5R Programming Guide](#)

A comprehensive guide to programming the BaoFeng BF-UV5R dual-band amateur radio using both the manufacturer's software and CHIRP. Covers system requirements, cable setup, software installation, and detailed parameter explanations for radio customization.

lang:en score:38 filesize: 798.52 K page_count: 14 document date: 2021-03-02

MANUAL DE INSTRUCCIONES EN ESPAÑOL



BAOFENG UV-5R

[Manual de Instrucciones Baofeng UV-5R: Guía Completa y Características](#)

Descubre todas las funciones, especificaciones técnicas y cómo usar tu radio Baofeng UV-5R con este manual detallado en español. Aprende sobre instalación, operación y mantenimiento.

lang:es score:38 filesize: 635.64 K page_count: 19 document date: 2023-03-02



[Baofeng UV-5R](#)

Návod k obsluze



[Baofeng UV-5R User Manual](#)

Comprehensive user manual for the Baofeng UV-5R dual-band two-way radio, covering safety guidelines, product features, setup instructions, battery charging procedures, detailed control descriptions, and advanced menu functions for optimal operation.

lang:hr score:37 filesize: 1.06 M page_count: 10 document date: 2016-01-14



[Baofeng UV-5RE Руководство пользователя портативного УКВ трансивера](#)

Руководство пользователя для любительской двухдиапазонной портативной радиостанции Baofeng UV-5RE с ЖК-дисплеем. Обеспечивает безопасную и надежную связь. Содержит инструкции по эксплуатации для достижения максимальной производительности и предотвращения повреждений.

lang:i-klngon score:37 filesize: 1.08 M page_count: 24 document date: 2015-03-11



[Baofeng UV-5R Dual Band Two-Way Radio User Manual](#)

Comprehensive user manual for the Baofeng UV-5R dual-band two-way radio, covering safety guidelines, detailed features, accessory installation, battery charging and maintenance, and a complete guide to menu operations and specifications. Optimize your Baofeng UV-5R experience with this essential guide.

lang:pt score:37 filesize: 800.59 K page_count: 15 document date: 2012-11-21

Product Name	Baofeng UV-5R Speaker Black
Jack Type	3.5mm headphone jack Ear 2.5mm stereo (top pin) Mic 2.5mm stereo (bottom pin)
Spaced Between Two Pin	11mm
Compatible Baofeng Models:	UV-5R, UV-5RA, UV-5RE, UV-5R TX, UV-5R-Plus, UV-5RT, UV-5X, UV-5X, etc.
Compatible Kenwood Models:	TK-240, TK-250, TK-255, TK-260, TK-260A, TK-270, TK-270A, TK-272A, TK-275, TK-275A, TK-300, TK-300A, TK-350, TK-353, TK-360, TK-360A, TK-370, TK-370A, TK-373A, TK-378, TK-378A, TK-430, TK-433, TK-715, TK-2150, TK-2102, TK-2107, TK-2115, TK-2160, TK-3100, TK-3101, TK-3102, TK-3107, TK-3118, TK-3160
Compatible Linton Models:	P2177, TK-468, P2128
Compatible Wouxun Models:	K2-669, K2-669, P213, K2-LV21P, K2-LV2D
Compatible WEIERWEI Models:	W2-S285

[Baofeng UV-5R Speaker Microphone Compatibility Guide](#)

Detailed compatibility information for the Baofeng UV-5R speaker microphone, including its jack type, pin spacing, and a comprehensive list of compatible two-way radio models from Baofeng, Kenwood, Linton, Wouxun, and WEIERWEI.

lang:i-klngon score:37 filesize: 93.57 K page_count: 1 document date: 2021-05-31

[\[pdf\] User Manual](#)

User Manual AWSKeypad Lock The Baofeng UV 5R EX features a keypad lock that locks out all keys except for the three side To enable or disable press and UV 5REX EN DEbaofeng uv 5rex s3 amazonaws DE |||



Vielen Dank fr Ihren Einkauf bei Radioddity Schauen Sie auf unserer Homepage vorbei fr Anleitungen, Support und vieles vieles mehr <https://www.radioddity.com/> <https://www.facebook.com/radioddity> <https://www.youtube.com/c/Radioddityradio> Handfunkger **UV-5R EX...**

lang:de score:36 filesize: 30.87 M page_count: 78 document date: 2019-01-30

Krótkofalówka Baofeng UV-5R HTQ
kod: 343913 Producent: BAOFENG kod producenta: UV-5R HTQ
Cena: 135.60 zł

Opis

Krótkofalówka Baofeng UV-5R HTQ
Producent: BAOFENG

Cechy

- Ilość klawiszy: 2
- Funkcja VOX: Tak

Waga i wymiary

- Szerokość produktu: 58 mm
- Wysokość produktu: 130 mm
- Głębokość produktu: 30 mm

Wyposażenie

- Kolor produktu: Czarny

Porty i interfejsy

- Sposób ładowania: Wzrostowy
- Pojemność akumulatora: 2000 mAh
- Moc: 1 W
- Sposób ładowania: Tak

Miłośniki

- Aktywne wyłączenie hałasu: Tak
- Redukcja szumów: Tak

Wyposażenie

- Bateria standardowa: Tak
- Lusterka: Tak
- Poziomy pasek: Tak
- Zasilny: 3.0 Ah
- Niezależny zegar: 50.0
- Temperatura pracy (min.) : -30-60°C
- Funkcja VOX: Tak

[Baofeng UV-5R HTQ Krótkofalówka - Specyfikacja i Cechy](#)

Szczegółowy opis i specyfikacja techniczna krótkofalówki Baofeng UV-5R HTQ.

Poznaj cechy, wagę, wymiary, wydajność i porty tego transceivera.

lang:id score:36 filesize: 268.46 K page_count: 2 document date: 2024-03-03

BAOFENG®

ИНСТРУКЦИЯ ПО ЭКСПЛУАТАЦИИ

РАДИОСТАНЦИЯ
BAOFENG UV-5R series

купить радиcи Baofeng:
www.BAOFENG-RUSSIA.com

BAOFENG-RUSSIA

Перевел с англ. А. С. Иркин

[BAOFENG UV-5R Series Portable Two-Way Radio Operation Manual](#)

Comprehensive operation manual for the BAOFENG UV-5R series portable two-way radio, covering safety, features, assembly, battery management, controls, LCD display, operation modes, built-in functions, menu settings, technical specifications, and troubleshooting.

lang:i-klngon score:36 filesize: 454.01 K page_count: 21 document date: 2024-10-26