

SOLIDEE BA20701

SOLIDEE 24-inch Natural Color Bathroom Vanity with Gold Boat Glass Sink Instruction Manual

Model: BA20701

1. INTRODUCTION

This manual provides detailed instructions for the assembly, installation, operation, and maintenance of your SOLIDEE 24-inch Natural Color Bathroom Vanity with Gold Boat Glass Sink. Please read all instructions carefully before beginning assembly and retain this manual for future reference. Ensure all steps are followed precisely for safe and proper use.

2. SAFETY INFORMATION

- Handle sharp edges with care during assembly and installation.
- Be cautious of hot water when using the faucet.
- Always wear appropriate safety gear, such as gloves and eye protection, during assembly.
- Ensure all connections are secure to prevent leaks.
- Do not overtighten screws or fittings, as this may cause damage.
- Keep small parts away from children.

3. PACKAGE CONTENTS

Your SOLIDEE Bathroom Vanity is shipped in two separate packages. Please verify that all components listed below are present before beginning assembly.



Figure 3.1: Packaging overview, indicating two separate boxes for the vanity and sink components.

Package 1: Vanity Cabinet

- Main cabinet components (MDF wood panels)
- All necessary assembly hardware (screws, dowels, cam locks, hinges, drawer slides)
- Installation Manual

Package 2: Sink and Plumbing Components

- Vessel sink (Gold Boat Glass Sink)
- Faucet
- Pop-up drain
- Hot/cold water supply lines
- Mounting hardware for sink and faucet

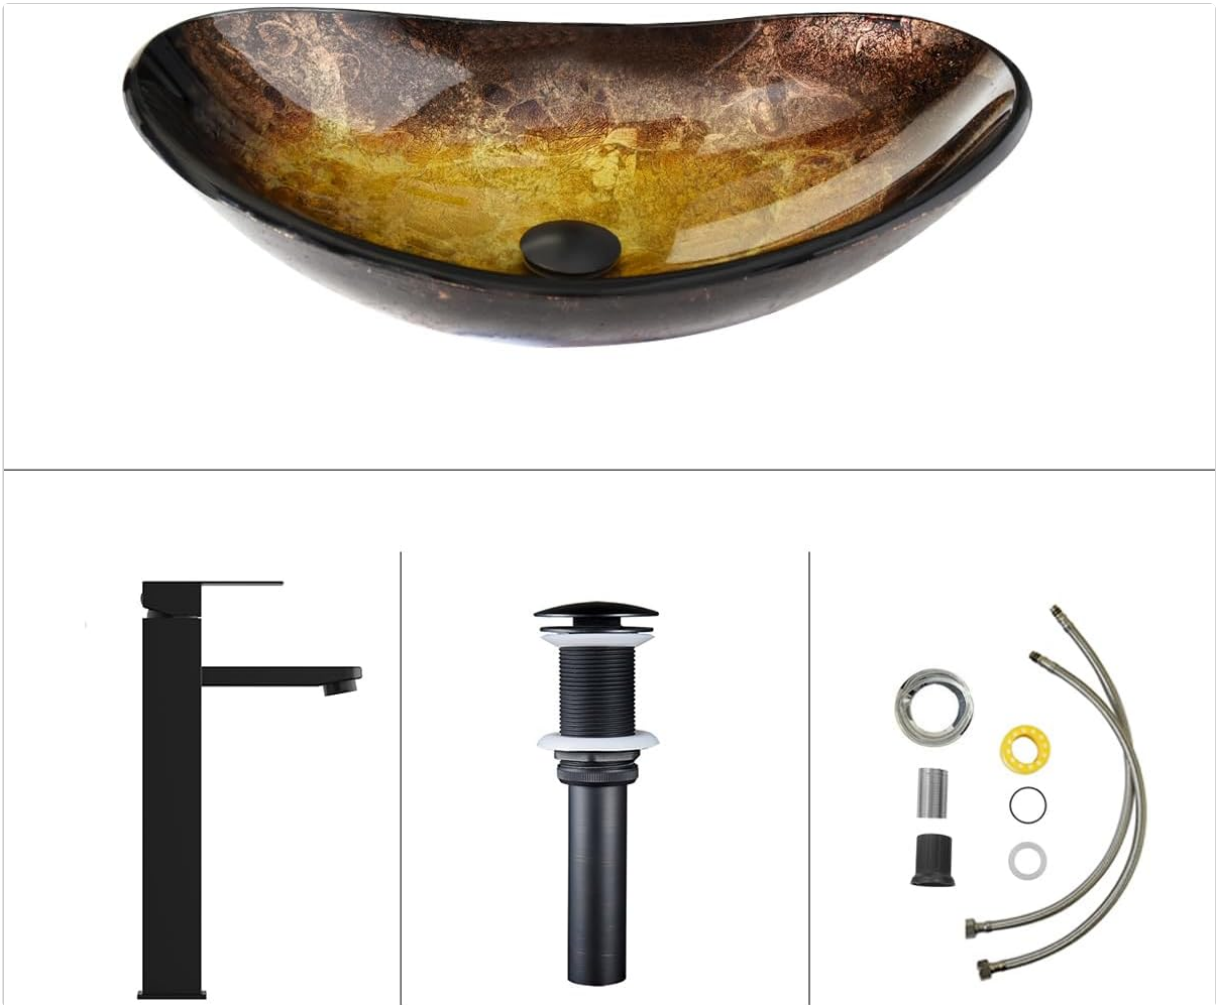



Figure 3.2: Included faucet, pop-up drain, and water supply lines.

4. SPECIFICATIONS

Detailed specifications for the SOLIDEE 24-inch Natural Color Bathroom Vanity.



Figure 4.1: Vanity cabinet dimensions.

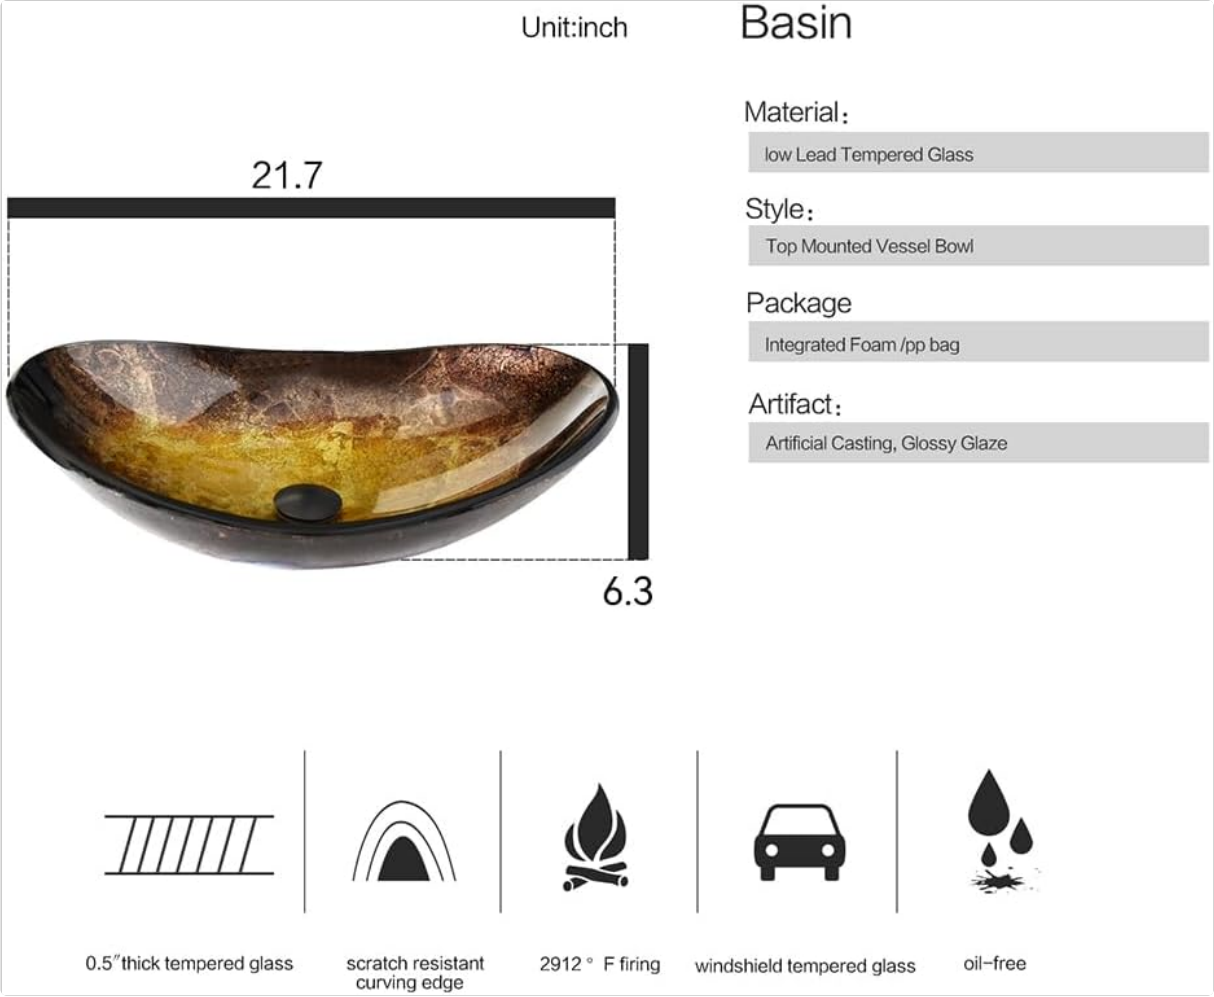

This product requires self-assembly. Follow the steps below carefully. It is recommended to have two people for assembly and installation.

5.1. Vanity Cabinet Assembly

1. **Unpack Components:** Carefully remove all parts from Package 1 and lay them out on a clean, soft surface to prevent scratches. Verify all parts against the included parts list.
2. **Assemble Side Panels:** Attach the side panels to the bottom panel using the provided hardware (dowels and cam locks). Ensure the pre-drilled holes align correctly.
3. **Install Back Panel:** Secure the back panel to the assembled sides and bottom.
4. **Attach Top Panel:** Fasten the top panel to the assembled structure. Ensure the sink opening is correctly oriented.
5. **Assemble Drawer:** Follow the specific instructions in the included manual to assemble the drawer components and install the drawer slides onto the cabinet.
6. **Install Doors:** Attach the hinges to the cabinet doors and then to the cabinet frame. Adjust hinges as needed for proper door alignment.
7. **Attach Handles:** Secure the zinc alloy handles to the drawer and cabinet doors.



Figure 5.1: Assembled vanity with sink and faucet.

5.2. Sink and Faucet Installation

Before proceeding, ensure your plumbing is ready for connection. It is recommended to consult a professional plumber if you are unsure about any plumbing steps.

1. **Position Sink:** Place the Gold Boat Glass Sink onto the vanity top, aligning it with the pre-drilled opening.
2. **Install Faucet:** Insert the faucet into the designated hole on the vanity top. Secure it from underneath with the provided washers and nuts. Connect the hot and cold water supply lines to the faucet.
3. **Install Pop-up Drain:** Insert the pop-up drain into the sink's drain hole. Apply plumber's putty or silicone sealant around the drain flange to ensure a watertight seal. Secure the drain assembly from underneath the sink with the provided washers and nuts.
4. **Connect Water Supply:** Connect the hot and cold water supply lines from the faucet to your home's water supply valves. Ensure all connections are hand-tightened, then use a wrench for a final quarter-turn, being careful not to overtighten.
5. **Connect Drain:** Connect the pop-up drain to your existing P-trap and wastewater line. Ensure all connections are secure and watertight.
6. **Test for Leaks:** Turn on the water supply slowly and check all connections for any leaks. Tighten any leaking connections as necessary.

6. OPERATION

The SOLIDEE Bathroom Vanity with Gold Boat Glass Sink is designed for standard bathroom use.

- **Faucet Use:** Operate the faucet handle to control water flow and temperature. Move the handle up for water flow and left/right for hot/cold water.
- **Pop-up Drain:** Push down on the drain stopper to close the drain and fill the sink. Push again to open the drain and allow water to flow out.
- **Storage:** Utilize the cabinet and drawer for storing bathroom essentials. The magnetic doors ensure smooth opening and closing.

Upgraded storage design provides more storage space



Figure 6.1: Internal storage capacity of the vanity cabinet.

7. MAINTENANCE

Proper care and maintenance will ensure the longevity and appearance of your bathroom vanity.

- **Cleaning the Vanity:** Wipe the MDF wood surfaces with a soft, damp cloth. Avoid abrasive cleaners or harsh chemicals that could damage the finish.
- **Cleaning the Sink:** Clean the glass vessel sink with a non-abrasive glass cleaner or mild soap and water. Rinse thoroughly and dry with a soft cloth to prevent water spots.
- **Faucet Care:** Clean the faucet with a soft cloth and mild soap. Avoid harsh chemicals that can corrode the finish.
- **Regular Checks:** Periodically check all plumbing connections for leaks and tighten if necessary. Inspect hinges and drawer slides for smooth operation and lubricate if needed.

8. TROUBLESHOOTING

If you encounter any issues, refer to the following common troubleshooting tips.

Problem	Possible Cause	Solution
Water Leakage	Loose plumbing connections, improper sealant application.	Check and tighten all water supply and drain connections. Reapply plumber's putty or silicone sealant if necessary.
Sink Drain Wobbly	Drain assembly not securely tightened or incorrect washer placement.	Ensure all washers and nuts on the drain assembly are correctly positioned and securely tightened from underneath the sink. Refer to the specific drain installation instructions.
Faucet Low Water Pressure	Aerator clogged, water supply valves not fully open.	Remove and clean the faucet aerator. Ensure both hot and cold water supply valves are fully open.
Cabinet Doors Misaligned	Hinges not properly adjusted.	Adjust the screws on the hinges to align the cabinet doors.

9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact SOLIDEE customer service. Keep your purchase receipt and model number (BA20701) handy for faster service.

Contact information can typically be found on the manufacturer's website or through your point of purchase.