Blütezeit ME-LB-6AH

Blütezeit 21V Cordless Leaf Blower

INSTRUCTION MANUAL

Model: ME-LB-6AH

Product Overview

The Blütezeit 21V Cordless Leaf Blower is designed for efficient clearing of leaves, grass clippings, dust, and debris from various outdoor and indoor surfaces. Its lightweight and ergonomic design, combined with a powerful motor and variable speed control, make it suitable for a range of tasks from light sweeping to heavy-duty blowing.



Image: The Blütezeit 21V Cordless Leaf Blower, showcasing the main unit, 6.0Ah battery, charger, and two interchangeable air tubes (round and flat nozzle).

Key features include a 21V 6.0Ah high-capacity battery for extended runtime, a fast charger, up to 400 CFM airflow and 150 MPH wind speed, and 6 variable speed options with a turbo mode for an instant power boost.

Important Safety Instructions

WARNING: Read all safety warnings and instructions before operating this product. Failure to follow the warnings and instructions may result in electric shock, fire, and/or serious injury.

- Always wear eye protection (safety glasses) and hearing protection when operating the blower.
- Do not operate the blower in wet conditions or rain.
- Keep children, bystanders, and pets at least 50 feet (15 meters) away from the operating area.
- Inspect the work area before use. Remove all objects such as rocks, broken glass, nails, wire, or string that can be thrown or become entangled in the blower.
- Do not point the blower nozzle at people or animals.
- Ensure the battery is fully charged before first use for optimal performance.
- Use only the specified battery and charger provided by Blütezeit.
- Do not operate the blower without the air tube properly attached.
- Store the blower and battery in a dry, secure location away from direct sunlight and extreme temperatures.

What's Included

Your Blütezeit Cordless Leaf Blower package includes the following components:

- 1 x 21V Large Caliber Cordless Leaf Blower Unit

- 1 x 6.0Ah Lithium-Ion Battery
- 1 x Battery Charger
- 2 x Air Tubes (Round and Flat Nozzle)

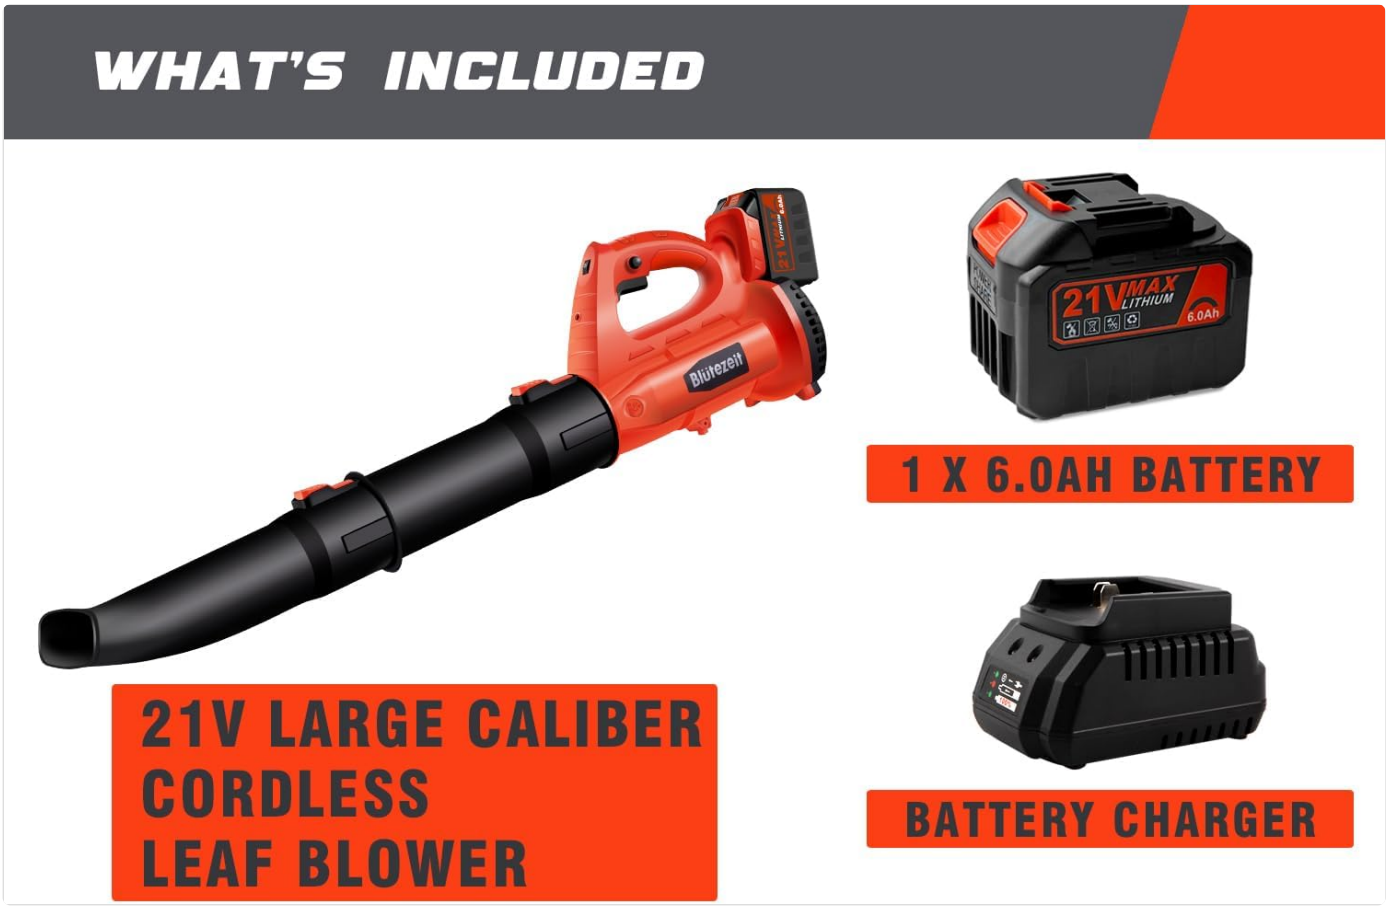

Image: A visual representation of the Blütezeit leaf blower, its 6.0Ah battery, and the battery charger, indicating all items included in the package.

Setup and Assembly

1. **Charging the Battery:**
   Before first use, fully charge the 6.0Ah Lithium-Ion battery. Connect the charger to a standard power outlet and insert the battery into the charger. The charging indicator light on the charger will show the charging status. A full charge typically takes approximately 4 hours.



Image: A detailed view of the 21V 6.0Ah Lithium-Ion battery, highlighting its capacity and voltage.

2. **Attaching the Air Tube:**
   Select the desired air tube (round or flat nozzle) based on your cleaning needs. Align the tube with the blower's air outlet and push it firmly until it clicks into place. Ensure it is securely fastened before operation.



Image: An illustration detailing the components of the leaf blower, including the variable speed control, snap-on extension tube (flat vent), and detachable air tube (round vent).

The blower supports a 3-way setup with two air ducts for various installation methods, adapting to different

scenarios.



Image: This diagram shows the flexibility of the blower's design, allowing for three different configurations using the two provided air tubes to suit various cleaning tasks.

3. **Inserting the Battery:**
   Slide the charged battery into the battery slot on the blower handle until it locks securely. Ensure it is fully seated to prevent accidental dislodgement during operation.

Operating Instructions

1. **Starting the Blower:**
   Press the power button or pull the trigger to start the blower. The blower features a trigger lock for continuous operation, reducing hand fatigue during longer tasks.



Image: A detailed view of the blower's handle, highlighting the switch for selecting one of the six available speed options.

2. **Adjusting Speed:**

The blower offers 6 variable speeds to accommodate different cleaning requirements. Use the speed adjustment dial or switch to select the appropriate airflow. For stubborn debris or larger areas, activate the Turbo Mode for maximum power (up to 400 CFM airflow and 150 MPH wind speed).



Image: A close-up of the blower's jet fan design, illustrating the powerful motor capable of generating up to 400 CFM and 150 MPH airflow.

3. **General Usage Tips:**
    - Hold the blower firmly with one hand, utilizing its lightweight design (approximately 6.7 lbs).
    - Sweep from side to side, moving debris into piles for easier collection.
    - For wet leaves or heavier debris, use higher speed settings or Turbo Mode.
    - The 6.0Ah battery provides up to 25 minutes of runtime on max speed. Plan your tasks accordingly or have a charged spare battery for longer jobs.

Maintenance

- **Cleaning:**
  After each use, disconnect the battery and clean the exterior of the blower with a damp cloth. Remove any debris from the air intake vents to ensure proper airflow and prevent overheating. Do not use harsh chemicals or abrasive cleaners.
- **Battery Care and Storage:**
  Store the battery in a cool, dry place, away from direct sunlight and extreme temperatures. For long-term storage, it is recommended to charge the battery to about 50% capacity. Do not store fully discharged batteries.
- **General Inspection:**
  Periodically check all screws and fasteners for tightness. Ensure the air tubes are not cracked or damaged. If any parts are damaged, contact customer support for replacement.

Troubleshooting

Problem	Possible Cause	Solution
Blower does not start.	Battery not inserted correctly or discharged.	Ensure battery is fully seated. Charge the battery.
Reduced airflow or power.	Air intake/outlet blocked; battery low; wrong speed setting.	Clear any obstructions. Recharge battery. Select a higher speed or Turbo Mode.
Short runtime.	Battery not fully charged; operating continuously at max speed.	Ensure battery is fully charged (4 hours). Max speed consumes battery faster.
Blower stops during operation.	Battery overheated or fully discharged.	Allow battery to cool down before recharging. Recharge battery.

Specifications

Feature	Detail
Brand	Blütezeit
Model Name	Leaf Blower
Item Model Number	ME-LB-6AH
Power Source	Battery Powered
Voltage	21 Volts
Battery Type	Lithium Ion (6.0Ah included)
Air Flow Capacity	Up to 400 Cubic Feet Per Minute (CFM)
Speed	Up to 150 Miles per Hour (MPH)
Speeds	6 Variable Speeds + Turbo Mode
Item Weight	6.7 lbs (2.8 Kilograms)
Product Dimensions	37"L x 7"W x 10"H
Material	Polypropylene (PP)
Included Components	Blower Unit, 6.0Ah Battery, Charger, 2 Tubes
UPC	723497807081

Warranty and Customer Support

Blütezeit is committed to providing high-quality products and excellent customer service. If you encounter any issues with your leaf blower, or require assistance with setup, usage, or troubleshooting, please contact our customer support team.

Our responsive customer service team is available to help within 24 hours.

For more information about Blütezeit products and support, you may visit the officialBlütezeit Store on Amazon.

Please note that protection plans are available for purchase separately to extend coverage beyond the standard warranty. Details on these plans can be found on the product's purchase page.

© 2025 Blütezeit. All rights reserved.
This manual is for informational purposes only. Specifications are subject to change without notice.