Heswea LY-508B

Electronic Acupuncture Pen Instruction Manual

Model: LY-508B

1. Introduction

The Heswea Electronic Acupuncture Pen is a modern device designed for needleless acupuncture and meridian point detection. It combines traditional Chinese medicine principles with advanced electronic technology to provide a safe and convenient way to stimulate acupuncture points, improve blood circulation, and relieve various physical discomforts. This manual provides comprehensive instructions for its safe and effective use.



Figure 1: Heswea Electronic Acupuncture Pen (Model LY-508B)

2. Safety Information

Important: Please read all safety warnings and directions before using this product. Failure to do so may result in injury or device malfunction.

- Not suitable for pregnant individuals.
- It should not be used simultaneously with in vivo implantable electronic devices, artificial heart or lung, or other electronic medical apparatus and instruments.
- Pregnant women and women with menstruation, people with skin abnormalities, patients with acute high fever and others are prohibited from using it.
- Children or persons without the ability to express consciousness should not use it.
- Critical and emergency patients such as tumor patients are prohibited from using it.
- Content on this site is for reference purposes and is not intended to substitute for advice given by a physician, pharmacist, or other licensed health-care professional. You should not use this information as self-diagnosis or for treating a health problem or disease. Contact your health-care provider immediately if you suspect that you have a medical problem.

3. Components

The package includes the following items:

- Electronic Acupuncture Pen (Model LY-508B)
- 3 Replaceable Massage Heads (Dome type, 5mm Ball, 3mm Ball)
- Current Conducting Rod (Reflow rod)
- USB Charging Cable
- User Manual
- Acupoint Chart

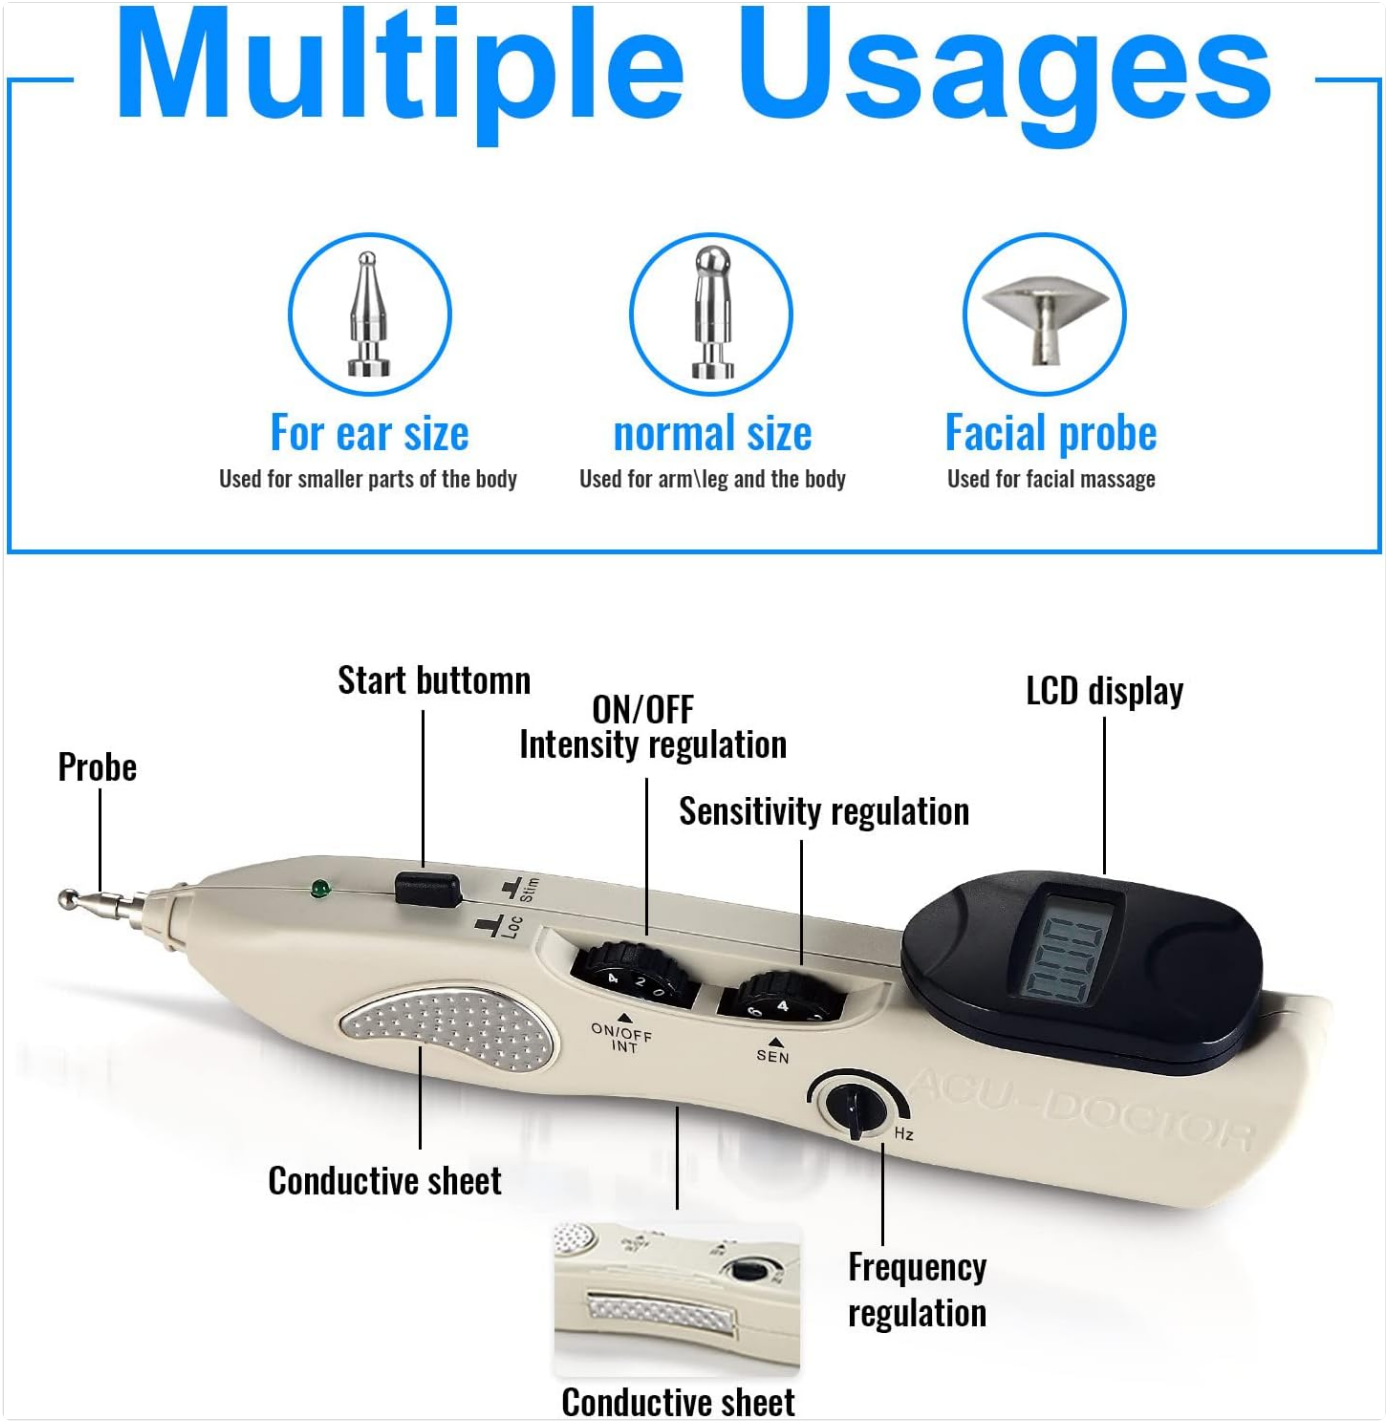


Figure 2: Overview of the Electronic Acupuncture Pen and its parts.



Figure 3: Product dimensions and types of massage heads included.

4. Setup

4.1 Charging the Device

The Meridian Pen is wireless and rechargeable. Before first use, ensure the device is fully charged.

- Connect the USB charging cable to the charging port on the side of the pen.
- Plug the other end of the USB cable into a USB charging head or a computer's USB port.
- The power light will indicate charging status. It turns from green (charging) to off (fully charged).



Figure 4: Charging the Electronic Acupuncture Pen via USB.

4.2 Attaching Massage Heads

The pen comes with three replaceable massage heads for different applications:

- **Dome type massage head:** Mostly used for facial massage.
- **5mm Ball massage head:** Mostly used for body massage.
- **3mm Ball massage head:** Mostly used for smaller parts of the body, such as ears.

To attach a head, simply screw it onto the tip of the pen until secure.



Figure 5: Different massage heads for varied applications.

5. Operating Instructions

Follow these steps for effective use of the Electronic Acupuncture Pen:

1. **Prepare the Skin:** If the skin is dry, the device may not work effectively. Apply some gel, cream, or lotion to the skin before use to improve conductivity.
2. **Adjust Settings:**
    - **Hz knob (Frequency):** Turn the 'Hz' knob to the desired value.
    - **SEN knob (Sensitivity):** Start with 'SEN' at '2'. If there is no beep and the light does not flash, gradually increase the 'SEN' setting until you hear a continuous beep sound and the light is flashing (approximately 2 beeps per second is ideal). Setting sensitivity too high may result in inaccurate detection.
    - **ON/OFF/INT knob (Intensity):** Start at intensity level '1' (weakest) and gradually adjust the intensity level as

needed. The higher the 'INT' setting, the stronger the pulse sensation.



Figure 6: Adjusting Intensity and Sensitivity.

3. **Hold the Pen Correctly:** Hold the pen like a writing pen. Ensure your thumb is in contact with the metal conductive sheet on the side of the pen. If using the current conducting rod, hold the rod in your other hand to complete the circuit.
4. **Find Acupoints Automatically:** Slowly slide the acupuncture pen along the skin. When the device detects an acupoint, the warning light will flash and a beeping sound will become more urgent. The larger the value on the LCD display, the closer you are to the acupoint.
5. **Apply Pulse Massage:** Once an acupoint is located, press the pulse key to deliver the massage. The pen stimulates acupuncture points through bioelectricity, reaching muscles and relieving pain.

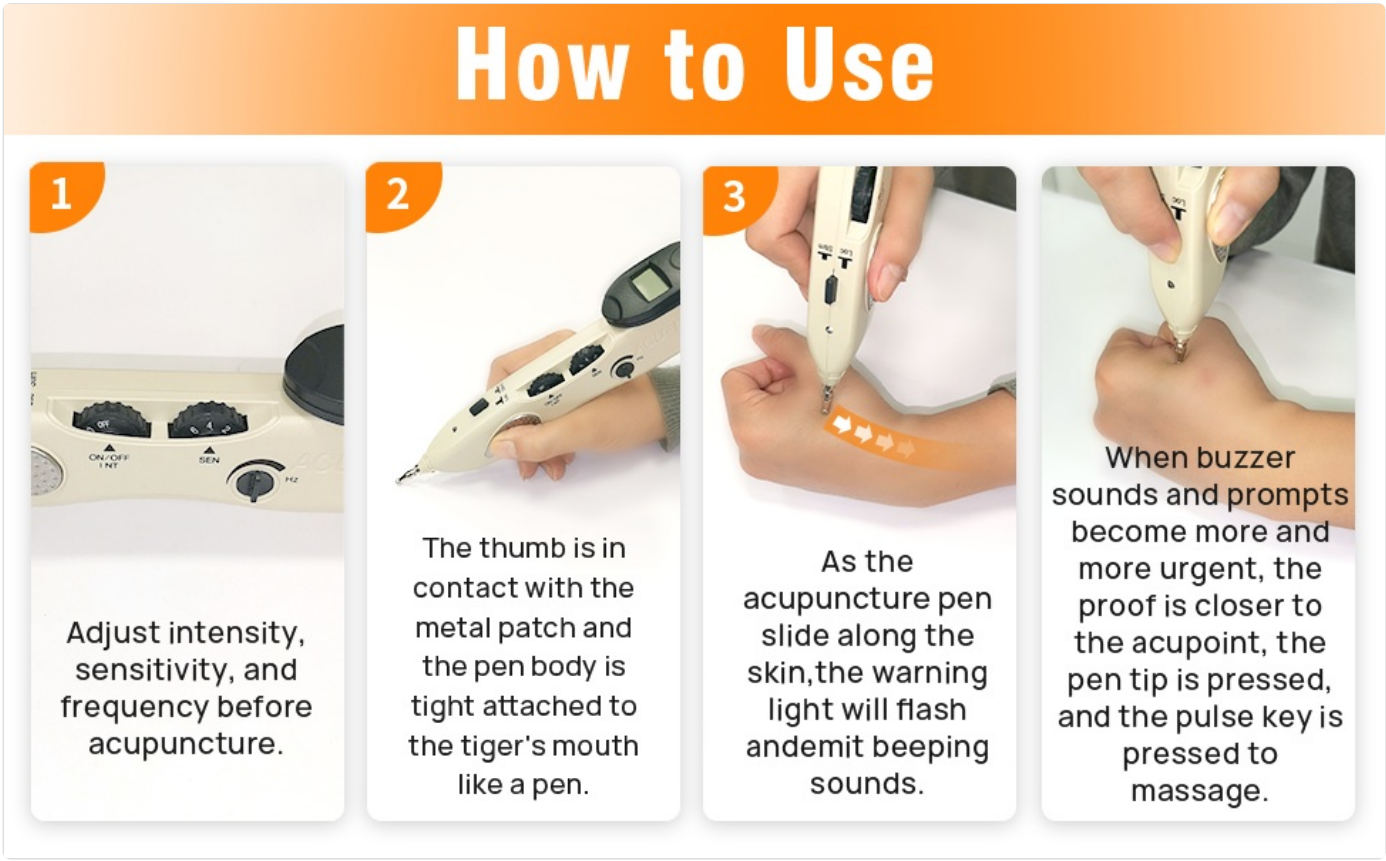


Figure 7: Visual guide for using the acupuncture pen.

5.1 Official Product Videos

Your browser does not support the video tag.

Video 1: Electronic Acupuncture Pen Overview. This video provides a general introduction and demonstration of the product's features and operation.

Your browser does not support the video tag.

Video 2: Acupuncture Meridian Pen Application. This video demonstrates how to apply the pen for meridian point stimulation.

Your browser does not support the video tag.

Video 3: Acupuncture Pen Model 508B Demonstration. A short preview showing the device in use.

Your browser does not support the video tag.

Video 4: Acupuncture Pen Usage. A brief demonstration of how to use the pen.

6. Multiple Use & Application

The Electronic Acupuncture Pen is versatile and can be used on various parts of the body for different purposes:

- **Pain Relief:** Effective in relieving acute and chronic physical pain caused by arthritis, muscle, joint, or back pain.
- **Acupoint Stimulation:** Use the acupoint chart provided in the manual to locate specific therapeutic points for targeted relief.
- **Facial Massage:** Use the biggest round shape head (Dome type) for facial massage.
- **Ear Acupressure:** Use the small 3mm ball head for smaller parts of the body like ears.

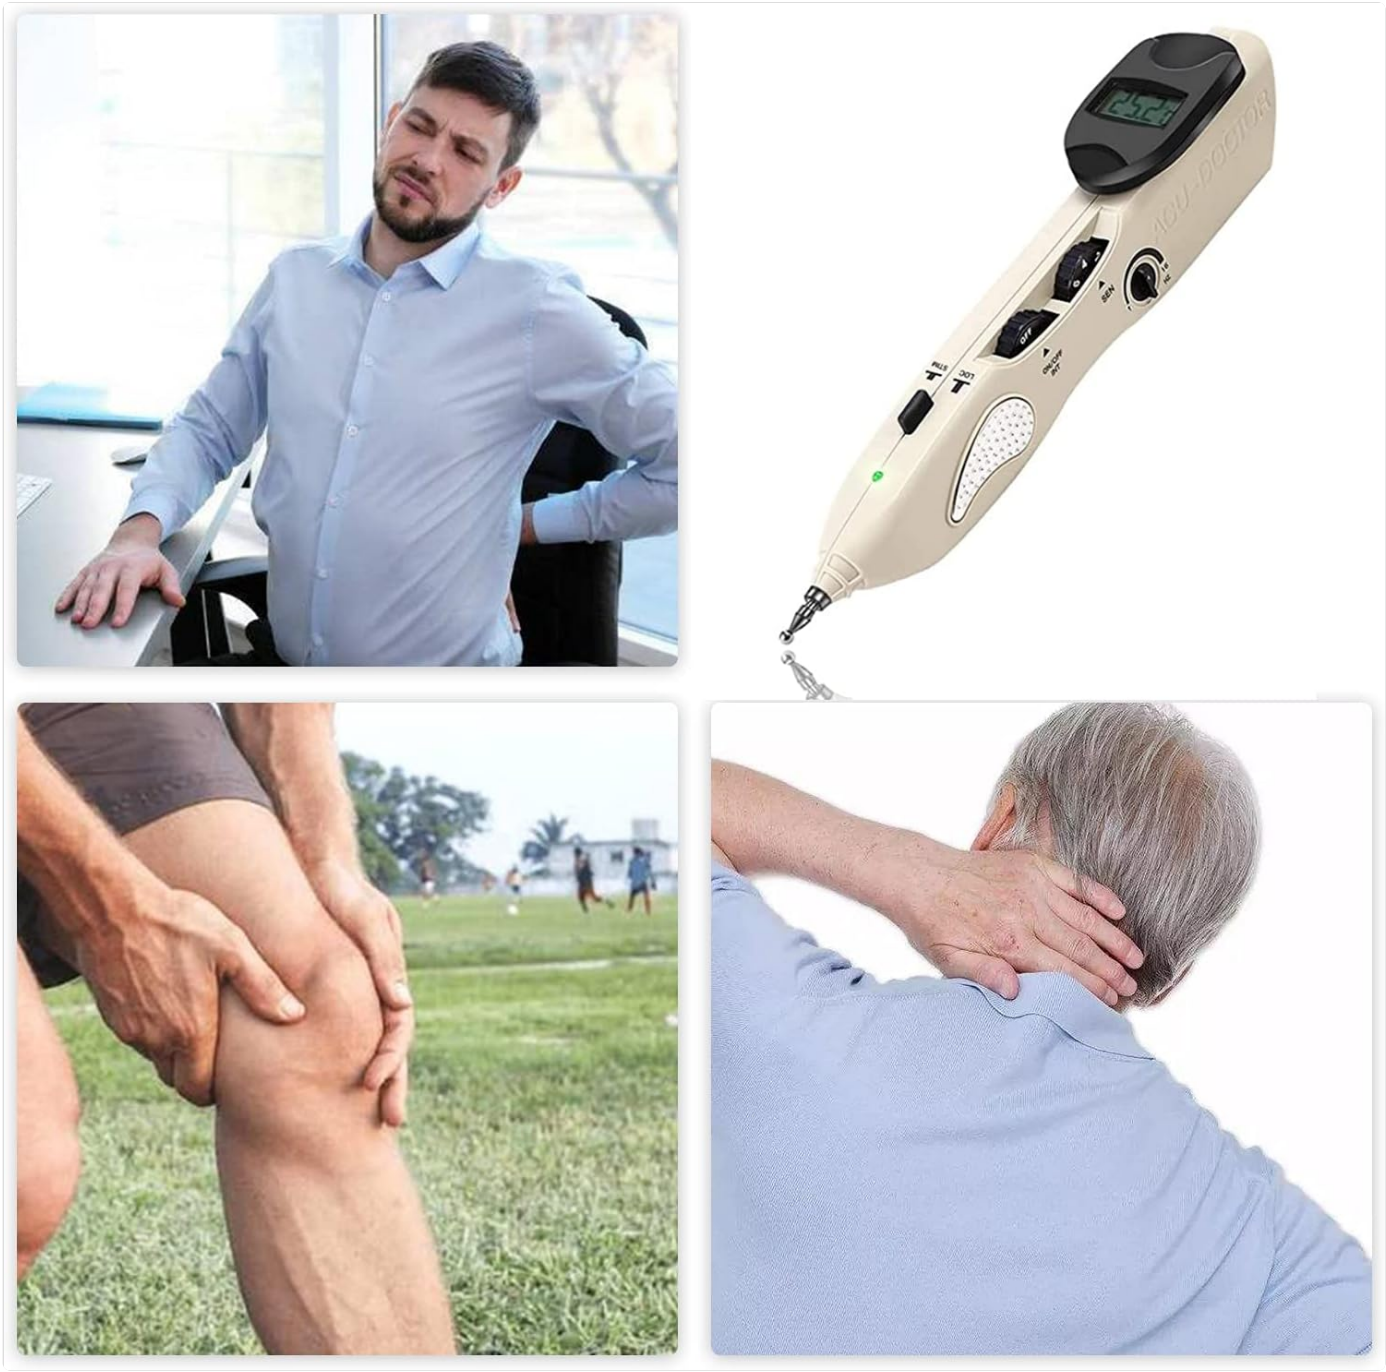


Figure 8: Examples of body areas for application.



Figure 9: Acupoint chart for reference.

7. Maintenance

- Clean the device regularly with a soft, dry cloth.
- Do not immerse the device in water or any other liquids.
- Store the pen in a cool, dry place away from direct sunlight and extreme temperatures.
- Ensure the device is fully charged before long-term storage to maintain battery health.

8. Troubleshooting

- **Device not working/no sensation:**
  - Ensure the skin is not dry. Apply gel or lotion to improve conductivity.
  - Check the battery level and recharge if necessary.
  - Adjust the 'SEN' (Sensitivity) knob to a higher setting until the light flashes and a beep is heard.
  - Ensure your thumb is in contact with the metal conductive sheet or the current conducting rod is held correctly.
- **Inconsistent stimulation:**
  - Ensure consistent contact with the skin.

- Adjust sensitivity and intensity settings as per your skin's condition and desired effect.

9. Specifications

Feature	Detail
Model Number	LY-508B
Brand	Heswea
Power Source	Battery Powered (1 Lithium Ion battery required)
Material	Plastic
Intensity Adjustment	10 levels (0-off, 1-weakest, 10-strongest)
Sensitivity Adjustment	10 levels
Package Dimensions	10.12 x 4.17 x 1.85 inches
Item Weight	13.12 ounces

10. Warranty & Support

For any problems with the product, please do not hesitate to contact Heswea customer service. They aim to provide 100% satisfaction after the sale.

Legal Disclaimer: While product information is provided, manufacturers may alter ingredient lists or product details. Always read labels, warnings, and directions before using or consuming a product. This information is for reference purposes only and not a substitute for professional medical advice.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question