

Manuals.plus /

- › Los Flexi /
- › Los Flexi KBLF01TC01 Concealed In-Wall Toilet Tank Carrier Instruction Manual

## Los Flexi KBLF01TC01

# Los Flexi KBLF01TC01 Concealed In-Wall Toilet Tank Carrier Instruction Manual

Model: KBLF01TC01 | Brand: Los Flexi

## INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Los Flexi KBLF01TC01 Concealed In-Wall Toilet Tank Carrier. This system is designed for wall-hung toilets, offering a sleek, modern aesthetic by concealing the tank and plumbing within the wall. It features a dual-flush mechanism for water efficiency and adjustable height for flexible installation.

## PACKAGE CONTENTS

Please verify that all components listed below are present in your package before beginning installation.



**Image Description:** A visual representation of the Los Flexi Concealed In-Wall Toilet Tank Carrier package contents. It includes the main blue steel frame with the white tank, a Tank Carrier Fastening Kit (screws, bolts, brackets), a Tank-to-Bowl Installation Kit (pipes, washers, nuts), an Adapter, a Dual Flush Actuator Plate (black with two buttons), a Push Plate Cover (white plastic box), and a Mud Guard Kit (black caps and sleeves).

- LF Concealed In-Wall Toilet Tank & Carrier (Blue steel frame with white tank)
- Dual-Flush Actuator Plate (Black)
- Installation Hardware Kit (Includes Tank Carrier Fastening Kit, Tank-to-Bowl Installation Kit, Adapter, Push Plate Cover, Mud Guard Kit)

## SPECIFICATIONS

Feature	Detail
Model Number	KBLF01TC01
Brand	Los Flexi
Material	Stainless Steel
Product Dimensions	2.8"D x 19.7"W x 49.4"H
Item Weight	40 Pounds
Installation Type	Wall Mounted
Flush System	Dual Flush (0.8 GPF / 1.6 GPF)
Adjustable Height	0-4 3/4 inches
Water Inlet	G 1/2" or G 5/8" (adapter included)





LOS FLEXI

**CONCEALED WATER TANK**

Fits Most Wall-hung Toilets



Water Saving



Secure Hold



Adjustable Height



High Load Capacity

**Image Description:** A detailed diagram illustrating the dimensions of the Los Flexi Concealed In-Wall Toilet Tank Carrier. Key measurements include overall height (49 4/16"), width (19 11/16"), and depth (3 3/8"). It also shows the adjustable height range for the footings and the internal pipe diameters.

## SETUP & INSTALLATION

Professional installation is recommended. Ensure all local plumbing codes are followed. A sturdy frame and proper drainage system must be in place before starting.

### Tools and Materials Required (Not Supplied):

- Tape Measure
- Adjustable Wrench
- Double-ended Wrench
- Drill
- Level
- Marker

### Installation Steps:

1. **Prepare the Carrier:** Loosen the bolts at the bottom of the carrier legs. Adjust the carrier to the proper elevation and ensure it is level using a spirit level.
2. **Position and Mark:** Carefully position the carrier into the wall frame. Mark the anchor points on the floor and the wall.
3. **Drill Holes:** Remove the carrier. Drill holes at the marked footing positions on the floor and on both sides of the wall.
4. **Secure the Carrier (Wall):** Move the carrier back to the installation position. Insert the bolt through the washer, feed it into the carrier hole, attach the angle fixture, and tighten the nut with a double-ended wrench. Thread the lag screw into the drilled holes on the wall and tighten. Repeat for the other side.
5. **Secure the Carrier (Floor):** Thread lag screws into the footing installation holes and tighten with a wrench. Repeat for the other side.
6. **Install Mud Guards:** Place a mud guard into the outlet pipe and another into the inlet pipe.
7. **Install Mounting Rods:** Screw the toilet bowl threaded mounting rods into the proper positions on both sides of the carrier. Place a mud protection sleeve over each mounting rod.
8. **Prepare for Push Plate:** Remove the splash guard on top of the tank by pressing the tab on the panel. Attach the push plate cover and secure it with four small screws.

### Installation Video Guide:

Your browser does not support the video tag.

**Video Description:** This official Los Flexi installation guide demonstrates the step-by-step process of installing the concealed in-wall toilet tank carrier. It covers adjusting the carrier height, securing it to the floor and wall studs, installing the drain and inlet pipes, and preparing the tank for the flush plate. This video is provided by the seller, Flow KB Store.


## OPERATING INSTRUCTIONS

---

The Los Flexi KBLF01TC01 features a dual-flush system for efficient water usage.


- **Partial Flush (0.8 GPF):** Press the smaller button on the actuator plate for liquid waste. This conserves water.
- **Full Flush (1.6 GPF):** Press the larger button on the actuator plate for solid waste. This provides a powerful flush.

# Flexible Adjustment

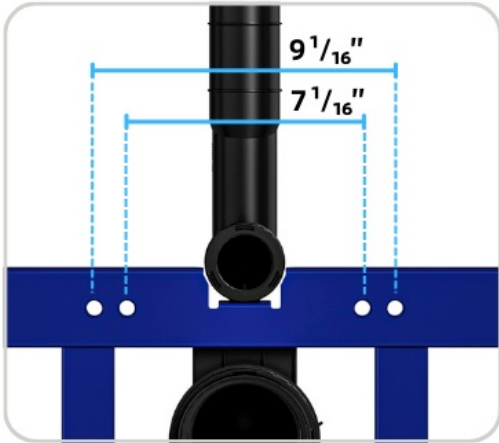

## Two Types of Toilet Bowl Mounting Hole Spacing

7 1/16" or 9 1/16" hole spacing for different installation options

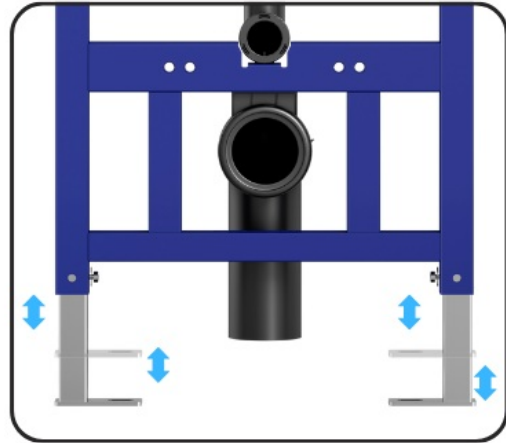

## Adjustable height for Customization and flexibility

0-4 3/4" range adjustable height to suit your needs

**Image Description:** A diagram highlighting the key features of the In-Wall Tank Carrier, including the dual flush system, large capacity concealed water tank, water tank flushing pipe, robust steel frame, discharge pipe, and adjustable height mechanism.

# All-In-One Package

Comes with all the mounting hardware for hassle-free installation.



Tank Carrier Fastening Kit



Dual Flush Actuator Plate



G 1/2" to G 5/8" Adapter

\*For water line connection



Tank-to-Bowl Installation Kit



Push Plate Cover


Mud Guard Kit

**Image Description:** This image illustrates the flexible adjustment features of the tank carrier. It shows two types of toilet bowl mounting hole spacing (7 1/16" or 9 1/16") and an adjustable height range of 0-4 3/4" for customization.

## MAINTENANCE

The Los Flexi tank carrier is designed for easy maintenance.

1. **Accessing the Tank:** The removable flush plate provides quick access to the inner tank and valves. To remove, hold the panel with both hands and push upward.
2. **Cleaning:** Regularly clean the actuator plate and visible surfaces with a mild, non-abrasive cleaner. Avoid harsh chemicals that may damage the finish.
3. **Internal Components:** The integrated components inside the tank allow for quick and easy maintenance if internal adjustments or repairs are needed.

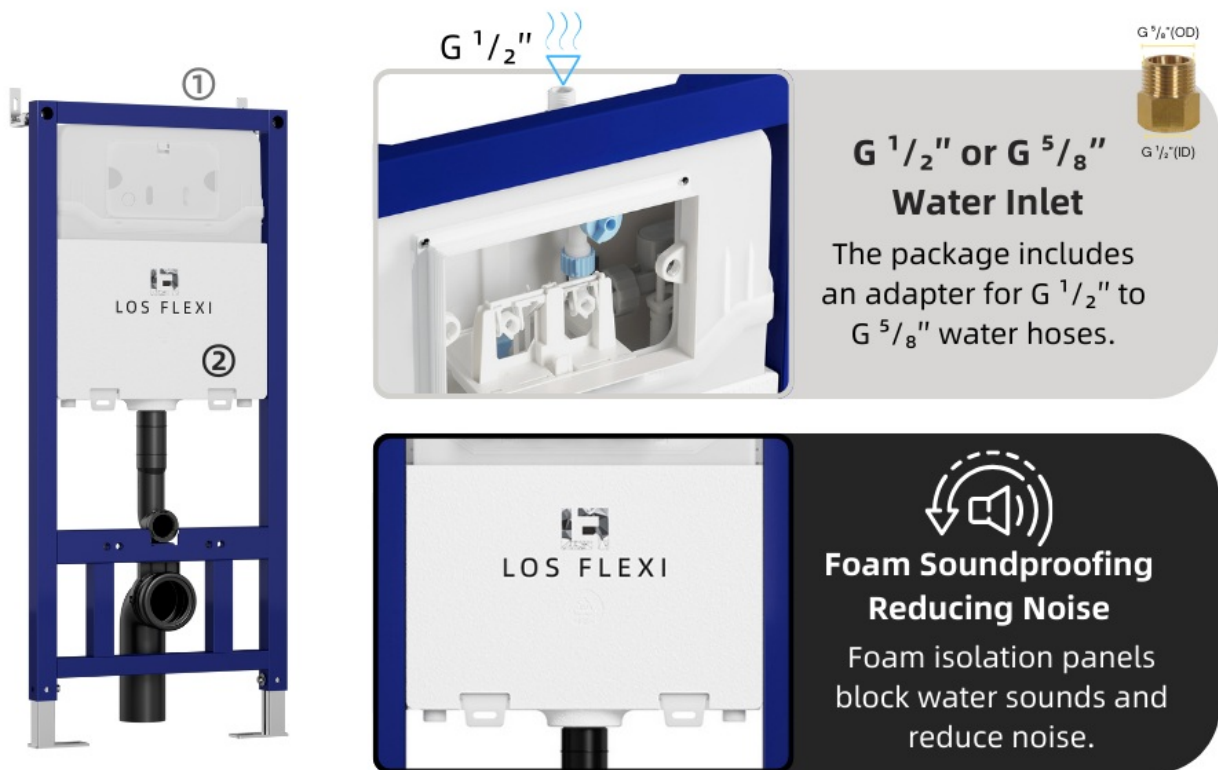

**Image Description:** This image demonstrates the easy maintenance feature. Step 01 shows how to hold and push the flush plate upward to remove it. Step 02 reveals the integrated components inside the tank, indicating quick and easy access for maintenance.

## TROUBLESHOOTING

If you encounter issues with your Los Flexi tank carrier, refer to the common problems and solutions below.

Problem	Possible Cause	Solution
Water continuously runs into the bowl.	Flapper or fill valve issue.	Access the tank (see Maintenance section) and inspect the flapper for proper seal. Check the fill valve for obstructions or damage. Adjust or replace as needed.
Weak flush.	Low water level in tank or clogged rim jets.	Ensure the water level in the tank is at the recommended line. Clean the rim jets under the toilet bowl rim.
Leakage around the toilet base.	Improper seal between toilet and drain pipe, or loose mounting.	Check the connection of the toilet bowl to the drain pipe. Ensure mounting studs are securely tightened. Re-seal if necessary.

## WARRANTY & CUSTOMER SUPPORT

Your Los Flexi KBLF01TC01 Concealed In-Wall Toilet Tank Carrier comes with a comprehensive warranty plan, which includes two years of warranty support. For any inquiries, issues, or to claim warranty service, please contact Los Flexi customer service. Our reliable customer service team is ready to assist you. For further assistance, please visit the [Los Flexi Store](#).