

GEREE Q8

GEREE Wireless WiFi Video Doorbell Camera

MODEL: Q8 - USER MANUAL

Product Overview

The GEREE Wireless WiFi Video Doorbell Camera (Model Q8) is designed to enhance your home security with advanced features such as human motion detection, two-way audio, and wide-angle video. This battery-powered device offers convenient monitoring and communication from anywhere via its dedicated mobile application.



Figure 1: GEREE Wireless WiFi Video Doorbell Camera with smartphone interface.

Key Features:

- **Two-Way Audio:** Communicate with visitors at your door from your smartphone, even when you are away. This feature allows for real-time conversations with couriers or guests.
- **Instant Notifications:** Receive immediate alerts on your phone via the *AiwiT APP* when motion is

detected or the doorbell is pressed.

- **2.4G Stable WiFi Connectivity:** Ensures reliable connection for video streaming and notifications.
Note: This device supports 2.4GHz WiFi only, not 5GHz.
- **Cloud Storage:** Provides 3 days of loop recording free cloud storage. Extended cloud services may be available for purchase within the app.
- **Accurate Humanoid Detection:** Configurable motion detection to specifically identify human movements, reducing false alarms from animals or vehicles. Sensitivity settings (High, Medium, Low) are available.
- **IP65 Weatherproof:** Designed to withstand various weather conditions, ensuring durability for outdoor installation.
- **Rechargeable Batteries:** Equipped with long-lasting lithium batteries for extended operation. Battery status can be monitored via the *Aiwi APP*.
- **Multiple-User Sharing:** Share access to the doorbell's live feed and recordings with up to 7 family members or friends.
- **Night Vision:** Provides clear video monitoring in low-light conditions and at night.

Setup Guide

Follow these steps for initial setup and installation of your GEREE Video Doorbell.

1. Initial Charging

Before first use, remove the insulation tape from the batteries and fully charge the doorbell. You can check the charging status in the *Aiwi APP* once connected.



Figure 2: Charging the doorbell batteries.

2. Download and Install the App

Search for and download the **Aiwi** application from your device's app store (App Store for iOS or Google Play for Android).



Figure 3: Easy setup process: Download app, connect, and enjoy.

3. Connect to WiFi

Open the *AiwiT APP* and follow the on-screen instructions to connect your doorbell camera to your 2.4GHz WiFi network. Ensure your WiFi signal strength is adequate for optimal performance (signal strength around -40 is stable; exceeding -60 indicates a very weak signal).

4. Physical Installation

The package includes all necessary installation accessories. Mount the doorbell securely using the provided screws and wall anchors. Refer to the user manual included in the package for detailed installation diagrams.



Figure 4: Installation accessories and dimensions.

Operating Instructions

Two-Way Audio Communication

When a visitor presses the doorbell or motion is detected, you will receive a notification on your

smartphone. Open the *AiwiT APP* to view the live feed and use the two-way talk button to communicate with the person at your door.

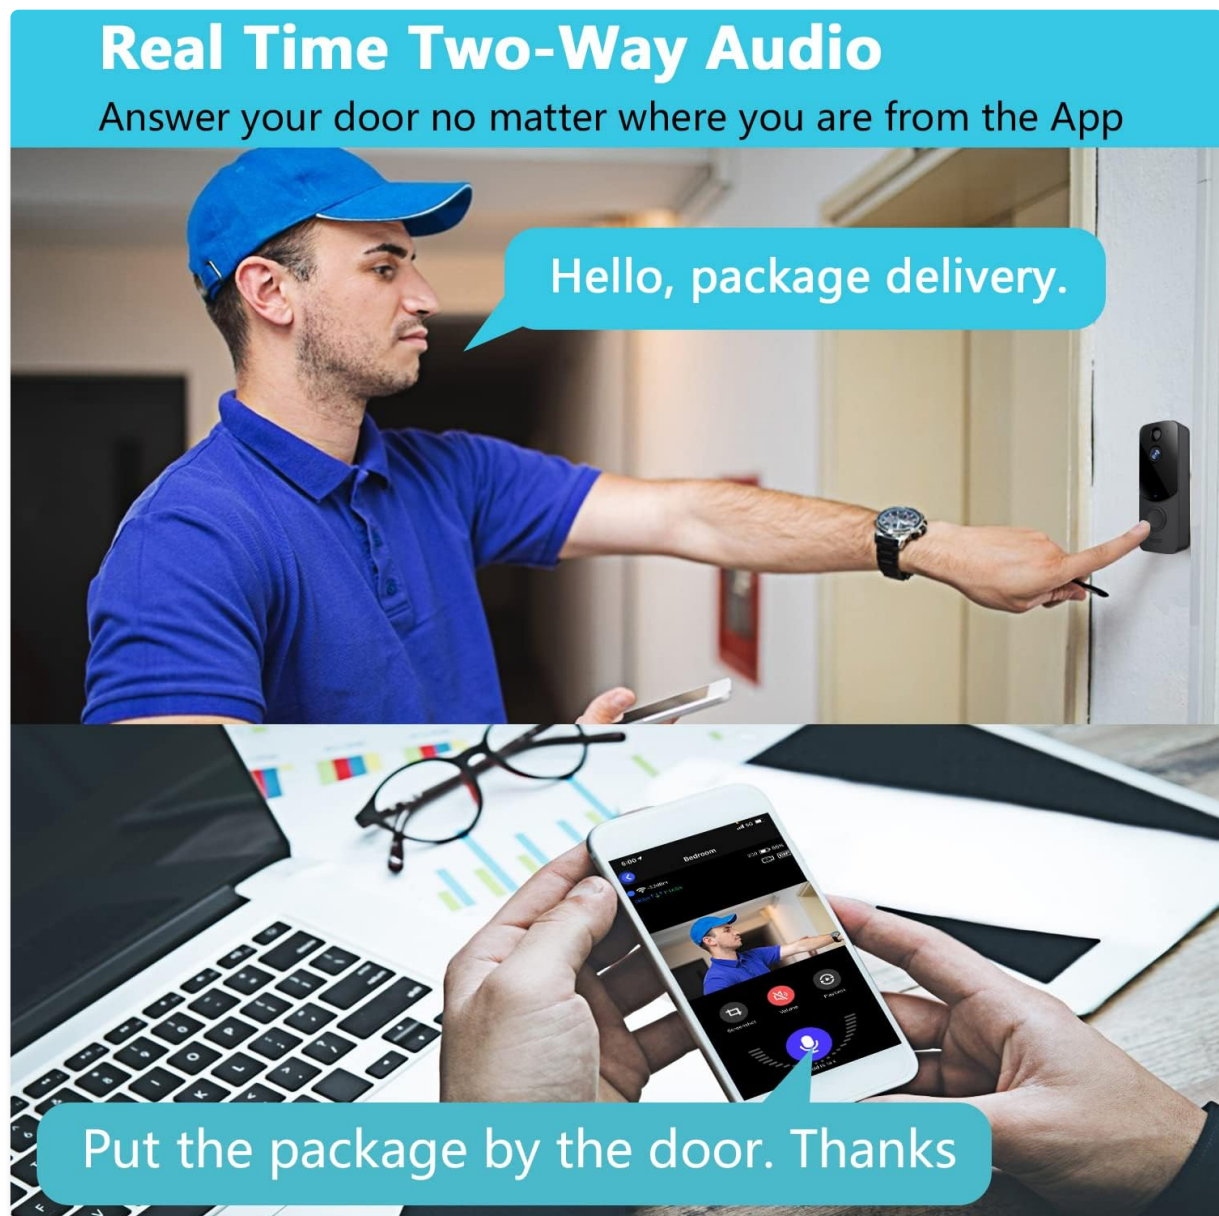


Figure 5: Real-time two-way audio in action.

Motion Detection Settings

Configure the humanoid detection sensitivity within the *AiwiT APP*. You can choose between High, Medium, or Low settings to optimize detection and minimize unwanted alerts. For example, setting it to around 50 can reduce interruptions, while setting it to 1 will detect even cars.

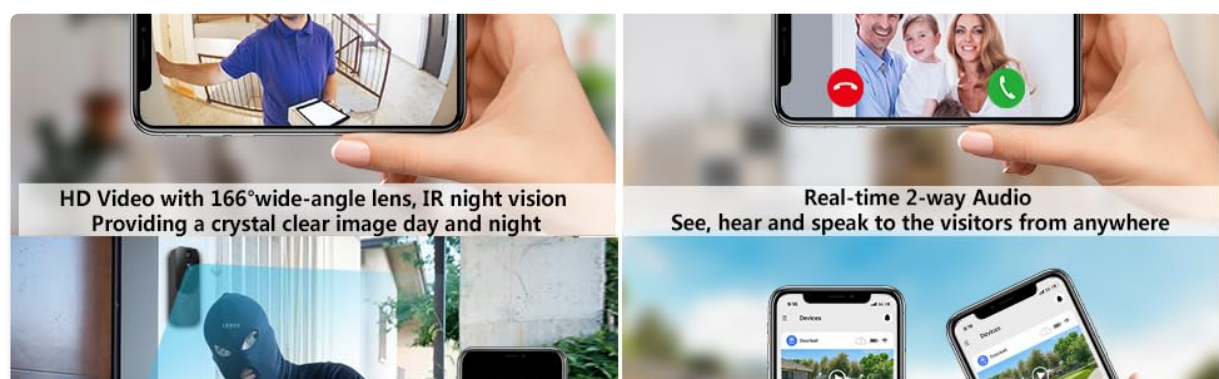


Figure 6: Humanoid detection settings and alerts.

Cloud Storage Access

Recorded videos are automatically uploaded to the cloud. Access your video history through the *AiwiT APP*. The doorbell provides 3 days of loop recording. For longer storage, consider purchasing additional cloud services via the app.



Figure 7: Cloud storage interface and video timeline.

Night Vision

The doorbell automatically switches to infrared night vision in low-light conditions, providing clear black-and-white video footage.



Figure 8: Day and night vision comparison.

Multi-User Sharing

To share access with family or friends, navigate to the sharing options within the *Aiwiit APP* and invite other users. Up to 7 users can access the doorbell simultaneously.

Maintenance

Battery Charging

The doorbell is powered by rechargeable lithium batteries. When the battery level is low, you will receive a notification via the *Aiwiit APP*. Remove the doorbell from its mounting bracket and charge it using the provided USB cable. The charging status can be monitored in the app.

Weather Resistance

The GEREE doorbell is IP65 weatherproof, designed to withstand rain and snow. Periodically inspect the device for any debris or obstructions on the camera lens or motion sensor to ensure optimal performance.

Troubleshooting

- **No Notifications on Phone:** Ensure the *Aiwiit APP* is running in the background and that push notifications are enabled for the app in your phone's settings. If the app is closed, you may not receive video call reminders.
- **Poor Video Quality or Disconnections:** Check your WiFi signal strength. If the signal is weaker than -60, consider moving your WiFi router closer or using a WiFi extender to strengthen the signal to the doorbell.
- **Short Battery Life:** Ensure the batteries are fully charged before initial use. High motion detection sensitivity or frequent live view access can drain the battery faster. Adjust motion detection settings to reduce unnecessary recordings.
- **Doorbell Not Ringing Indoors:** The video doorbell and indoor chime are sold separately. If you require an indoor chime, please ensure you have purchased and paired it according to its specific instructions.
- **False Motion Alerts:** Adjust the humanoid detection sensitivity in the *Aiwiit APP* to a lower setting (e.g., around 50) to prevent alerts from non-human movements like animals or passing vehicles.

Specifications

Feature	Specification
Model Name	Q8
Brand	GEREE
Video Capture Resolution	720p
Viewing Angle	166 Degrees
Wireless Communication Technology	Wi-Fi (2.4GHz only)
Power Source	Battery Powered (2 Lithium Metal batteries included)




Material	Acrylonitrile Butadiene Styrene (ABS)
Item Dimensions (L x W x H)	13.5 x 5.6 x 3 Centimetres
Item Weight	300 g
Special Features	Motion Sensor, Night Vision, Two-Way Audio
Installation Type	Screw In / Wall Mount
IP Rating	IP65 Weatherproof



Warranty and Support

The GEREE Wireless WiFi Video Doorbell Camera comes with a **one-year warranty** from the date of purchase. For technical support, troubleshooting assistance, or warranty claims, please contact GEREE customer service through the contact information provided on the product packaging or the official GEREE website. Please have your model number (Q8) and purchase details ready when contacting support.

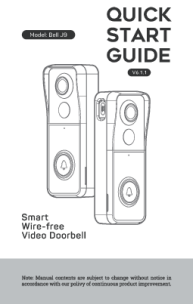© 2024 GEREE. All rights reserved.

Related Documents - Q8

	<p>Bell J9 Smart Wire-free Video Doorbell Quick Start Guide</p> <p>This guide provides instructions for setting up and using the Bell J9 Smart Wire-free Video Doorbell, including installation, app download, pairing with a chime, and troubleshooting.</p>
	<p>Smart Video Doorbell Quick Start Guide: Setup, Installation, and Features</p> <p>Comprehensive quick start guide for the Smart 1080P Full-HD Video Doorbell. Learn how to set up, install, connect the chime, use the app, and troubleshoot common issues.</p>
	<p>MUBILIFE Bird Feeder Camera (Q8) Quick Start Guide</p> <p>A comprehensive quick start guide for the MUBILIFE Bird Feeder Camera (Q8). This document details setup, app connection, installation, product specifications, sharing features, and troubleshooting. Learn how to enhance your bird-watching experience with smart technology.</p>

	<p>V380 Pro Smart Camera Setup and Features Guide</p> <p>Comprehensive setup and user guide for the V380 Pro smart camera. Learn how to connect to Wi-Fi, configure cloud storage, manage alarm settings, and understand FCC compliance. Includes detailed steps for Android and iOS devices.</p>
	<p>Macro Video Technologies XVV-3630S-Q8 WiFi Smart Camera User Manual</p> <p>User manual for the Macro Video Technologies XVV-3630S-Q8 WiFi Smart Camera, covering setup, configuration, cloud storage, and FCC compliance.</p>