

Happybuy GZT61*45*85

Happybuy Stainless Steel Work Table User Manual

Model: GZT61*45*85

[Safety](#) [Contents](#) [Setup](#) [Features](#) [Operation](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Support](#)

1. SAFETY INSTRUCTIONS

Read all instructions carefully before assembly and use. Keep this manual for future reference.

- Ensure all components are present and undamaged before assembly.
- Assemble the table on a clean, flat, and stable surface to prevent scratching or damage.
- Do not exceed the maximum load capacity of 700 lbs (317.5 kg) for the entire table. The upper shelf supports up to 400 lbs, and the lower shelf supports up to 300 lbs.
- Distribute weight evenly across the table surfaces.
- Always lock the swivel casters when the table is in a stationary position to prevent accidental movement.
- Keep hands and fingers clear of moving parts during assembly and when adjusting the shelf height.
- Regularly inspect the table for loose bolts or signs of wear. Tighten bolts as needed.
- Do not use abrasive cleaners or harsh chemicals on the stainless steel surface, as this may cause damage.

2. PACKAGE CONTENTS

Verify that all the following components are included in your package:

- 1 x Stainless Steel Tabletop
- 1 x Stainless Steel Undershelf
- 4 x Stainless Steel Legs
- 4 x Swivel Casters (2 with locking brakes)
- 4 x Triangular Plates
- 12 x Hexagon Socket Bolts M8*16mm
- 4 x M8 Nuts
- 1 x Hex Wrench (for bolts)

3. SETUP AND ASSEMBLY INSTRUCTIONS

Follow these steps to assemble your Happybuy Stainless Steel Work Table:

1. **Unpack Components:** Carefully remove all parts from the packaging and lay them out on a clean, soft surface to prevent

scratches.

2. Attach Legs to Tabletop:

Position the tabletop upside down. Insert the top end of each leg into the corner sockets on the underside of the tabletop. Secure each leg using the triangular plates and M8*16mm hexagon socket bolts. Ensure the bolts are tightened firmly with the provided hex wrench.



Image: Detail of leg attachment with triangular plate for enhanced stability.

3. Install Undershelf:

Slide the undershelf onto the legs. The undershelf has pre-drilled holes that align with the adjustment points on the legs. Secure the undershelf at your desired height using the remaining M8*16mm hexagon socket bolts and M8 nuts. Ensure all bolts are securely fastened.

ADJUSTABLE BOTTOM SHELF

Make it easier for you to place different kitchen supplies

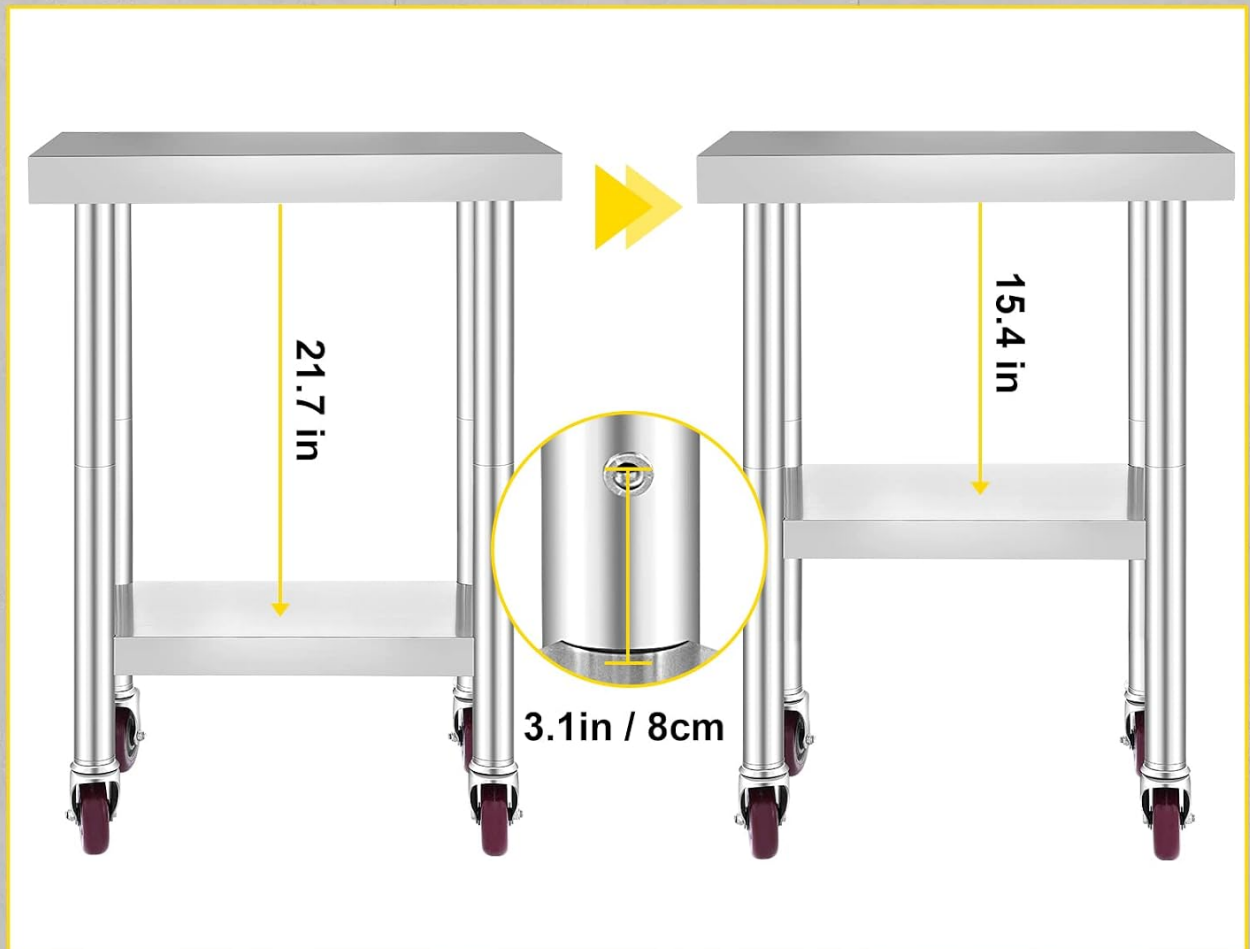


Image: Illustration of the adjustable bottom shelf, demonstrating height customization.

4. Attach Casters:

Screw the four swivel casters into the bottom of each leg. Ensure that the two casters with locking brakes are installed on the same side for easier access and control.

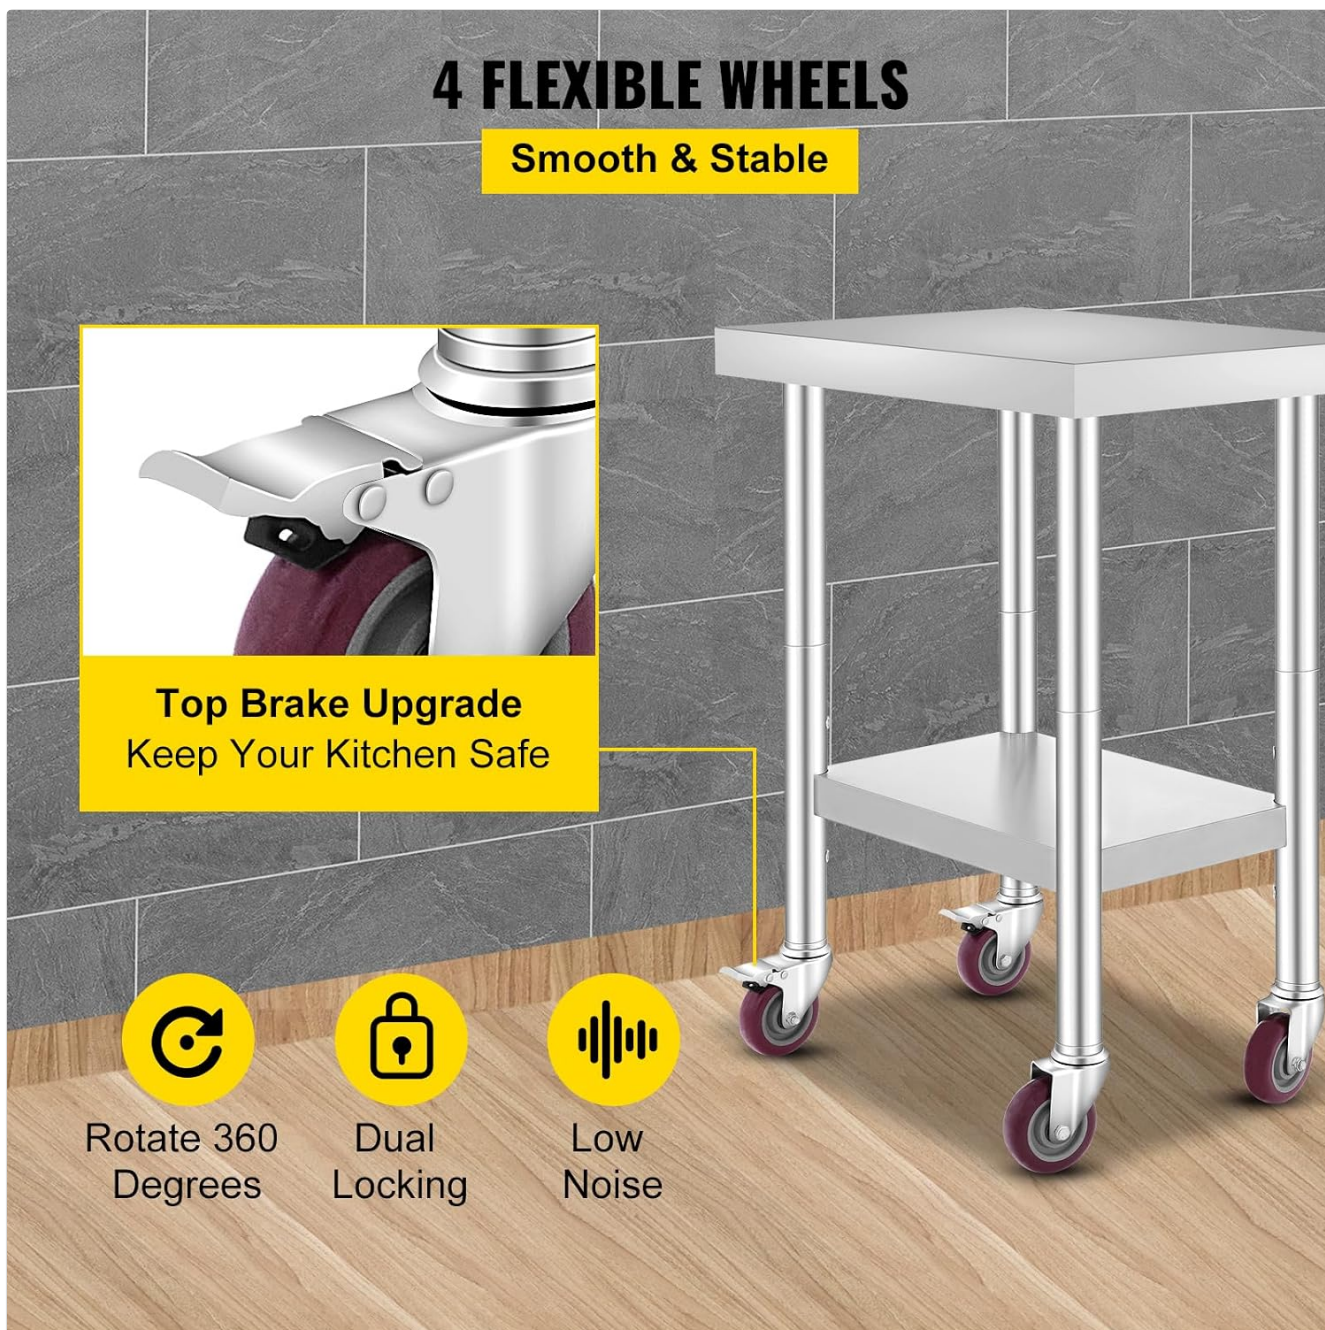


Image: Detail of a flexible wheel with a top brake upgrade for stability and safety.

5. **Final Check:** Once assembled, carefully turn the table upright. Ensure all bolts are tight and the table is stable. Lock the brakes on the casters before placing any items on the table.

4. KEY FEATURES

- **High-Quality Stainless Steel Construction:** Made from SUS201 stainless steel for the top, shelves, and legs, offering excellent rust resistance and an easy-to-clean surface.
- **Robust Load Capacity:** The upper shelf can support up to 400 lbs (181 kg), and the lower shelf up to 300 lbs (136 kg), with a total table capacity of 700 lbs (317.5 kg).
- **Adjustable Underself:** Features three adjustable shelf levels, allowing customization of height to accommodate various items and storage needs.
- **Mobile Design with Locking Casters:** Equipped with four durable swivel casters for easy movement, two of which include locking brakes to ensure stability when stationary.
- **Versatile Applications:** Suitable for a wide range of environments including commercial kitchens, bars, restaurants, catering events, schools, and home use.

COMMERCIAL WORKTABLE WITH UNDERSHELF

Increase your kitchen work space with this

work table



Image: The work table in a kitchen environment, demonstrating its utility with a microwave and other items.

LARGE & PRACTICAL STORAGE

Confidently rest heavy duty supplies on two shelves



Image: Illustration of the table's large storage capacity and stability, with indicated weight limits for each shelf.

5. OPERATING INSTRUCTIONS

- **Moving the Table:** To move the table, unlock the brakes on the two locking casters. Gently push or pull the table to its desired location.
- **Securing the Table:** Once the table is in position, press down on the levers of the two locking casters to engage the brakes. This will prevent the table from moving unintentionally.
- **Adjusting Shelf Height:** To adjust the height of the undershelf, carefully remove the items from the shelf. Loosen the bolts securing the shelf to the legs, reposition the shelf to one of the three available height levels, and then re-tighten the bolts securely. Ensure the shelf is level before placing items back on it.
- **Weight Distribution:** Always distribute weight evenly across the tabletop and undershelf to maintain stability and prevent tipping. Do not concentrate heavy loads in one small area.

6. MAINTENANCE AND CLEANING

Proper maintenance ensures the longevity and hygiene of your stainless steel work table.

- **Daily Cleaning:** Wipe down all stainless steel surfaces with a soft cloth dampened with warm water and a mild detergent. Rinse thoroughly with clean water and dry immediately to prevent water spots and streaks.
- **Stubborn Stains:** For more stubborn stains, use a specialized stainless steel cleaner. Always wipe in the direction of the grain of the stainless steel.
- **Avoid Abrasives:** Do not use abrasive pads, steel wool, or harsh chemical cleaners (e.g., bleach, ammonia-based cleaners) as these can scratch or damage the stainless steel finish.
- **Caster Maintenance:** Periodically check the casters for debris (hair, lint, etc.) and clean them to ensure smooth movement. Lubricate the swivel mechanisms if they become stiff.
- **Bolt Inspection:** Regularly check all bolts and fasteners for tightness. Re-tighten any loose bolts to maintain the table's structural integrity and stability.

7. TROUBLESHOOTING

Refer to this section for common issues and their solutions.

Problem	Possible Cause	Solution
Table is wobbly or unstable.	Loose bolts; uneven floor; casters not locked.	Ensure all assembly bolts are securely tightened. Move the table to a level surface. Lock the brakes on the casters.
Casters are difficult to roll.	Debris in caster wheels; casters locked.	Check for and remove any debris (e.g., hair, lint) from the caster wheels. Ensure caster brakes are disengaged. Lubricate swivel mechanisms if necessary.
Undershelf is not level.	Bolts not tightened evenly; shelf not seated correctly.	Loosen shelf bolts, adjust the shelf to ensure it is level, and then re-tighten all bolts evenly and securely.
Rust spots appear on stainless steel.	Exposure to harsh chemicals; prolonged contact with corrosive materials; improper cleaning.	Clean immediately with a stainless steel cleaner. Avoid using abrasive materials or harsh chemicals. Ensure surfaces are dried after cleaning.

8. SPECIFICATIONS

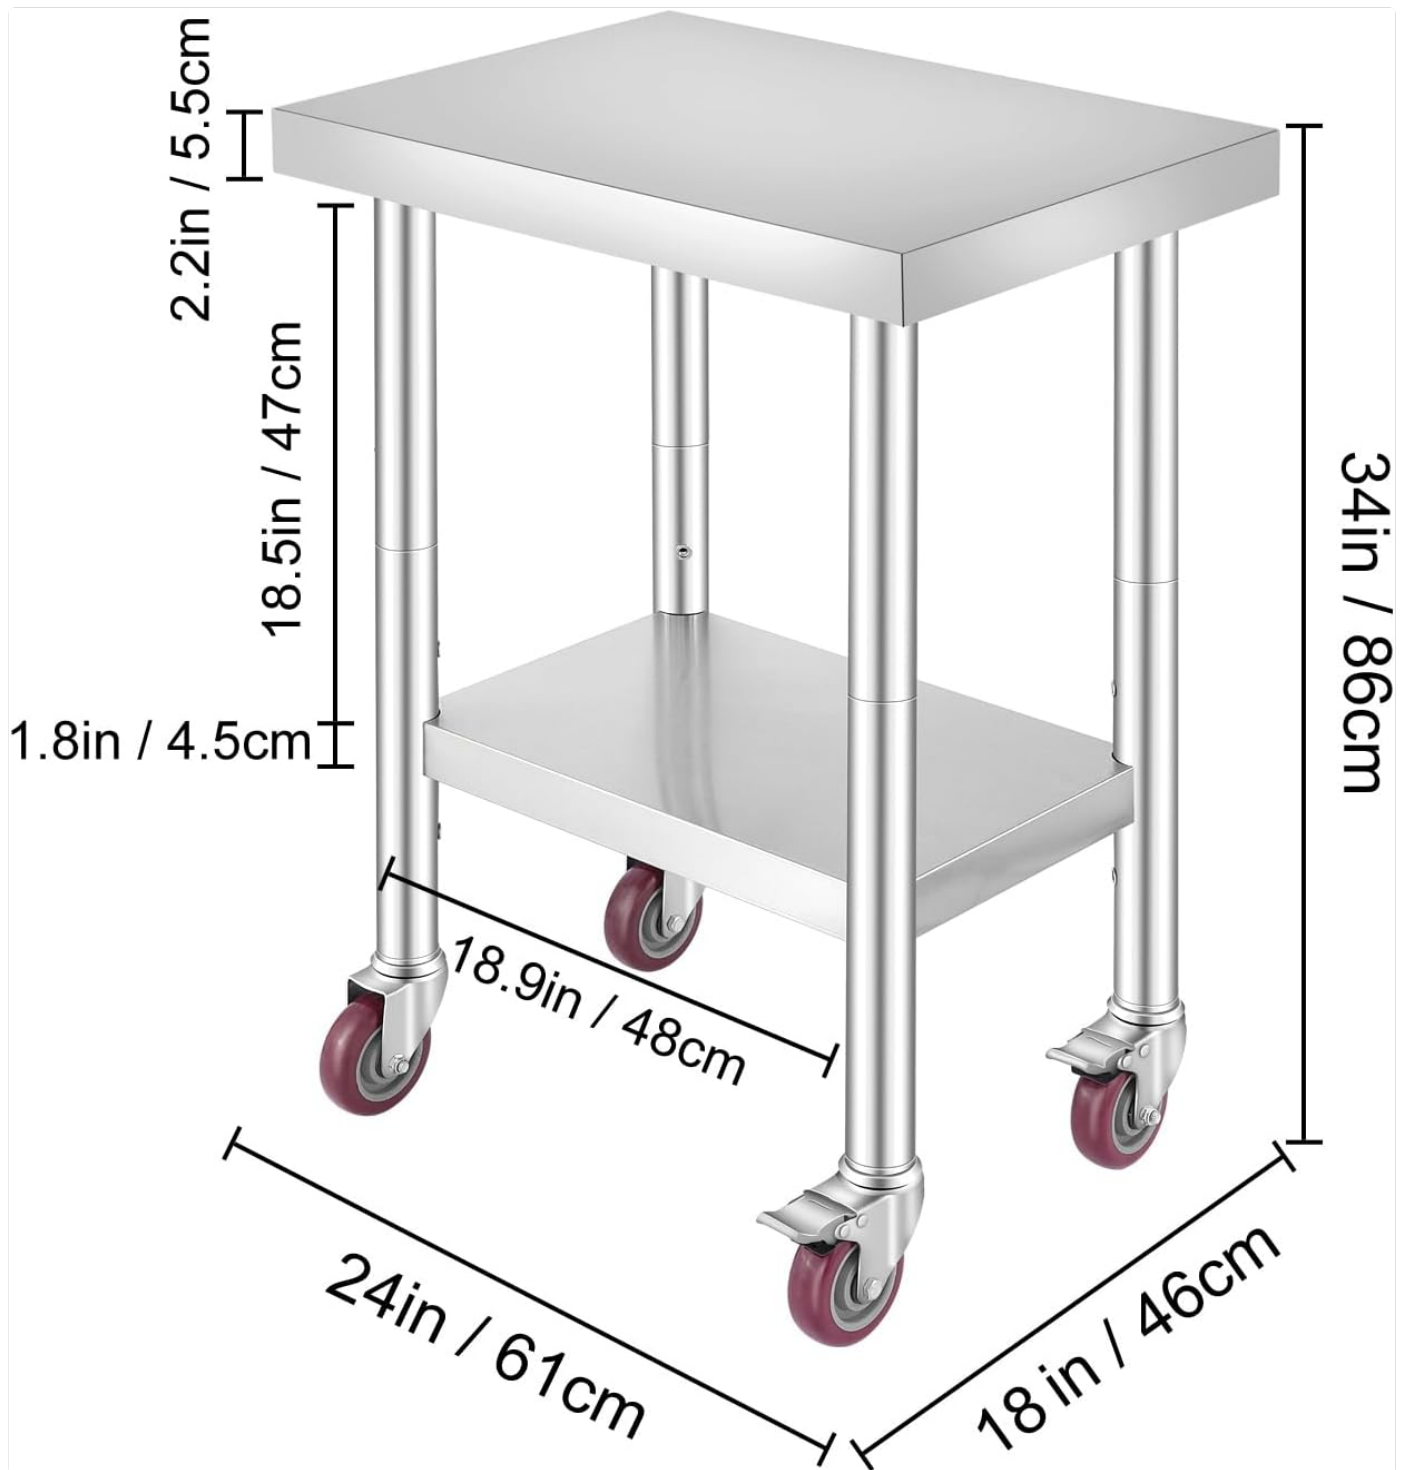


Image: Detailed product specifications including dimensions and weight.

- **Model:** GZT61*45*85
- **Material:** SUS201 Stainless Steel (Tabletop, Undershell, Legs)
- **Product Dimensions (L x W x H):** 24 x 18 x 34 inches (610 x 450 x 860 mm)
- **Product Weight:** 19 lbs (8.6 kg)
- **Total Load Capacity:** 700 lbs (317.5 kg)
- **Upper Shelf Load Capacity:** 400 lbs (181 kg)
- **Lower Shelf Load Capacity:** 300 lbs (136 kg)
- **Height Adjustment:** 3 Levels for undershell
- **Casters:** 4 Swivel Casters (2 with locking brakes)

9. WARRANTY AND CUSTOMER SUPPORT

Happybuy products are designed for durability and performance. For warranty information, technical assistance, or any questions regarding your product, please contact Happybuy customer support through the retailer's platform or visit the official Happybuy website.

Please have your model number (GZT61*45*85) and purchase date available when contacting support.

