

[Manuals.plus](#) /

› [DotMod](#) /

› DotMod Official dotAIO [V3] Replacement Tank User Manual

DotMod dotmod_dotaiov3replacementtank

DotMod Official dotAIO [V3] Replacement Tank User Manual

Brand: DotMod | **Model:** dotAIO V3 Replacement Tank

1. INTRODUCTION

Thank you for choosing the DotMod dotAIO [V3] Replacement Tank. This tank is specifically designed to enhance your vaping experience with the DotMod dotAIO V2 device. It features an improved airflow adjustment mechanism and is perfect as a primary or spare tank. Please read this manual carefully before use to ensure proper operation and maintenance.

2. SAFETY INFORMATION

Please observe the following safety precautions to prevent damage to the device or personal injury:

- The dotAIO device and its components are precision instruments. Avoid strong external impacts or dropping the device.
- Do not expose the tank or device to excessive water or moisture. Water ingress can cause malfunctions.
- If the device or tank becomes abnormally hot during use, discontinue use immediately and allow it to cool down.
- Keep out of reach of children and pets.
- Use only with compatible DotMod dotAIO V2 Coils.

3. PACKAGE CONTENTS

Your DotMod dotAIO [V3] Replacement Tank package should contain the following:

- 1 x DotMod dotAIO V3 Replacement Tank

Note: Coils are not included with the replacement tank and must be purchased separately.

4. PRODUCT OVERVIEW

The dotAIO V3 Replacement Tank features an updated design for improved performance and user experience. It maintains compatibility with dotAIO V2 coils, ensuring a seamless transition for existing users.




DotMod dotAIO V3 Replacement Tank in Limited Blue, showcasing the transparent tank section and the 'OPEN' indicator for refilling.

The tank is available in three distinct colors to match your personal style:



Three DotMod dotAIO V3 Replacement Tanks in Black, Clear, and Limited Blue, illustrating the available color options.

The V3 tank introduces subtle but significant improvements over its predecessor, the V2 tank, particularly in its airflow adjustment mechanism.

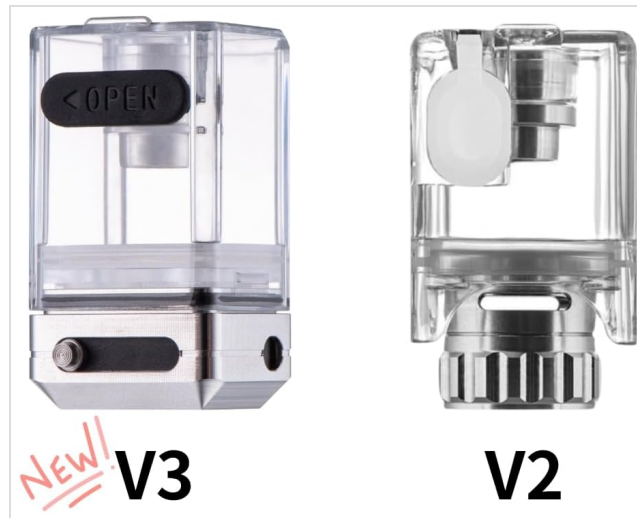

Comparison of the DotMod dotAIO V3 Replacement Tank (left) and the V2 Tank (right), highlighting design differences and the 'NEW! V3' label.

5. SETUP

Follow these steps to set up your DotMod dotAIO V3 Replacement Tank:

1. **Install Coil:** If not already installed, insert a compatible DotMod dotAIO V2 coil into the base of the V3 tank. Ensure it is seated firmly.
2. **Fill Tank:** Locate the fill port on the tank (usually marked with 'OPEN' or a similar indicator). Open the silicone plug and carefully fill the tank with your preferred e-liquid. Do not overfill.
3. **Close Fill Port:** Securely close the silicone plug to prevent leaks.
4. **Prime Coil (Important):** After filling, allow the tank to sit upright for at least 5-10 minutes. This allows the e-liquid to fully saturate the coil's wicking material, preventing dry hits and extending coil life.
5. **Insert Tank into Device:** Carefully insert the filled and primed tank into your DotMod dotAIO V2 device. Ensure it clicks securely into place.

6. OPERATING INSTRUCTIONS

Once the tank is set up and installed in your DotMod dotAIO V2 device, operate it according to your device's specific instructions. The V3 tank integrates seamlessly with the device's existing functions.

- **Airflow Adjustment:** The V3 tank features an updated airflow adjustment mechanism. Rotate the airflow control ring at the base of the tank to customize your draw from tight to airy.
- **Refilling:** When e-liquid levels are low, follow the 'Fill Tank' step from the Setup section to refill.

7. MAINTENANCE

Regular maintenance will ensure the longevity and optimal performance of your DotMod dotAIO V3 Replacement Tank:

- **Cleaning:** Periodically remove the tank from the device. Disassemble the tank (if possible) and rinse components with warm water. Allow all parts to dry completely before reassembly and reuse. Do not use harsh chemicals or abrasive materials.
- **Coil Replacement:** Replace coils regularly, typically every 1-2 weeks, or when you notice a burnt taste or reduced vapor production. Refer to your coil's specific instructions for replacement.
- **O-Ring Inspection:** Check the O-rings for any signs of wear or damage. Damaged O-rings can lead to leaks. Replace them if necessary.

8. TROUBLESHOOTING

If you encounter issues with your DotMod dotAIO V3 Replacement Tank, consider the following common solutions:

- **Leaking:**
 - Ensure the coil is properly seated.
 - Check all O-rings for damage or misalignment.
 - Ensure the fill port plug is securely closed.
 - Avoid overfilling the tank.
- **Burnt Taste:**
 - The coil may need to be replaced.
 - Ensure the coil was properly primed before first use.
 - Check e-liquid level; do not vape on an empty tank.
- **No Vapor/Poor Vapor Production:**
 - Ensure the tank is correctly installed in the device.
 - Check if the coil is properly installed and making contact.
 - The coil may need to be replaced.

If problems persist, please contact customer support.

9. SPECIFICATIONS

Feature	Detail
Brand	DotMod
Model Name	dotAIO V3 Replacement Tank
Manufacturer Reference	dotmod_dotaiov3replacementtank
Item Dimensions (LxWxH)	20 x 10 x 28 mm
Tank Volume	2 milliliters
Compatible Coils	dotAIO V2 Coils
Available Colors	Black, Clear, Limited Blue

10. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the official DotMod website or contact your authorized retailer. Keep your purchase receipt as proof of purchase.

For further assistance or inquiries, please visit the [BeyondVapeJapan store on Amazon](#).