

Loniko K1-1-WS

Loniko K1 Smart One-Piece Bidet Toilet User Manual

Brand: Loniko | Model: K1-1-WS

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Loniko K1 Smart One-Piece Bidet Toilet. Please read this manual thoroughly before installation and use to ensure proper function and safety. Keep this manual for future reference.

2. SAFETY INFORMATION

Always adhere to the following safety precautions to prevent injury or damage to the product:

- Ensure the power supply is disconnected before any installation or maintenance.
- Do not immerse the product in water or spray water directly onto electrical components. The unit is IPX4 rated for splash resistance, but not for submersion.
- Only use the product for its intended purpose as a bidet toilet.
- Keep children and individuals with reduced physical, sensory, or mental capabilities away from the product unless supervised.
- Do not attempt to repair or modify the product yourself. Contact customer service for assistance.
- Ensure proper grounding for electrical connections.



Figure 2.1: The Loniko K1 Smart Bidet Toilet features an IPX4 waterproof rating, providing protection against splashing water.

3. PRODUCT OVERVIEW AND FEATURES

The Loniko K1 Smart One-Piece Bidet Toilet integrates advanced technology for enhanced hygiene and comfort. Key features include:

- **Smart Dual-Flush & Water-Saving Technology:** Tankless siphonic system with 0.64 GPF for half-flush and 1.28 GPF for full-flush. Features foot-sensing, one-touch button, remote control, and auto-flush.
- **Advanced Foam Shield Protection:** Creates a protective foam barrier to prevent splashes and reduce cleaning frequency.
- **Diverse Cleaning Modes:** Includes hip cleaning, moving cleaning, massage cleaning, and feminine cleaning.
- **Multiple Temperature Adjustments:** Adjustable tankless thermostatic heated seat (Normal/93°F/99°F/104°F), warm air drying (Normal/95°F/113°F/131°F), and cleaning water temperature (Normal/93°F/99°F/104°F).
- **Intelligent Control System:** All functions controllable via wireless remote and a rotating one-touch button.
- **Radar Sensing Technology:** Automatic lid opening upon approach and closing after use. Kick sensor for lid/seat control. Seat detection activates functions.
- **Advanced LCD Display and Night Illumination:** Real-time dynamic display shows function status. Colorful LED lights provide illumination for nighttime use.
- **Safety and Assurance:** Constructed with a high-quality ceramic base and flame-retardant ABS material cover, featuring waterproof, leak-proof, dry burning, high-temperature, and pressure protection.



Figure 3.1: Front view of the Loniko K1 Smart One-Piece Bidet Toilet.



Figure 3.2: Overview of Loniko K1 Smart Bidet Toilet features.

4. SETUP AND INSTALLATION

The Loniko K1 Smart Bidet Toilet is designed for straightforward installation. It is recommended that two people perform the installation. All necessary installation accessories, instructions, and a flange kit are included.

4.1. Included Components

Verify that all the following components are present in your package:

- Toilet Unit
- Remote Control
- Wax Ring
- Angle Valves
- Flange
- Widen Baby Seating (Auxiliary)
- Screws and Fasteners
- Aroma Tablets
- User Manual
- Battery for Remote Control



Figure 4.1: Contents included in the Loniko K1 Smart Bidet Toilet package.

4.2. Pre-Installation Checks

1. Ensure the water supply valve is turned off.
2. Verify that the sewage outlet is at least 12 inches from the wall.
3. Confirm that a grounded electrical outlet is available near the installation area.

4.3. Installation Steps (Summary)

For detailed step-by-step instructions, refer to the dedicated installation guide included in your package.

1. Prepare the floor flange and ensure the area is clean.
2. Install the wax ring onto the toilet's base.
3. Carefully position the toilet over the floor flange, aligning the bolts.

- Secure the toilet to the floor using the provided screws and fasteners.
- Connect the water supply line to the angle valve and the toilet.
- Connect the power cord to a grounded electrical outlet.
- Turn on the water supply and check for leaks.
- Perform an initial flush to ensure proper operation.

5. OPERATING INSTRUCTIONS

The Loniko K1 Smart Bidet Toilet offers various intelligent functions for a personalized experience.

5.1. Automatic Functions

- Auto Open/Close:** The lid automatically opens when you approach the toilet and closes after use.
- Foot Sensor:** A foot sensor allows for hands-free opening and closing of the lid and seat.
- Seat Detection:** Functions such as seat heating and bidet operations are activated upon sensing a user seated.
- Auto-Flush:** The toilet automatically flushes when you leave the seat (if seated for more than 30 seconds).

Auto open & Close

Auto open on approach



Figure 5.1: Automatic lid and flushing operations.



Figure 5.2: Usage scenarios for automatic functions.

5.2. Flushing Operations

The toilet features a dual-flush system and multiple activation methods:

- **Half-Flush (0.64 GPF):** Activated by foot sensor or when seated for less than 30 seconds.
- **Full-Flush (1.28 GPF):** Automatically triggered when seated for more than 30 seconds and then leaving the seat.
- **Manual Flush:** Use the one-touch button or remote control for manual flushing.



Figure 5.3: The powerful 360-degree super vortex siphonic flushing system.

5.3. Bidet Cleaning Modes

Select from various cleaning modes using the remote control or the one-touch knob:

- **Hip Cleaning:** Standard posterior wash.
- **Moving Cleaning:** The water column moves back and forth for broader coverage.
- **Massage Cleaning:** Provides a pulsating water stream for a relaxing effect.
- **Feminine Cleaning:** Gentle front wash for women.

- **Baby Cleaning Mode:** Available with the auxiliary baby seating, activated via the remote control.

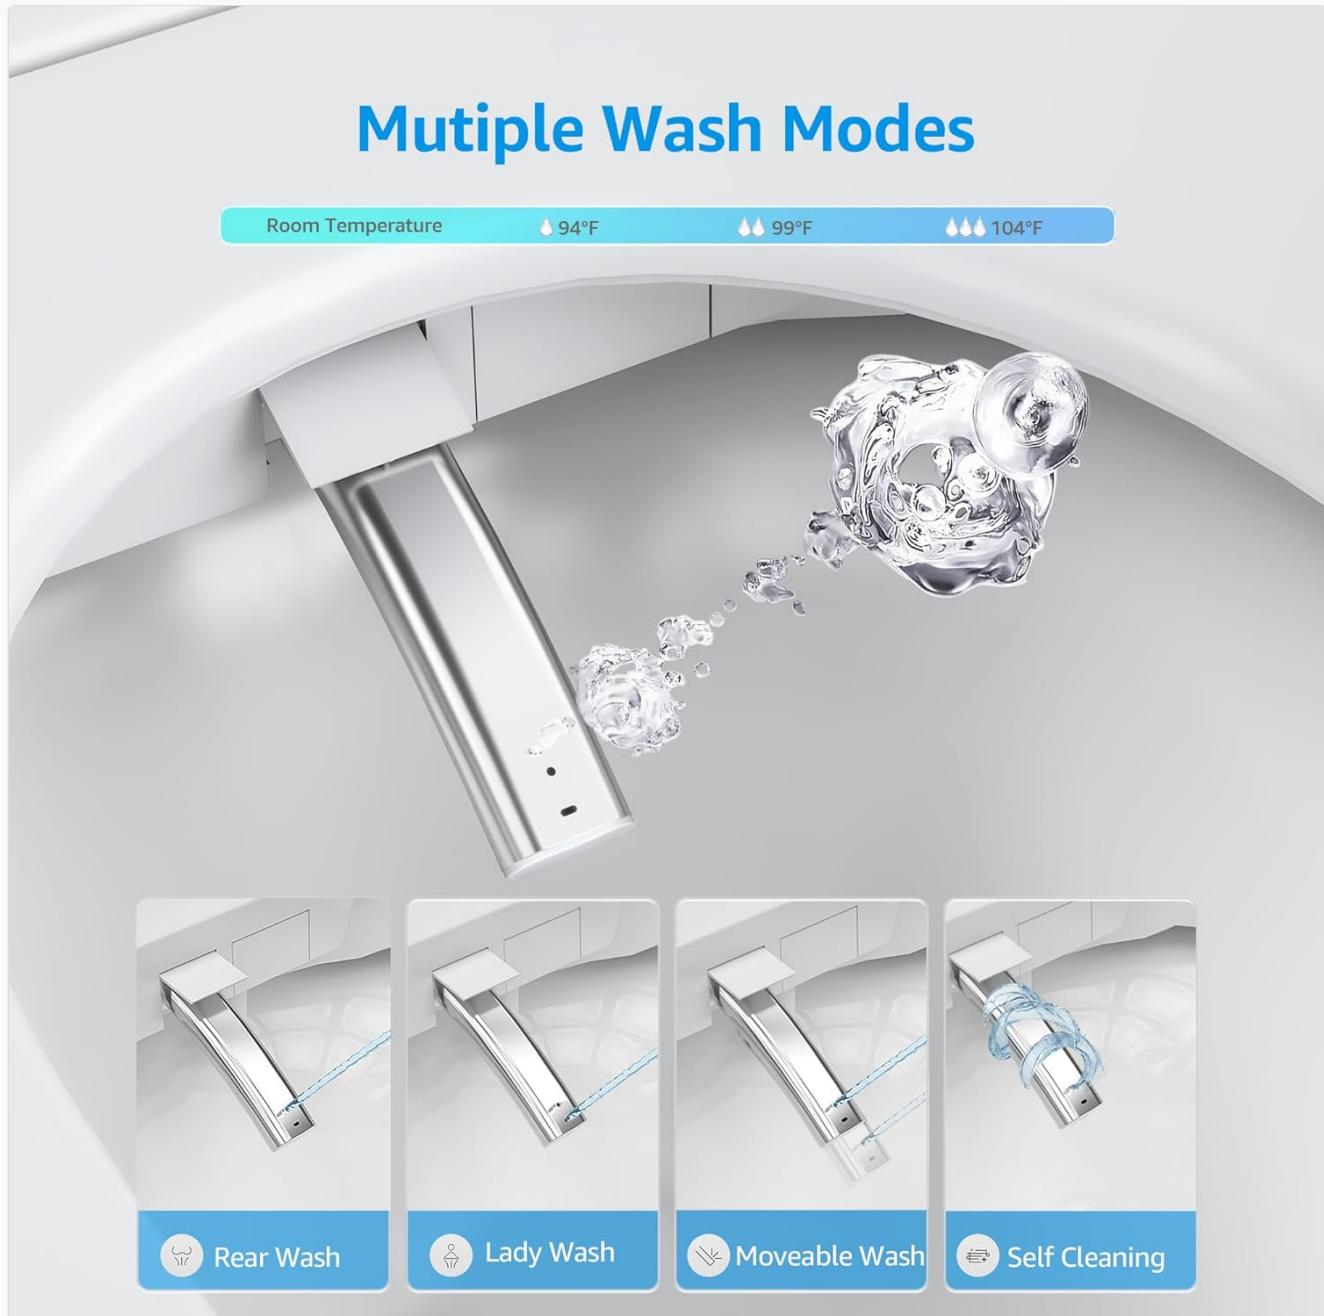


Figure 5.4: Multiple bidet wash modes.



Figure 5.5: Rear and front wash functions.

5.4. Temperature Adjustments

Customize your comfort with adjustable temperatures for the seat, water, and air dryer:

- **Heated Seat:** Normal, 93°F, 99°F, 104°F.
- **Warm Air Drying:** Normal, 95°F, 113°F, 131°F.
- **Cleaning Water:** Normal, 93°F, 99°F, 104°F.

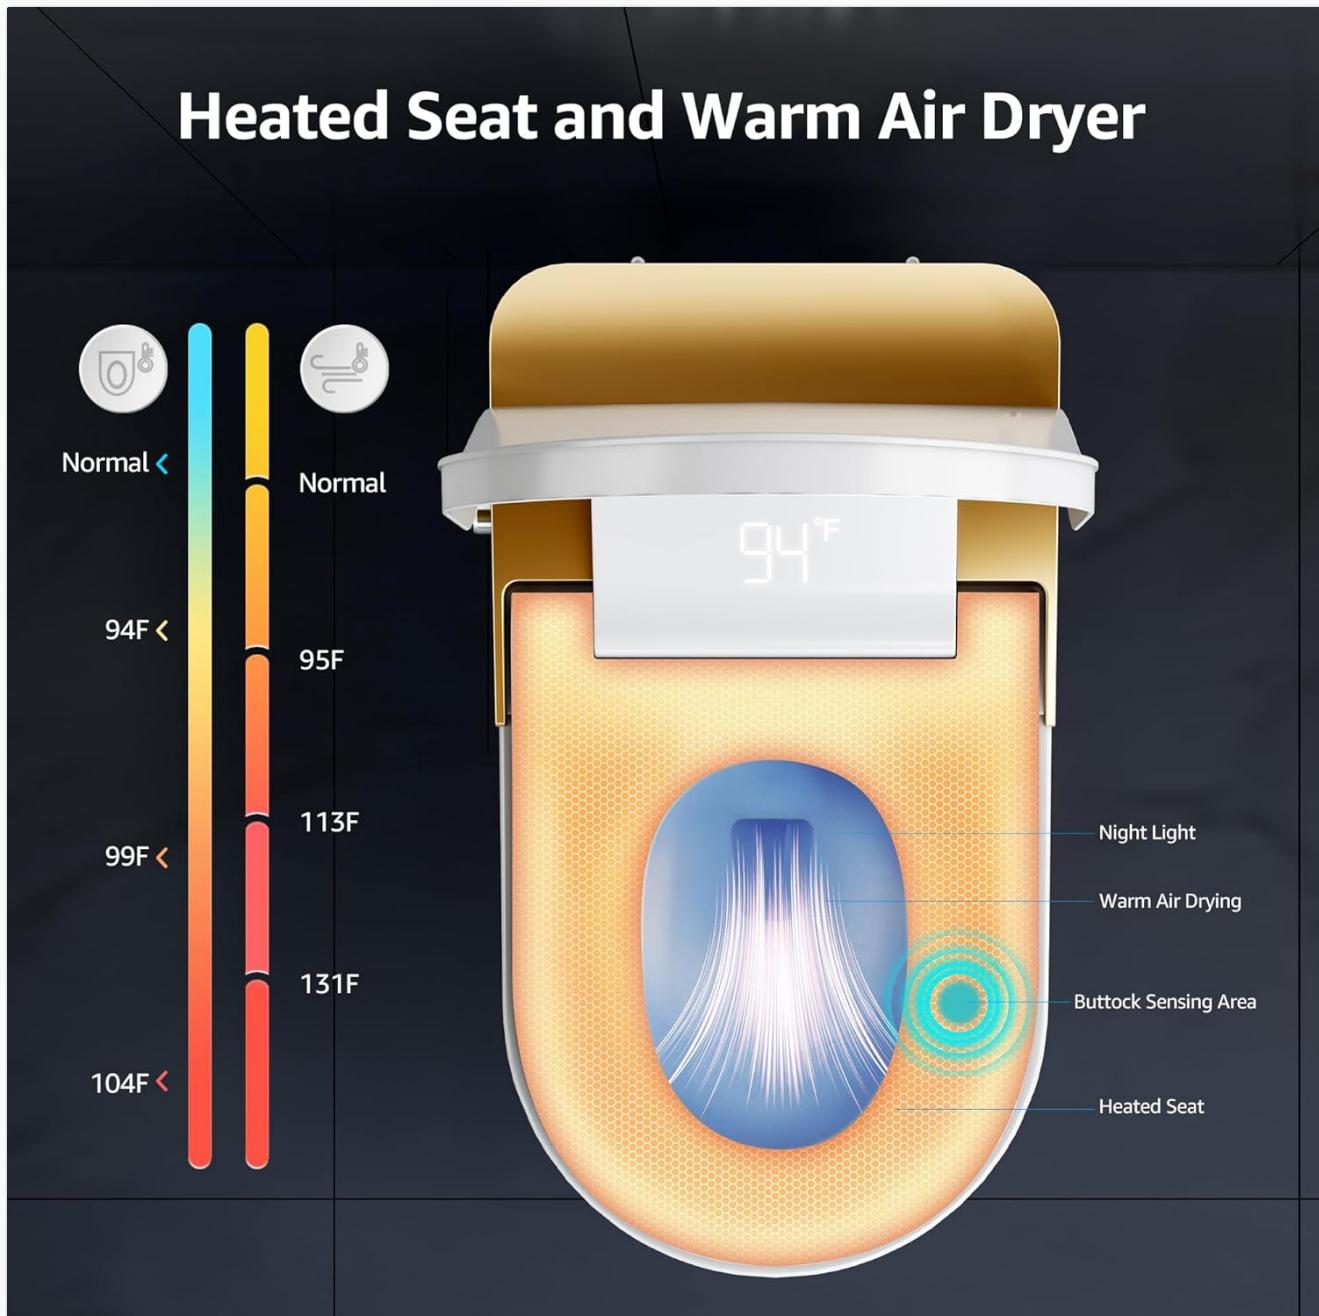


Figure 5.6: Heated seat and warm air dryer functions.



Figure 5.7: Four adjustable heating modes for the seat.

5.5. Control System

Operate all functions using the wireless remote control or the integrated one-touch rotary knob.

- **Remote Control:** Provides full access to all settings and modes.
- **One-Touch Knob:** Rotate for different cleaning modes (e.g., female cleaning, hip cleaning) and press for specific actions.



Figure 5.8: Easy operation via knob and remote control.



Figure 5.9: Detailed view of remote and knob controls.

5.6. Display and Illumination

- **LCD Display:** Shows real-time status of various functions and settings.
- **Night Illumination:** Integrated LED lights provide soft illumination for nighttime use.

6. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your Loniko K1 Smart Bidet Toilet.

6.1. General Cleaning

- Use a soft, damp cloth and mild, non-abrasive cleaner to wipe down the exterior surfaces.
- Avoid harsh chemicals or abrasive pads that could damage the finish.
- For the ceramic base, standard toilet bowl cleaners can be used, but avoid contact with electronic components.

6.2. Foam Shield System

The foam shield system requires periodic refilling of the foam solution. Each unit includes enough premium foam solution to last a typical 5-person household over 3 months.

- Refer to the specific instructions in your package for refilling the foam solution reservoir.
- Only use approved foam shield solutions to ensure proper function and prevent damage.

6.3. Self-Cleaning Nozzle

The bidet nozzle features a self-cleaning function. Activate this function regularly to maintain hygiene. The nozzle will extend, rinse itself, and retract.

7. TROUBLESHOOTING

If you encounter any issues with your Loniko K1 Smart Bidet Toilet, please refer to the following common troubleshooting steps. If the problem persists, contact customer service.

7.1. No Power / Functions Not Responding

- Check if the power cord is securely plugged into a grounded outlet.
- Verify that the circuit breaker for the bathroom is not tripped.
- Ensure the remote control batteries are not depleted and are inserted correctly.

7.2. Foot Sensor Not Working

- Ensure the sensor area is clean and unobstructed.
- Confirm that you are within the detection range of the sensor.
- If the issue persists, a system reset (unplugging and replugging the unit) may resolve it.

7.3. Flushing Issues

- Check the water supply valve to ensure it is fully open.
- Ensure there are no obstructions in the toilet bowl or drain.
- If the auto-flush is not working, verify that the seat sensor is clean and functioning.

7.4. Bidet Water Temperature or Pressure Issues

- Check the temperature settings on the remote control or knob.
- Ensure the water supply pressure to the toilet is adequate.
- Clean the bidet nozzle if water flow is weak or inconsistent.

8. SPECIFICATIONS

Detailed technical specifications for the Loniko K1 Smart One-Piece Bidet Toilet:

| Specification | Detail |
|--------------------------------|---|
| Model Number | K1-1-WS |
| Color | K1 Tankless/Auto Flush |
| Product Dimensions (D x W x H) | 27.5"D x 15.7"W x 18.3"H |
| Material | Ceramic (Base), Polypropylene (PP) (Seat) |
| Item Weight | 104 Pounds |
| Installation Type | Floor Mounted |
| Shape | U-Shape |
| UPC | 768771548533 |
| Item Package Quantity | 1 |
| Batteries Required? | No (for main unit, remote control uses batteries) |
| Manufacturer | shenzhenshizhanlanzhijumaoyiyouxiangongsi |

Parameter Description



Figure 8.1: Product dimensions of the Loniko K1 Smart Bidet Toilet.



Figure 8.2: UPC and ETL certifications.

9. WARRANTY AND SUPPORT

Loniko is committed to providing high-quality products and excellent customer service.

9.1. Customer Service

For any questions, concerns, or technical assistance, please contact our customer service team. We aim to provide prompt replies within 12 hours.

Contact information can typically be found on the product packaging or the official Loniko website.

9.2. Warranty Information

Please refer to the warranty card included with your product for specific terms and conditions regarding coverage and duration. Keep your proof of purchase for warranty claims.

© 2025 Loniko. All rights reserved.

Related Documents - K1-1-WS

| | |
|---|--|
|  | <p><u>WOODBRIDGE Toilet + Bidet Seat Installation and Care Guide</u></p> <p>Comprehensive installation, care, maintenance, and troubleshooting guide for the WOODBRIDGE Toilet + Bidet Seat (Model T-0079), including technical specifications and safety instructions.</p> |
|  | <p><u>Casta Diva CD-Y080 Elongated Smart Bidet Toilet Use and Care Manual</u></p> <p>Comprehensive guide for the Casta Diva CD-Y080 Elongated Smart Bidet Tankless Toilet, covering features, operation, safety, and maintenance.</p> |
|  | <p><u>NTQ N-BT-153S-OPT One-Piece Toilet: Dimension Details & Specifications</u></p> <p>Detailed dimension specifications and product overview for the NTQ N-BT-153S-OPT one-piece toilet. Features include comfort height, a soft-closing seat, powerful dual flush (1/1.6 GPF), a ceramic nano-glazed surface, and a full-skirted design. Find measurements for installation and planning.</p> |
|  | <p><u>Alpha Bidet UXT Pearl Smart Toilet Installation and User Manual</u></p> <p>Comprehensive guide for the Alpha Bidet UXT Pearl smart toilet, covering installation, operation, maintenance, and troubleshooting. Features include auto open/close, foot sensor, and advanced cleaning functions.</p> |



[ZEAFIVE ZVBL-137-OPT 1-Piece Toilet Installation Guide & Warranty](#)

Comprehensive installation instructions and warranty details for the ZEAFIVE ZVBL-137-OPT 1-piece dual flush toilet. Learn how to properly install your new toilet.



[ZEAFIVE ZVBL-153S-OPT 1-Piece Toilet Installation Guide](#)

Installation guide for the ZEAFIVE ZVBL-153S-OPT 1-piece, dual-flush, elongated, chair-height toilet with soft-close seat. Includes step-by-step instructions, safety warnings, required tools, and warranty details.