

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Deeyaple](#) /

› [Deeyaple LED Digital Alarm Clock User Manual](#)

Deeyaple CK-LED1306

Deeyaple LED Digital Alarm Clock User Manual


Model: CK-LED1306

Brand: Deeyaple

IMPORTANT SAFETY INFORMATION

WARNING:


- Keep out of reach of children under 14 years old.
- **INGESTION HAZARD:** This product contains a button cell or coin battery. A swallowed button cell or coin battery can cause internal chemical burns and lead to death.
- **KEEP new and used batteries OUT OF REACH OF CHILDREN.**
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

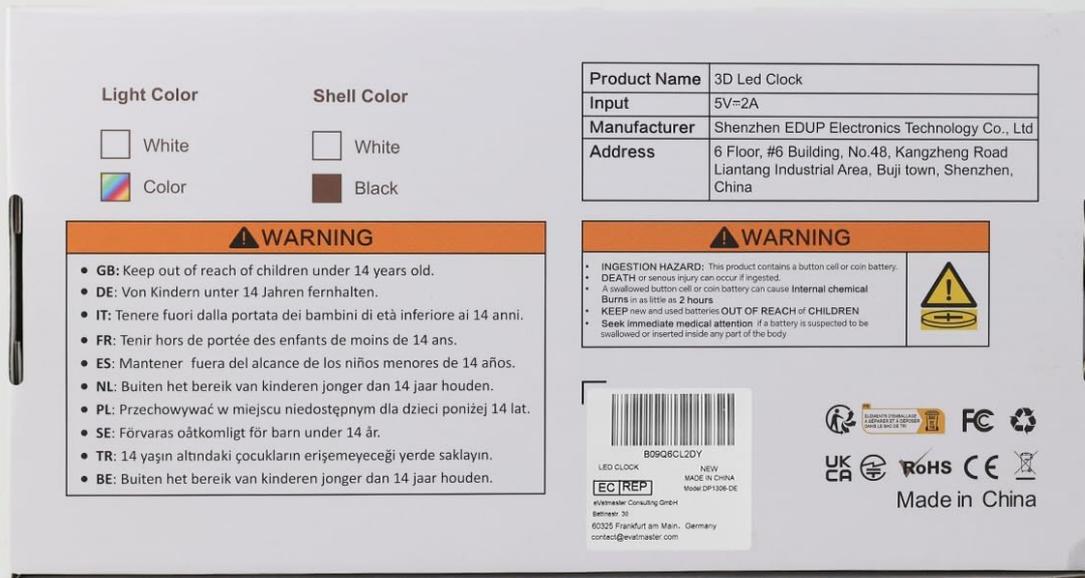


Back of the product packaging, detailing safety warnings and manufacturer information.

PRODUCT OVERVIEW

The Deeyaple LED Digital Alarm Clock is a modern and versatile timekeeping device designed for various indoor settings such as living rooms, kitchens, bedrooms, and offices. It features a large, easy-to-read 3D LED display with adjustable brightness, ensuring visibility day or night. Beyond basic time display, it offers a range of functions including alarm with snooze, date display, and temperature monitoring. The clock can be conveniently operated via a remote control or buttons located on the back.

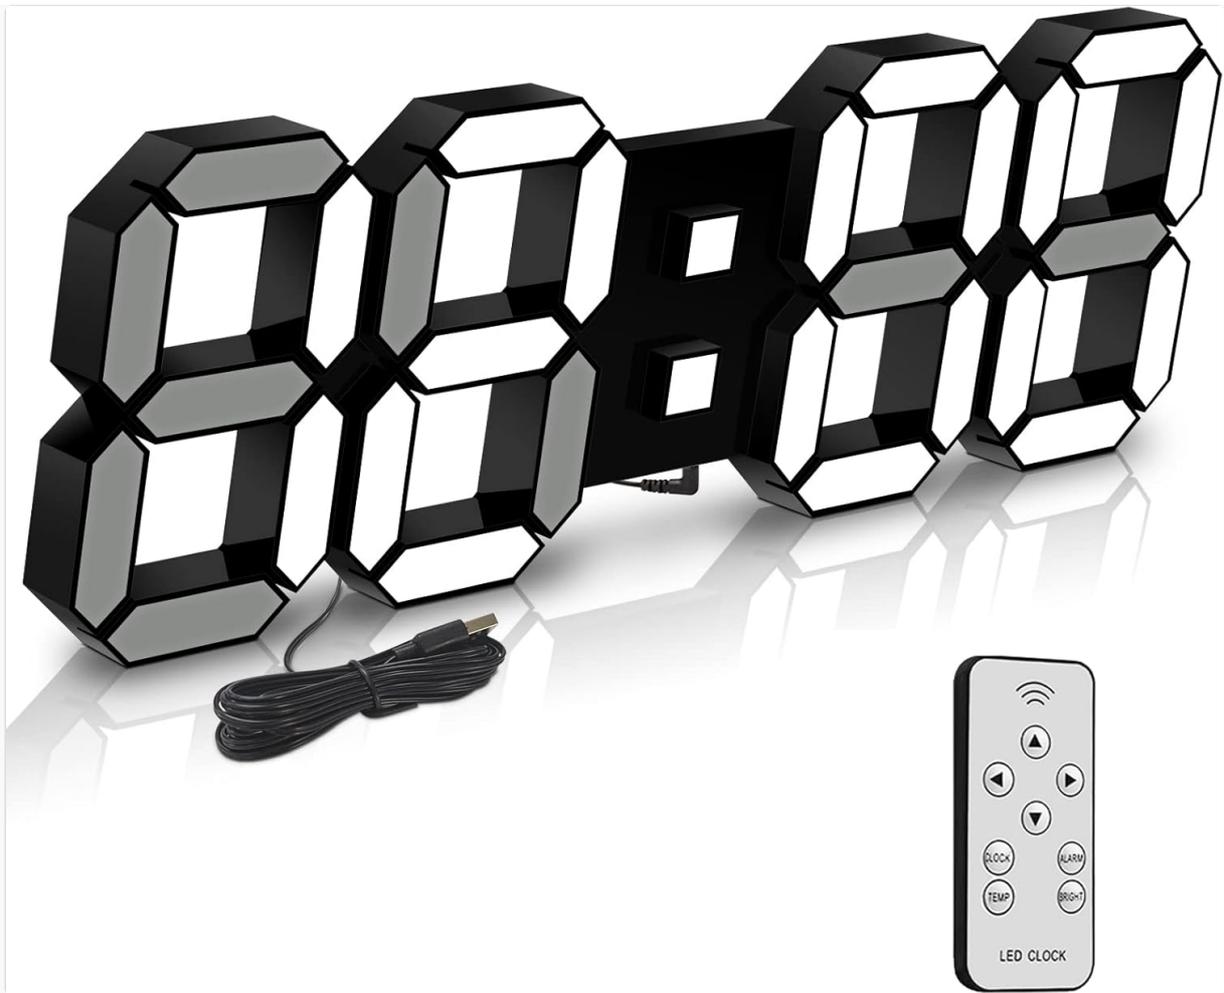

The Deeyaple LED Digital Alarm Clock, showcasing its sleek design, remote control, and USB power cable.

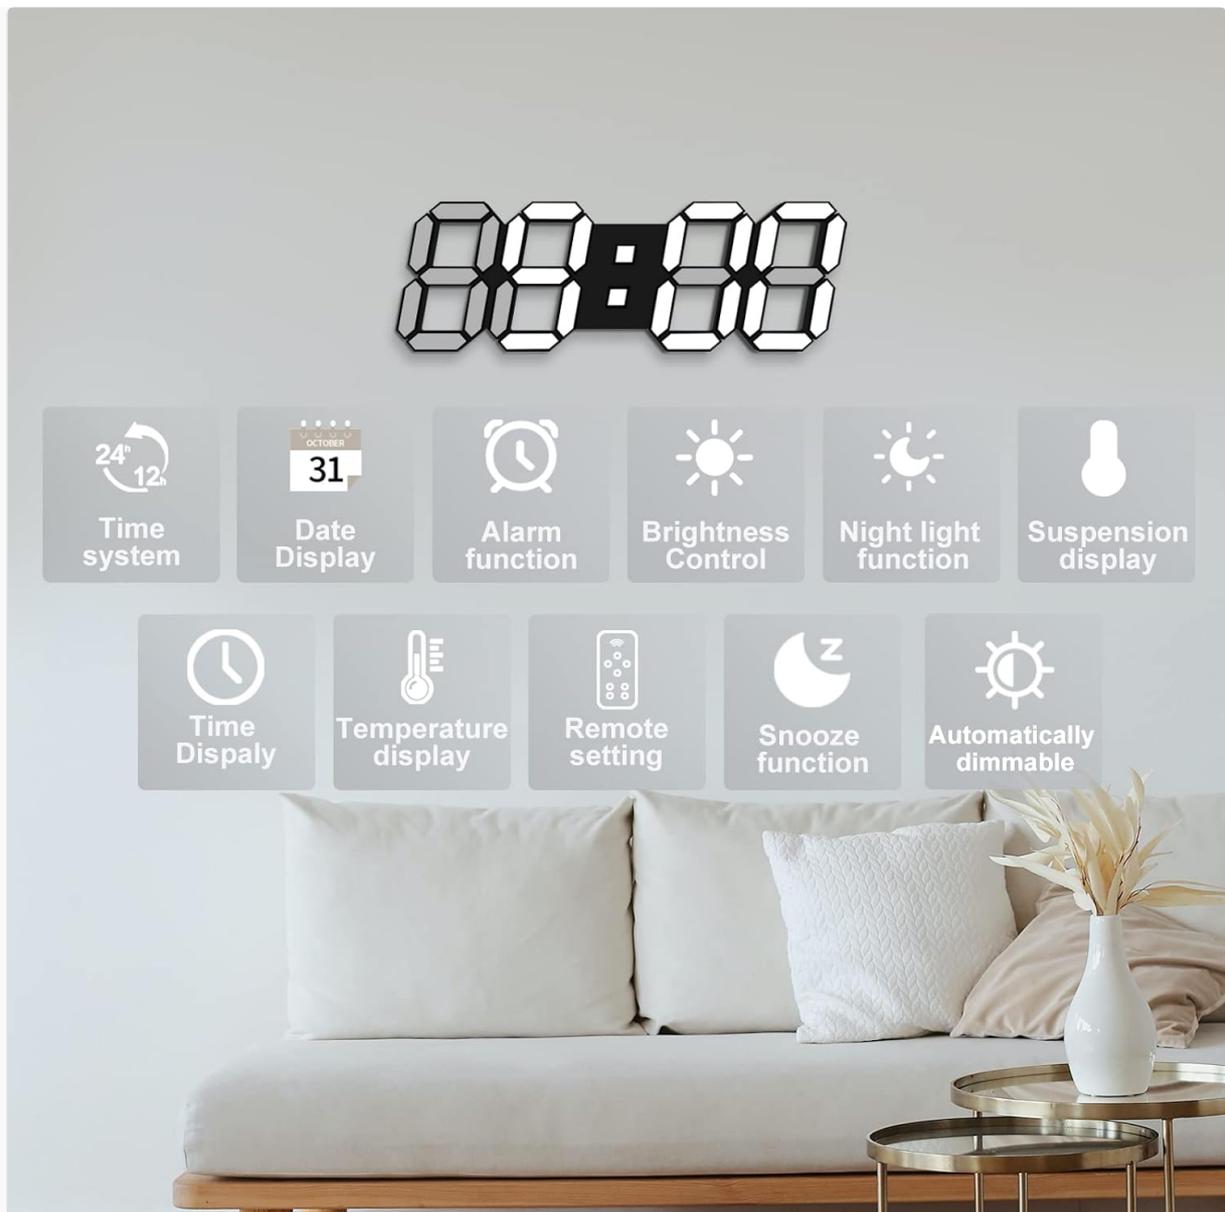

Key features of the Deeyaple LED Digital Alarm Clock, including time, date, temperature, alarm, snooze, and brightness control.

PACKAGE CONTENTS

Please check the package contents upon unboxing to ensure all items are present:

- Deeyaple LED Digital Alarm Clock (1 unit)
- Remote Control (1 unit)
- USB Power Cable (3 meters)
- User Manual (this document)



Contents of the Deeyaple LED Digital Alarm Clock package.

SETUP

Power Connection

1. Connect the USB power cable to the power port located on the back of the clock.
2. Plug the other end of the USB cable into a standard USB power adapter (not included) or a compatible USB port.
3. The clock display will illuminate, indicating it has power.

Memory Function Battery

The clock has a built-in rechargeable battery that retains time, temperature, date, and alarm settings for up to 168 hours (7 days) during a power outage. No manual battery installation is required for this function; it charges automatically when the clock is powered.

OPERATING INSTRUCTIONS

The clock can be operated using either the included remote control or the buttons on the back of the unit.

Setting Time (12/24 Hour Mode)

1. Press the **CLOCK** button on the remote control or the corresponding button on the back of the clock to enter time setting mode.
2. Use the **UP** and **DOWN** arrows on the remote or buttons to adjust the hour.
3. Press **CLOCK** again to move to minutes, then adjust using **UP** and **DOWN**.
4. To switch between 12-hour and 24-hour display modes, press the **12/24H** button (if available on remote) or cycle through options during time setting.
5. Press **CLOCK** to confirm and exit.

Setting Date

1. Press the **DATE** button on the remote or the corresponding button on the back.
2. Adjust the year, month, and day using the **UP** and **DOWN** arrows, pressing **DATE** to move between fields.
3. Press **DATE** to confirm and exit.

Temperature Display

The clock automatically displays the ambient temperature. It cycles through time, date, and temperature by default. You can press the **TEMP** button on the remote to manually switch to temperature display.



Loop Display Mode




The clock's loop display mode, showing time, date, and temperature.

Alarm Setting

1. Press the **ALARM** button on the remote or the corresponding button on the back.
2. Use the **UP** and **DOWN** arrows to set the desired alarm hour.
3. Press **ALARM** again to set the alarm minutes.
4. Press **ALARM** to confirm and activate the alarm. An alarm icon will appear on the display.

Snooze Function

When the alarm sounds, press the **SNOOZE** button on the remote or the designated button on the back of the clock to activate the snooze function. The alarm will temporarily stop and sound again after a set interval (typically 5-9 minutes).

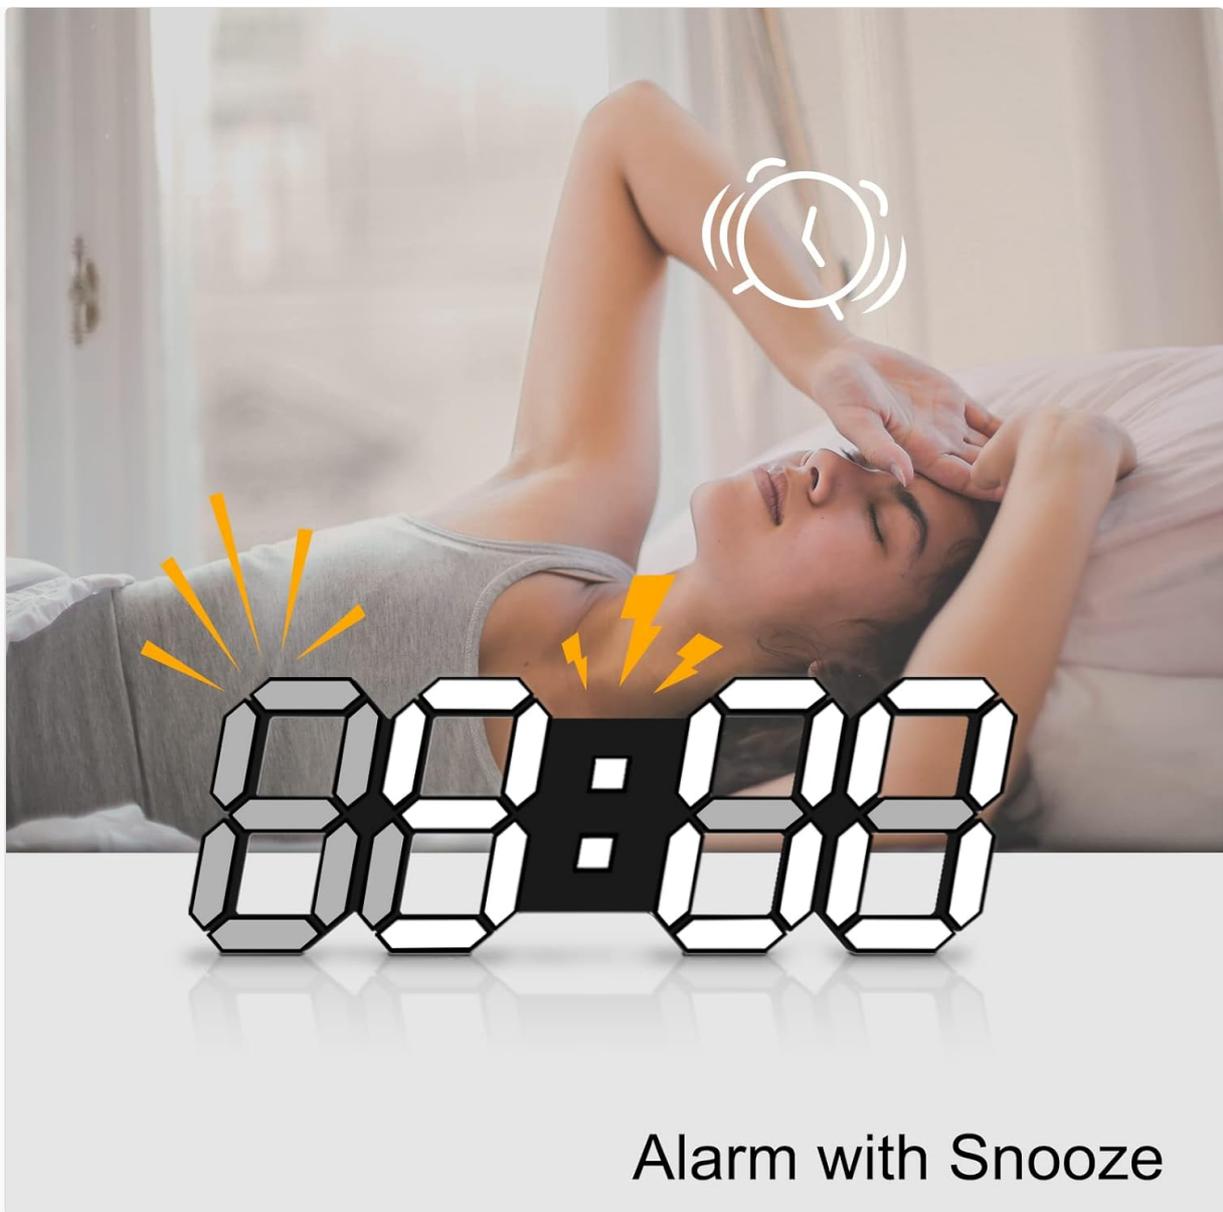

Alarm with Snooze

The alarm with snooze function in action.

Brightness Adjustment

The clock offers multiple brightness levels and an automatic dimming feature.

- **Manual Adjustment:** Press the **BRIGHT** button on the remote control repeatedly to cycle through 3 brightness levels (bright, medium, dim) and an off state.
- **Automatic Dimming:** The clock is equipped with a light sensor that can automatically adjust the display brightness based on ambient light conditions. This feature ensures optimal visibility without being too bright in dark environments.

Auto-dimming/Manual Adjustable Brightness

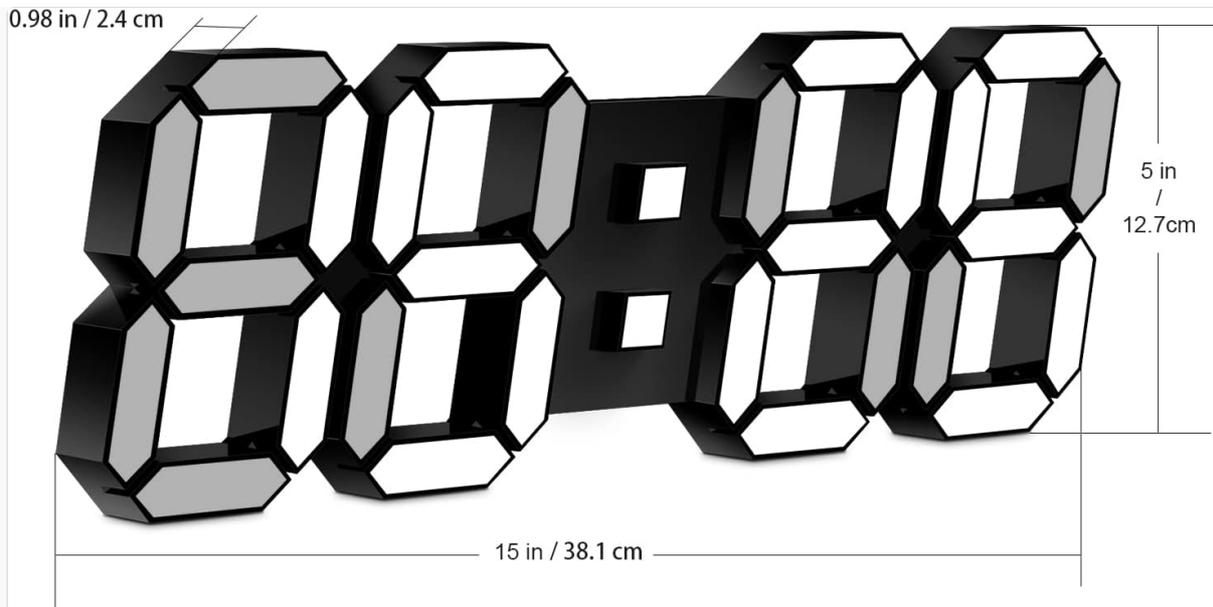


Illustration of the clock's auto-dimming and manual adjustable brightness levels.


MOUNTING

The Deeyaple LED Digital Alarm Clock is designed for wall mounting. It features integrated hook holes on the back for easy installation.

1. Identify a suitable location on your wall for mounting.
2. Measure the distance between the two hook holes on the back of the clock.
3. Mark two corresponding points on your wall.
4. Install two screws (not included) into the marked points on the wall, leaving a small portion of the screw head exposed.
5. Carefully align the clock's hook holes with the screws and slide the clock down to secure it in place.



Hook Hole

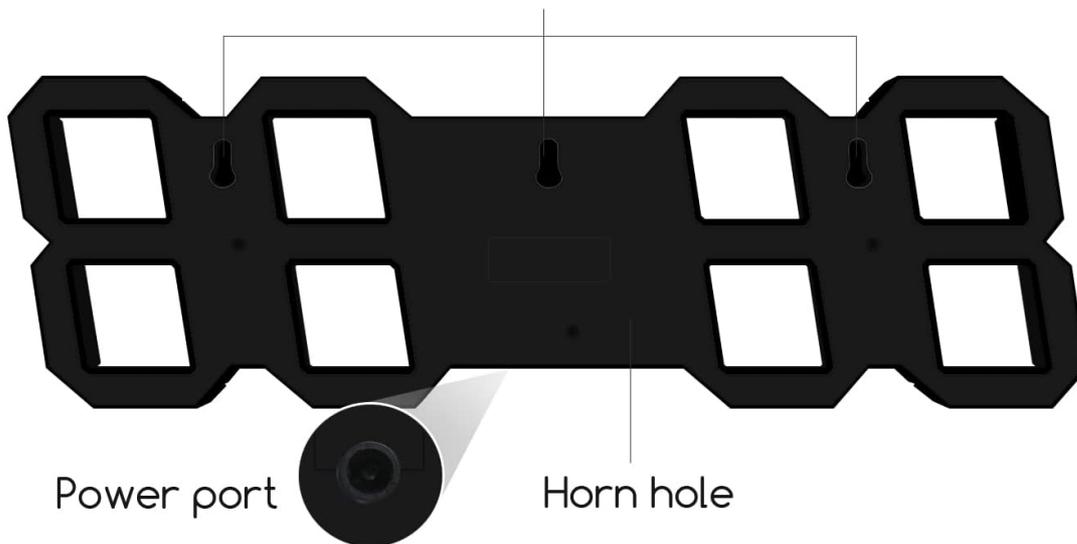

Dimensions and back view of the clock, highlighting the hook holes for wall mounting and the power port.

TROUBLESHOOTING

| Problem | Possible Cause | Solution |
|----------------------------------|--|--|
| Clock not turning on | No power, loose cable connection | Ensure USB cable is securely connected and power adapter is working. Try a different USB port or adapter. |
| Display is too dim or too bright | Incorrect brightness setting, auto-dimming active | Press the BRIGHT button on the remote to cycle through brightness levels. Check ambient light if auto-dimming is enabled. |
| Settings lost after power outage | Extended power outage beyond memory battery capacity | The internal memory battery holds settings for up to 168 hours. If power is off longer, settings may need to be re-entered. |
| Remote control not working | Remote battery low/dead, obstruction, out of range | Replace remote control batteries. Ensure no obstructions between remote and clock. Operate within effective range. |

| Problem | Possible Cause | Solution |
|---|----------------|---|
| LED segments are dim or not lighting up | LED failure | This indicates a potential hardware issue. Contact customer support for assistance. |

SPECIFICATIONS

| | |
|----------------------|--|
| Brand | Deeyaple |
| Model Number | CK-LED1306 |
| Color | Black |
| Display Type | Digital |
| Product Dimensions | 15"W x 5.12"H (38.1 cm W x 13 cm H) |
| Power Source | Corded Electric (USB 5V=2A Input) |
| Mounting Type | Wall Mount |
| Item Weight | 480 Grams (1.06 pounds) |
| Frame Material | Acrylonitrile Butadiene Styrene |
| Special Features | Large Display, Adjustable Brightness, Alarm, Temperature Display, Calendar Display, Snooze, Night Light, Memory Function |
| Internal Battery | Built-in rechargeable Lithium Ion battery for memory function (2 required for operation, not user replaceable) |
| Indoor/Outdoor Usage | Indoor |

WARRANTY AND SUPPORT

Deeyaple products are manufactured with quality and customer satisfaction in mind. For specific warranty details, please refer to the product packaging or contact your retailer.

Manufacturer Information:

Manufacturer: Shenzhen EDUP Electronics Technology Co., Ltd

Address: 6 Floor, #6 Building, No 48, Kangzheng Road, Liantang Industrial Area, Buji town, Shenzhen, China

For technical support or customer service inquiries, please contact your point of purchase or visit the official Deeyaple website for contact information.

