

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Manuals.plus /

› [LUXOAK](#) /

› LUXOAK 8 x 6 ft Resin Storage Shed User Manual

## LUXOAK YSS003

# LUXOAK 8 x 6 ft Resin Storage Shed

Model: YSS003

## 1. IMPORTANT SAFETY INFORMATION

---

Please read and understand all instructions before beginning assembly. Failure to follow these instructions may result in injury or damage to the product.

- Assembly may require two people and careful handling of components.
- Ensure the shed is assembled on a level, stable surface.
- Do not exceed the maximum roof weight capacity of 800 pounds.
- Always wear appropriate safety gear, such as gloves and eye protection, during assembly.
- Keep children and pets away from the assembly area.
- Periodically check all fasteners to ensure they remain tight.

## 2. PRODUCT OVERVIEW

---

The LUXOAK 8 x 6 ft Resin Storage Shed is designed for durable outdoor storage, crafted from premium PP material with stainless steel core reinforcements in the door frame and connecting panels. It offers superior protection against UV rays and rain, making it suitable for various weather conditions.



Image: The LUXOAK 8x6 ft Resin Storage Shed, showcasing its spacious interior and modern design in a garden environment.

Key features include wear-resistant ABS corner protectors, strategically placed drainage outlets to prevent water accumulation, and a robust roof engineered to withstand heavy loads. The shed is equipped with a transparent window and dual ventilation ports for excellent airflow and natural light, reducing humidity and keeping stored items dry and fresh.

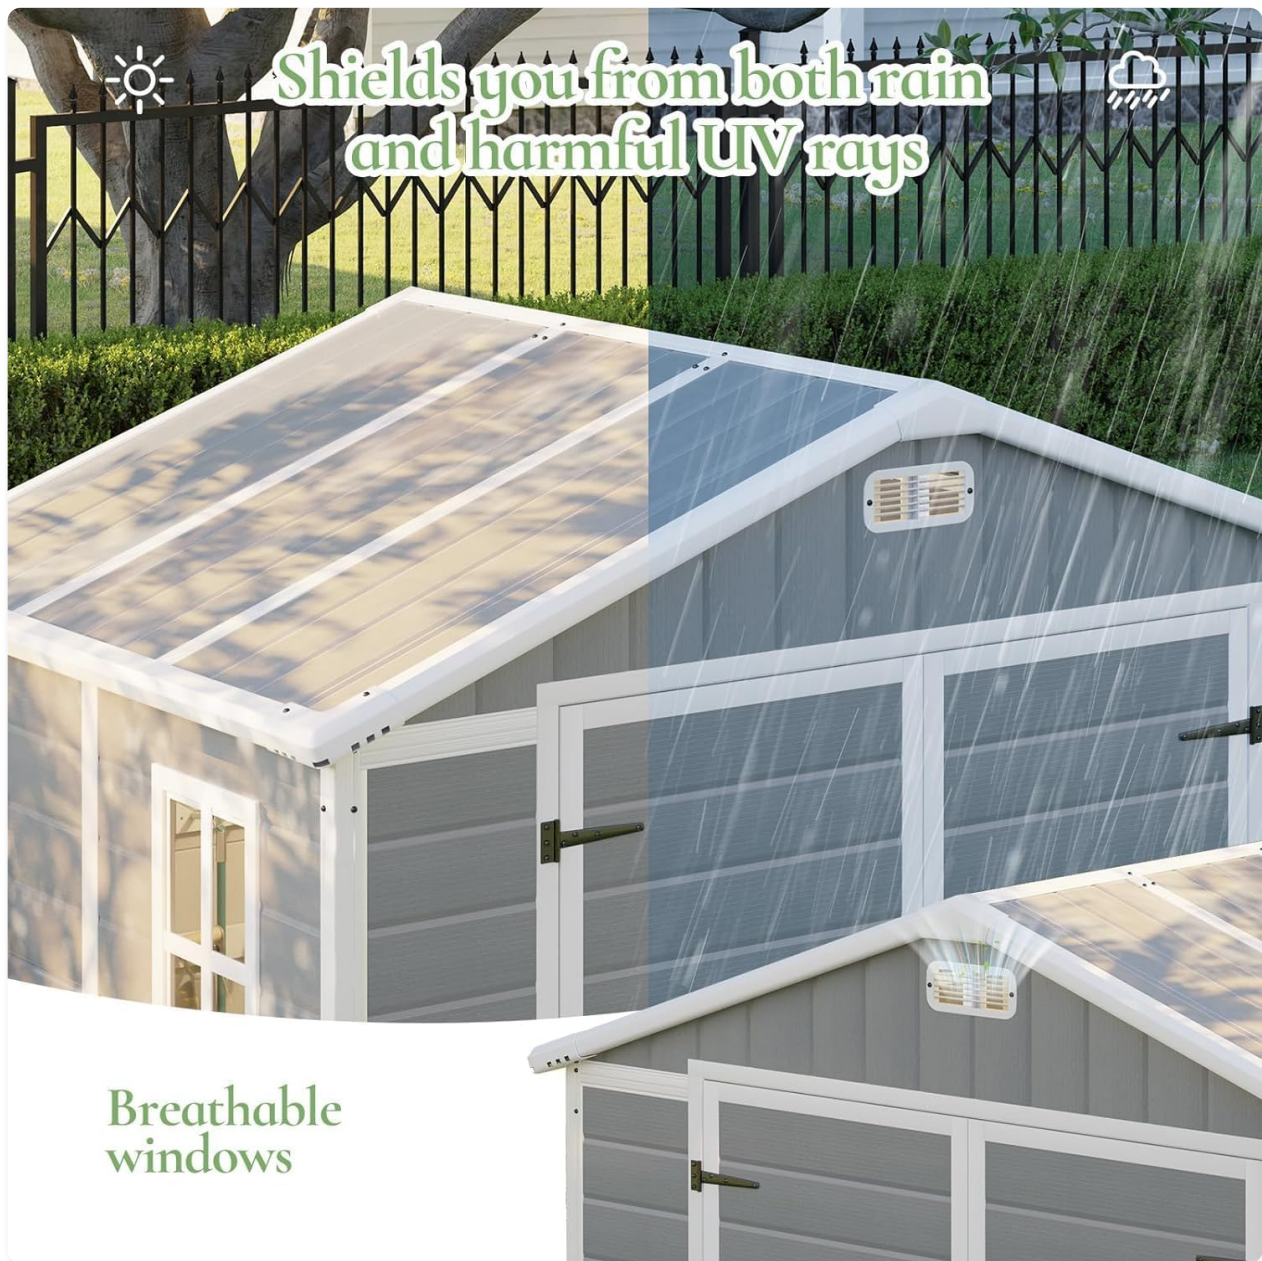


Image: Detail of the shed roof highlighting its resistance to rain and harmful UV rays, along with breathable windows.

With dimensions of 94.88"(L) x 71.3"(W) x 91.34"(H), it provides ample room for lawnmowers, bicycles, or storage racks, making it ideal for use as a storage room, tool shed, or small workshop. For added security, the shed features a stainless steel lock on the door.

# PRODUCT DIMENSIONS

The installation steps are recommended to be done by two people



Image: A detailed diagram illustrating the overall dimensions of the storage shed, including height, width, and depth.

## 3. PACKAGE CONTENTS

Your LUXOAK storage shed package includes all necessary components for assembly. Please verify all parts are present before beginning.

- Floor Panels
- Wall Panels (including window panel)
- Roof Panels
- Door Panels
- Frame Components (vertical and horizontal supports)
- Corner Protectors and Connectors
- Hardware (screws, bolts, nuts)
- Door Hinges and Latch Mechanism
- Ventilation Grilles
- Installation Tools (basic assembly tools)

## 4. ASSEMBLY INSTRUCTIONS

---

This section provides detailed steps for assembling your LUXOAK storage shed. Each part is clearly numbered for straightforward and efficient assembly. It is recommended that two people assemble the shed, which typically takes 2-3 hours.

Your browser does not support the video tag.

Video: Official LUXOAK Resin Storage Shed Assembly Guide. This video provides a visual walkthrough of the entire assembly process.

### 4.1. Floor Assembly

---

Begin by laying out the floor panels (SF1-1, SF1-2) on a level surface. Connect them securely using the designated connectors and screws (Z420, Z410). Ensure all floor sections are tightly joined and the base is stable before proceeding.

### 4.2. Wall Assembly

---

Install the vertical support posts (DP5) into the floor corners. Begin attaching the wall panels (CW2-1, SW1-1, SW1-2) by sliding them into the grooves of the posts and connecting them with appropriate profiles (PPA1, PPA2). Pay close attention to the grain of the wall panels to ensure proper alignment. Secure panels with screws (Z410, Z420) into the internal iron pipes for stability.

### 4.3. Top Assembly

---

Assemble the roof panels (SP6, PP1) by connecting them with the designated profiles (SG2, SS1, SPA4, SR1). Ensure the roof sections are properly aligned and secured with screws (Z410, Z420). Attach the roof support beams (SS5, PS5, PS6) and secure them to the wall structure using screws (Z410, ZW413). Ensure the roof is firmly attached and stable.

### 4.4. Window Assembly

---

Insert the window frame (SG10) into the designated opening in the wall panel. Secure the window components (SG101, SG102) and fasten them with screws (Z410) to ensure a tight and weather-resistant seal.

### 4.5. Door Assembly

---

Assemble the door panels (SD1-1 to SD1-6) by connecting them with the appropriate profiles (SG9, DA1, DA2, DA2L, DA2R). Attach the door hinges (M01) and the latch mechanism (M04) to the door panels and the shed frame using screws (Z410, ZW413). Ensure the doors open and close smoothly and the latch engages securely.

## 5. MAINTENANCE

---

Regular maintenance will prolong the life and appearance of your LUXOAK storage shed.

- **Cleaning:** Clean the shed periodically with mild soap and water. Avoid abrasive cleaners or harsh chemicals that could damage the resin material.
- **Inspection:** Annually inspect all screws, bolts, and connections to ensure they are tight. Re-tighten as necessary.
- **Drainage:** Ensure the drainage outlets at each corner remain clear of debris to prevent water accumulation.
- **Snow Load:** In areas with heavy snowfall, regularly clear snow from the roof to prevent excessive weight.

buildup, which could exceed the 800-pound capacity.

## 6. TROUBLESHOOTING

If you encounter issues during or after assembly, consider the following common solutions:

- **Difficulty with Assembly/Alignment:** Ensure the shed is on a perfectly level surface. Small unevenness can cause significant alignment issues. Double-check part numbers and orientations as per the manual. Some pieces may require gentle force to snap into place.
- **Doors Not Closing Properly:** Verify that the shed base is level and square. Check that all wall panels are fully seated and secured. Adjust hinges or the latch mechanism if necessary.
- **Water Accumulation:** Ensure drainage outlets are clear. Check for any gaps in the roof or wall panel connections and seal if necessary.
- **Missing or Damaged Parts:** If any parts are missing or damaged upon arrival, contact LUXOAK customer service with your product model number and a description of the issue.

## 7. SPECIFICATIONS

Attribute	Value
Brand	LUXOAK
Model Number	YSS003
Color	Gray
Material	Polypropylene, Resin, Stainless Steel
Product Dimensions (L x W x H)	94.88" x 71.3" x 91.34"
Item Weight	120 Pounds
Roof Weight Capacity	800 Pounds
Water Resistance Level	Waterproof
UV Protection	Yes
Assembly Required	Yes

## 8. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the contact details provided with your purchase documentation or visit the official LUXOAK website. Keep your proof of purchase for any warranty claims.