

One Fire 6930007707067


Motion Sensor Light Indoor Rechargeable

USER MANUAL

Brand: One Fire

1. PRODUCT OVERVIEW

The One Fire Motion Sensor Light Indoor Rechargeable is a versatile and energy-efficient lighting solution designed for various indoor spaces. This 3-pack of lights features an upgraded 3.0 PIR motion sensor, providing automatic illumination when motion is detected in low-light conditions. With a built-in 1200mAh rechargeable battery, these lights eliminate the need for disposable AAA batteries, offering up to 180 days of use in AUTO mode on a single charge. They provide 65 lumens of bright, yet eyes-gentle, 3000K natural LED light, making them suitable for stairs, closets, toilets, cabinets, hallways, and children's rooms.

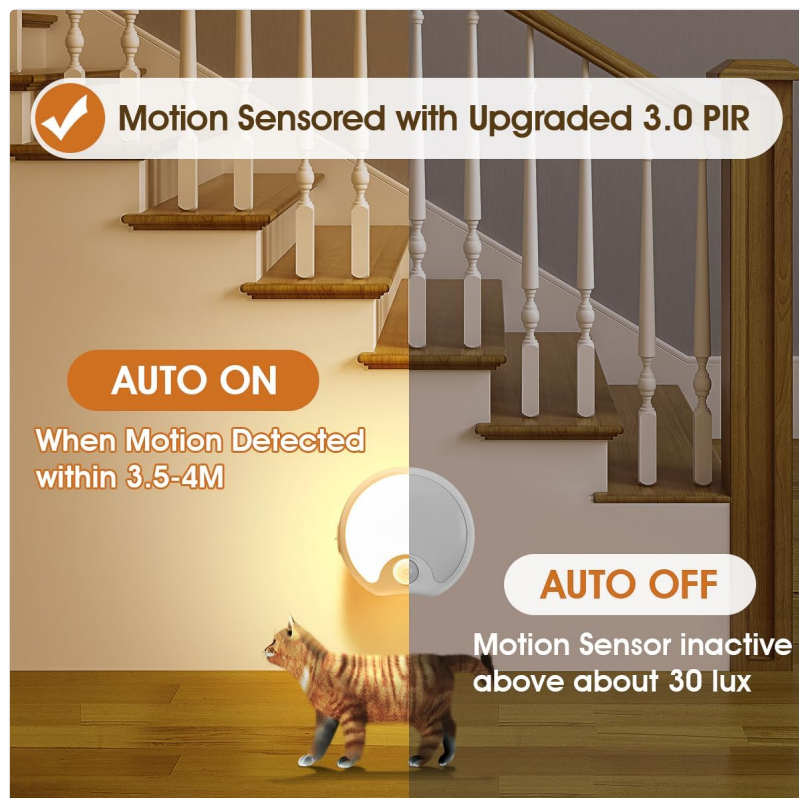

The motion sensor light activates automatically upon detecting movement.

2. WHAT'S IN THE BOX

Your One Fire Motion Sensor Light package includes:

- 3 x Motion Sensor Lights
- 3 x USB Charging Cables
- 3 x 3M Adhesive Tapes (pre-attached or separate)




USB rechargeable design eliminates the need for disposable batteries.

3. SETUP AND INSTALLATION

The One Fire Motion Sensor Light offers two convenient installation methods:

1. **Magnetic Attachment:** The light has a built-in magnet, allowing it to be directly attached to any metal surface (e.g., refrigerators, metal cabinets). This method provides instant installation with no tools required.
2. **Adhesive Mounting:** For non-metallic surfaces, use the included 3M adhesive tape. Simply peel off the protective film from the tape and firmly press the light onto the desired clean, dry surface.

Before first use, it is recommended to fully charge the lights. Connect the provided USB charging cable to the light's charging port and a standard USB power source (e.g., computer, wall adapter). The indicator light will change color (e.g., red to green) when fully charged.

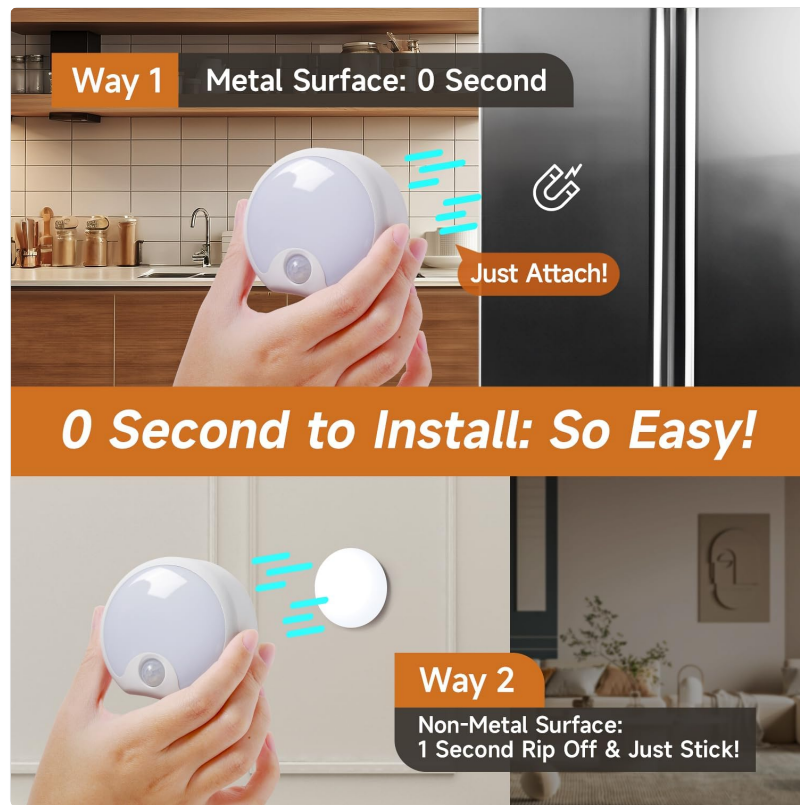

Easy installation with magnetic attachment or 3M adhesive tape.

4. OPERATING MODES

The motion sensor light features three distinct lighting modes, selectable via a switch on the device:

- **Motion Sensor Mode (AUTO):** This is the recommended mode for most applications. The light will automatically turn ON when motion is detected within its range (approximately 3.5-4 meters) in dark environments (below 30 lux). It will automatically turn OFF after 15-30 seconds of no motion.
- **Keep-on Mode (ON):** In this mode, the light remains continuously ON, providing constant illumination. This is suitable for situations where continuous light is desired, such as reading or as a gentle night light for sleeping children.
- **Keep-Off Mode (OFF):** The light remains OFF regardless of motion or ambient light conditions. Use this mode to conserve battery or when light is not needed.




Select from Motion Sensor, Always On, or Off modes.

5. MAINTENANCE

To ensure optimal performance and longevity of your motion sensor lights, follow these maintenance guidelines:

- **Charging:** Recharge the lights using the provided USB cables when the brightness diminishes or the indicator light signals low battery. A full charge typically takes a few hours. Avoid overcharging for extended periods.
- **Cleaning:** Wipe the surface of the lights with a soft, dry cloth. Do not use abrasive cleaners or immerse the lights in water.
- **Storage:** If storing the lights for an extended period, ensure they are fully charged and then store them in a cool, dry place. Recharge them periodically to maintain battery health.

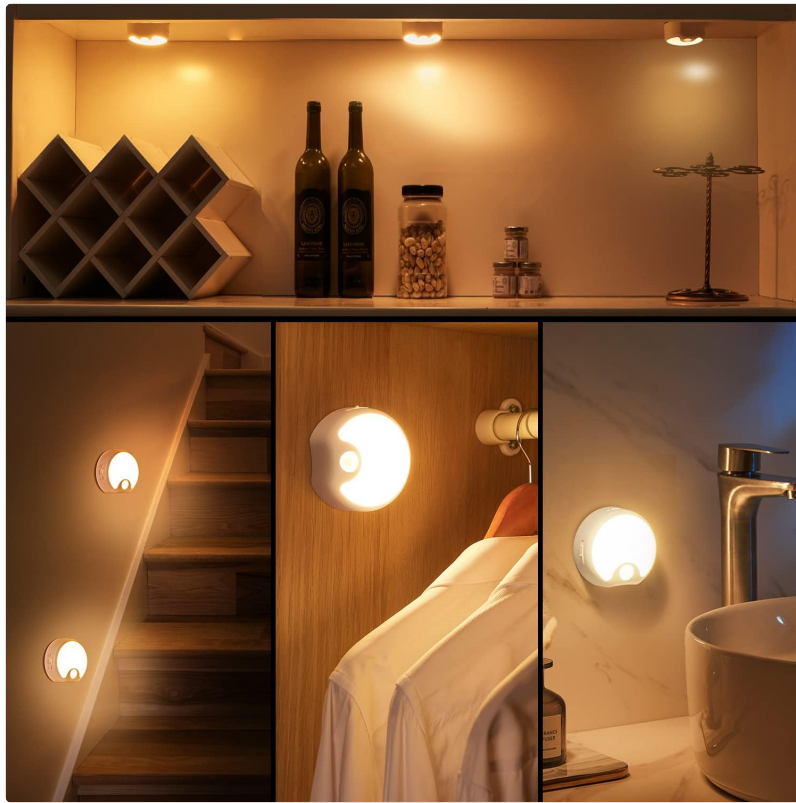

The 65 lumen brightness is sufficient for various tasks, including reading.

6. TROUBLESHOOTING

If you encounter issues with your motion sensor lights, consider the following:

- **Light not turning on in AUTO mode:**
 - Ensure the ambient light is dark enough (below 30 lux). The sensor is designed to prevent activation in bright conditions to save power.
 - Check if the battery is charged. Recharge the light if necessary.
 - Verify the switch is set to 'AUTO' mode.
 - Ensure there is actual motion within the sensor's range (3.5-4 meters, 120-degree angle).
- **Light not turning off:**
 - Check if the switch is set to 'ON' (Keep-on Mode). If so, switch it to 'AUTO' or 'OFF'.
 - Ensure there is no continuous motion within the sensor's range that might be keeping the light activated.
- **Magnet detaching from the light:**
 - While rare, if the magnet detaches, it can often be re-secured with a strong adhesive.
- **Short battery life:**
 - Frequent activation in high-traffic areas will consume battery faster.
 - Ensure the light is fully charged each time.
 - Operating in 'ON' mode will drain the battery much faster than 'AUTO' mode.



Understanding the motion sensor's range and angle can help optimize placement.

7. SPECIFICATIONS

Feature	Specification
Brand	One Fire
Model Number	6930007707067
Color	White
Material	Metal
Product Dimensions	3.8"L x 3.1"W x 3.6"H
Indoor/Outdoor Usage	Indoor
Power Source	Battery Powered (USB Rechargeable)
Special Feature	3 PACK, 65 Lumen Brightness, 1200mAh Built-in Lithium Battery, AUTO ON/OFF with Upgraded Motion Sensor, Easy Installation (Stick It), Suitable for Stairs, Closets, Toilet, Hallway & Everywhere Home
Control Method	Touch (Switch)
Light Source Type	LED
Voltage	5 Volts
Light Color	White (3000K Warm Light)
Number of Items	3
Wattage	1 watts
Brightness	65 Lumen

Water Resistance Level	Not Water Resistant
------------------------------	---------------------

8. WARRANTY & SUPPORT

One Fire provides a **24-month guarantee** for your motion sensor lights. If you encounter any quality problems or have questions regarding the product, please do not hesitate to contact the seller or manufacturer for assistance. They are committed to providing high-quality products and excellent customer service.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Email

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Details

Submit question