

HOROW HR-WT03T

HOROW HR-WT03T Compact Wall Hung Toilet Combo Set Instruction Manual

Model: HR-WT03T

1. PRODUCT OVERVIEW

This manual provides instructions for the HOROW Compact Wall Hung Toilet Combo Set, model HR-WT03T. This set includes a wall-hung toilet bowl, a soft-close toilet seat, a concealed in-wall toilet tank carrier system, a dual-flush plate, and all necessary mounting accessories. The design emphasizes space-saving, modern aesthetics, and efficient flushing.

Package Contents

Upon unpacking, verify that all components are present:

- HR-TG03W Toilet Bowl
- Soft-Close Toilet Seat
- Concealed In-Wall Toilet Tank Carrier System
- Dual-Flush Actuator Plate
- Mounting Accessories
- Installation Instructions




Package Include



Concealed In-Wall Toilet Tank

+

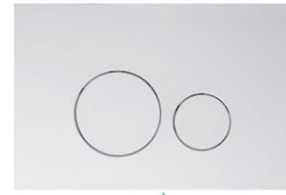


Dual-Flush Actuator Plate



Wall-Hung Toilet

Figure 1: Included Components

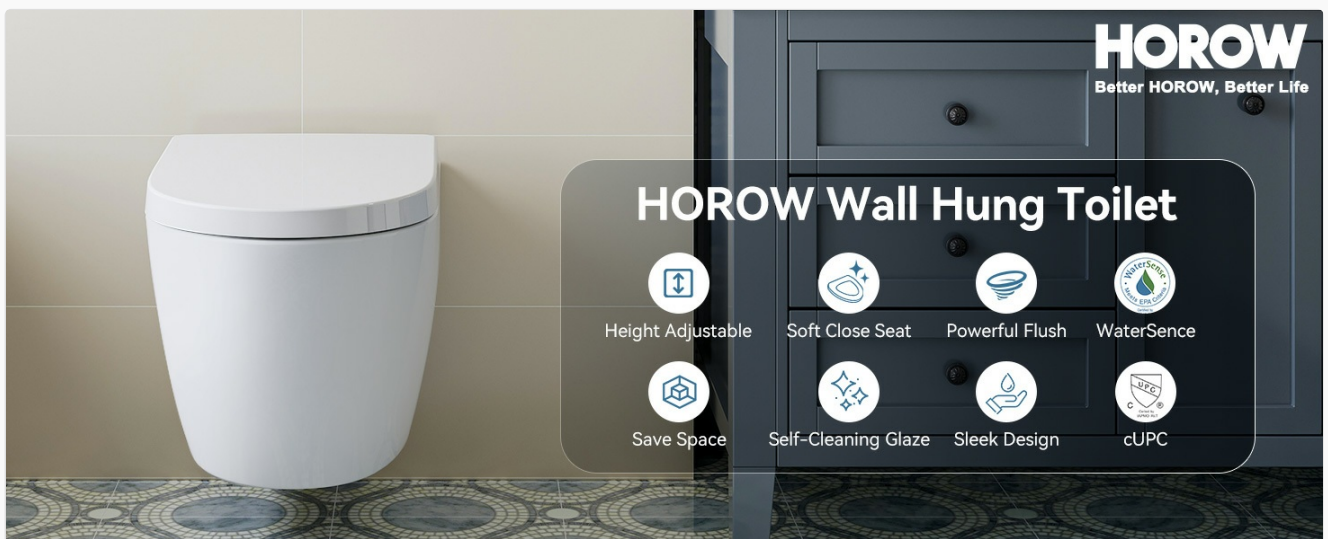

2. SETUP AND INSTALLATION

Installation of the HOROW wall-hung toilet system requires professional plumbing knowledge. It is recommended to consult a qualified plumber for installation to ensure proper function and compliance with local building codes. The concealed tank system is designed for in-wall installation, providing a seamless and space-saving appearance.

Key Installation Features:

- **Adjustable Height:** The toilet bowl's installation height can be adjusted to suit individual preferences and bathroom conditions, ensuring optimal comfort.
- **Concealed Plumbing:** All plumbing is hidden within the wall, contributing to a clean and modern bathroom aesthetic.
- **Secure Mounting:** The carrier system installs directly into wall studs for a stable and secure hold.



Figure 3: Wall Hung Design Overview


In-Wall Toilet Tank



Figure 4: In-Wall Toilet Tank Features


Dimensions for Installation Planning:

Refer to the detailed dimension diagrams for precise installation planning. All dimensions are approximate and may have slight variations. Always measure the actual product before making any cuts or permanent installations.

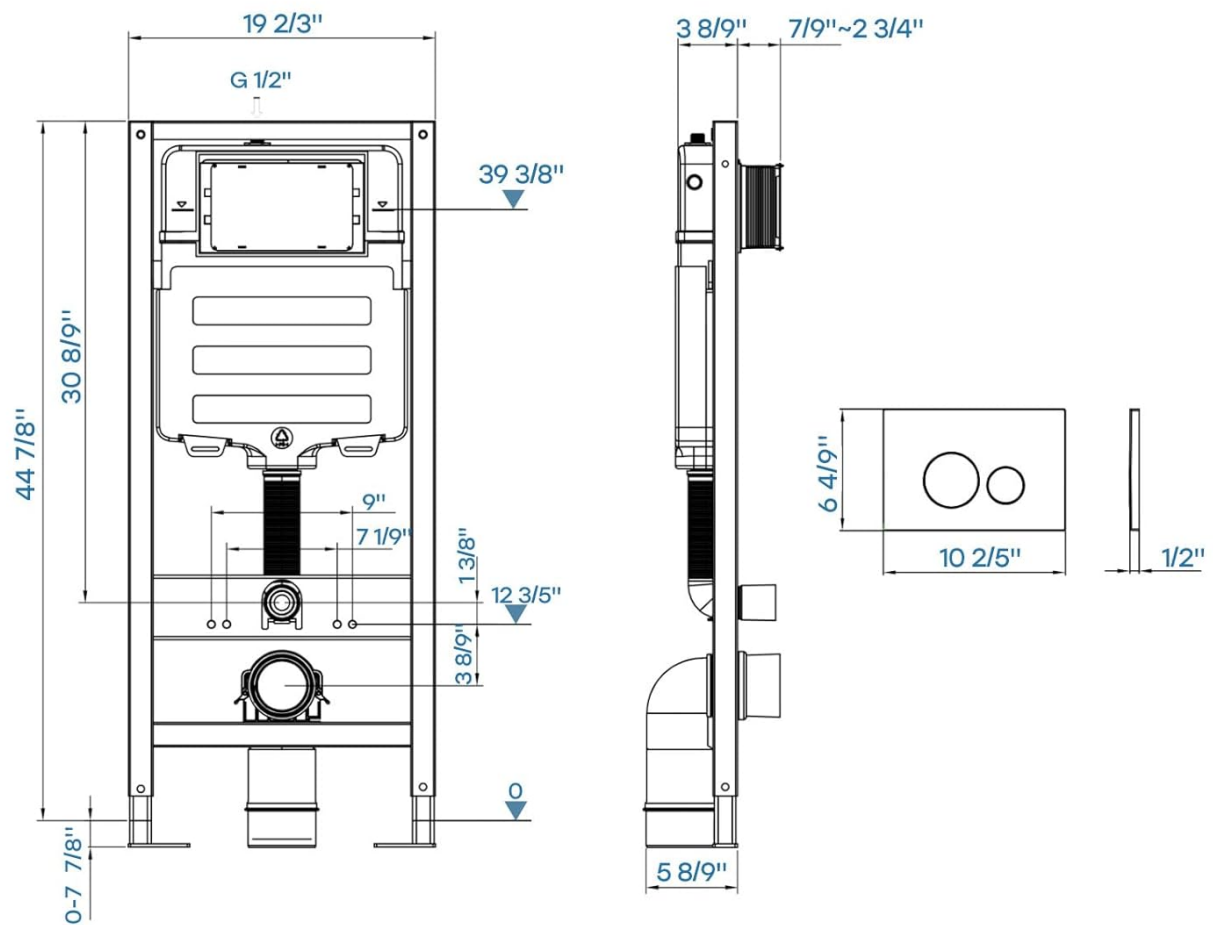

All dimensions are manually measured with certain errors.
Please refer to the received product for specific dimensions

Figure 5: In-Wall Tank Carrier Dimensions

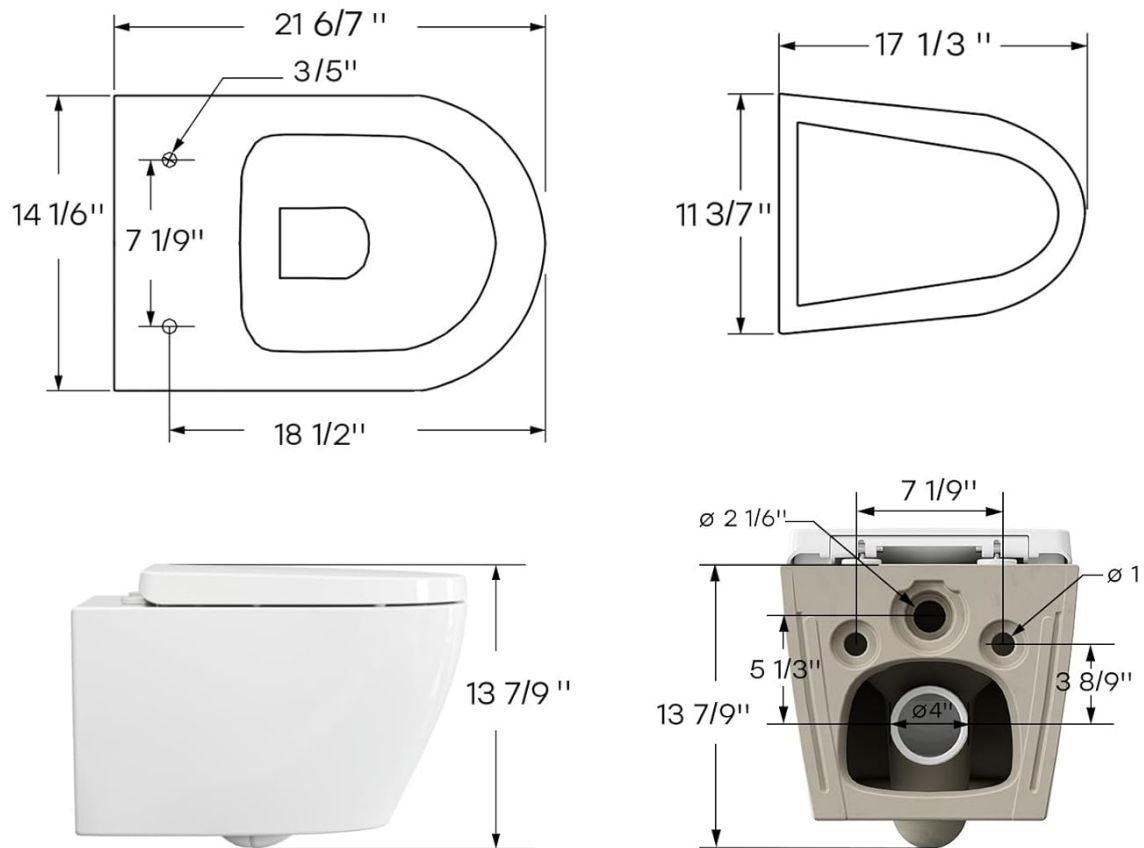

All dimensions are manually measured with certain errors.
Please refer to the received product for specific dimensions

Figure 6: Wall-Hung Toilet Bowl Dimensions

3. OPERATING INSTRUCTIONS

The HOROW wall-hung toilet is designed for user comfort and water efficiency.

Dual Flush System:

The toilet features a dual-flush mechanism, allowing you to choose between two flush volumes to conserve water. The flush plate has two buttons:

- **Small Button:** Activates a 1.1 GPF (Gallons Per Flush) flush for liquid waste, saving water.
- **Large Button:** Activates a 1.6 GPF flush for solid waste, providing powerful cleaning.

The super-swirl flushing system ensures thorough cleaning of the bowl with each flush, preventing clogging.

Soft-Close Seat:

The included toilet seat is equipped with a soft-close mechanism. This feature allows the seat and lid to close slowly and quietly, preventing slamming and reducing wear and tear.

HOROW

Wall Hung Toilet



Figure 7: Toilet Features



Figure 8: Soft-Close Seat in action

4. MAINTENANCE

Regular cleaning and maintenance will ensure the longevity and optimal performance of your HOROW toilet.

Cleaning the Toilet Bowl:

- The toilet bowl features a smooth, non-porous glaze that resists dirt and grime buildup.
- Use a mild, non-abrasive toilet cleaner and a soft brush or cloth. Avoid harsh chemicals or abrasive pads that can damage the glaze.
- The wall-hung design eliminates the base, making it easier to clean the floor underneath and around the toilet, preventing the accumulation of dirt in 'dead corners'.



No Cleaning Dead Corners

Full skirt wall-hung design is convenient to clean and ensures flawless cleaning in every corner



Figure 9: Easy Cleaning with Wall-Hung Design



Figure 10: Easy Clean Glaze

Cleaning the Toilet Seat:

- The toilet seat can be easily removed for thorough cleaning. Gently pull upwards on the seat to detach it from the mounting posts.
- Clean the seat with mild soap and water. Reattach by aligning and pressing down until it clicks into place.



Figure 11: Quick Release Seat Design

5. TROUBLESHOOTING

If you encounter any issues with your HOROW toilet, please refer to the following common troubleshooting tips:

- **Weak Flush:** Ensure the water supply valve to the concealed tank is fully open. Check for any obstructions in the flush mechanism or the toilet bowl's trapway.
- **Continuous Running Water:** This often indicates an issue with the fill valve or flush valve inside the tank. The flush plate can be removed to access the internal components of the concealed tank for inspection.
- **Leaking:** Inspect all connections for tightness. If the leak is from within the tank, it may require professional service.
- **Seat Not Closing Softly:** Check if the soft-close mechanism is obstructed or damaged. Ensure the seat is correctly installed on its mounting posts.

For complex issues or if troubleshooting steps do not resolve the problem, contact HOROW customer service.

6. SPECIFICATIONS

Detailed specifications for the HOROW HR-WT03T Compact Wall Hung Toilet Combo Set:

Feature	Specification
Model Number	HR-WT03T
Product Dimensions	22"D x 14.17"W x 13.77"H
Material	Ceramic (Toilet Bowl), Plastic (Seat)
Item Weight	59.3 Pounds
Installation Type	Wall Mounted
Flush Type	Dual Flush (1.1 GPF / 1.6 GPF)
Included Components	Dual Actuator Plate, Mounting Accessories, Toilet Seat Bolt Kit, Installation Instructions, Soft-Close Toilet Seat, Toilet Tank Carrier, Wall Hung Toilet



Figure 12: Product Specifications Diagram

7. WARRANTY AND SUPPORT

HOROW is committed to customer satisfaction and product quality.

Warranty Information:

This HOROW toilet comes with a **1-year limited warranty** from the date of purchase. Additionally, HOROW provides lifetime after-sales service for its products.

Customer Support:

If you have any questions, require assistance with installation, or need to report a warranty claim, please contact HOROW customer service. Our team aims to respond to all inquiries within 12 hours.

For support, please visit the official HOROW website or refer to the contact information provided with your purchase documentation.

