Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

ANTELA M3su411

ANTELA Smart Power Strip User Manual

Model: M3su411

1. Product Overview

The ANTELA Smart Power Strip is a versatile device designed to provide intelligent control over your electrical appliances. It features four independently controllable AC outlets, two USB-A ports, and one USB-C port, allowing for flexible power management. With energy monitoring capabilities and compatibility with popular voice assistants like Amazon Alexa and Google Home, this power strip enhances convenience and energy efficiency in your home or office.



Figure 1: ANTELA Smart Power Strip and its mobile application interface.



Figure 2: Component breakdown of the Smart Power Strip, highlighting individual control for outlets and combined control for USB ports.

2. Setup Guide

2.1 What's in the Box

- ANTELA Smart Power Strip (Model M3su411)
- User Manual (this document)

2.2 Physical Installation

1. Unpack the ANTELA Smart Power Strip from its packaging.
2. Plug the power strip into a standard wall outlet. Ensure the wall outlet is properly grounded and provides the correct voltage (230 Volts).
3. Place the power strip on a stable, flat surface, away from water and excessive heat.

2.3 App Installation and Connection

1. Download the "Smart Life" or "TUYA Smart" application from your smartphone's app store (available on iOS and Android).
2. Register or log in to your account within the app.
3. Ensure your smartphone is connected to a 2.4 GHz Wi-Fi network. The smart power strip only supports 2.4 GHz Wi-Fi.
4. Open the app and tap "Add Device" or the "+" icon.
5. Select "Power Strip (Wi-Fi)" or similar from the device list.
6. Follow the on-screen instructions to put the power strip into pairing mode (usually by pressing and holding the power button until the indicator light blinks rapidly).
7. Confirm the indicator light is blinking rapidly in the app and enter your Wi-Fi network password.

8. The app will connect to the device. Once connected, you can rename the power strip and its individual outlets/USB ports for easier control.



Figure 3: The Smart Life app interface for controlling the power strip.

3. Operating Instructions

3.1 Individual and Group Control

- The four AC outlets can be controlled independently via the Smart Life/TUYA Smart app.
- The two USB-A ports and one USB-C port are controlled as a single group. They cannot be controlled individually.

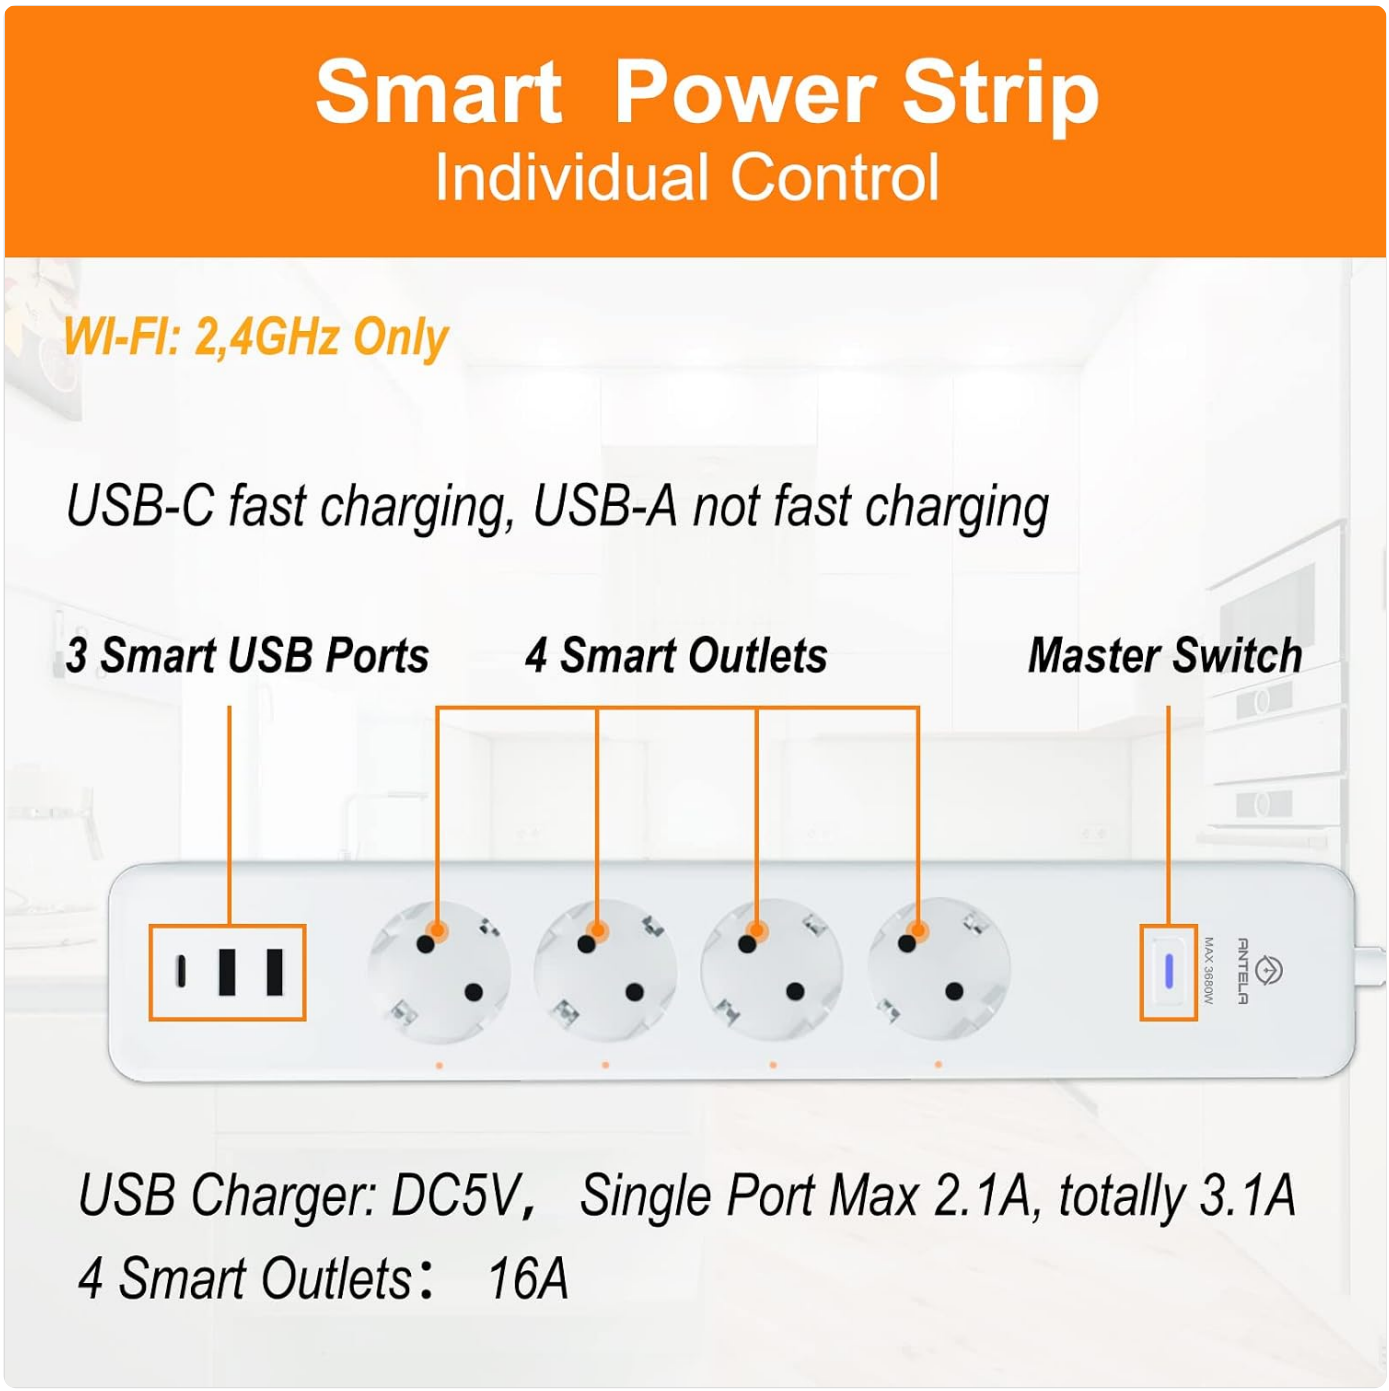


Figure 4: App interface demonstrating individual control of the four AC outlets.

3.2 Remote Control

Once connected to your Wi-Fi network, you can control the smart power strip from anywhere using the Smart Life/TUYA Smart app on your smartphone or tablet. This allows you to turn devices on or off remotely, even when you are away from home.



Figure 5: Remote control functionality via the Smart Life app.

3.3 Voice Control

The ANTELA Smart Power Strip is compatible with Amazon Alexa and Google Assistant. Link the Smart Life/TUYA Smart app to your voice assistant account to enable hands-free control of your connected devices.

- **Example Commands:**
- "Alexa, turn on the living room lamp."
- "Hey Google, turn off the fan."
- "Alexa, turn on the Smart Power Strip."

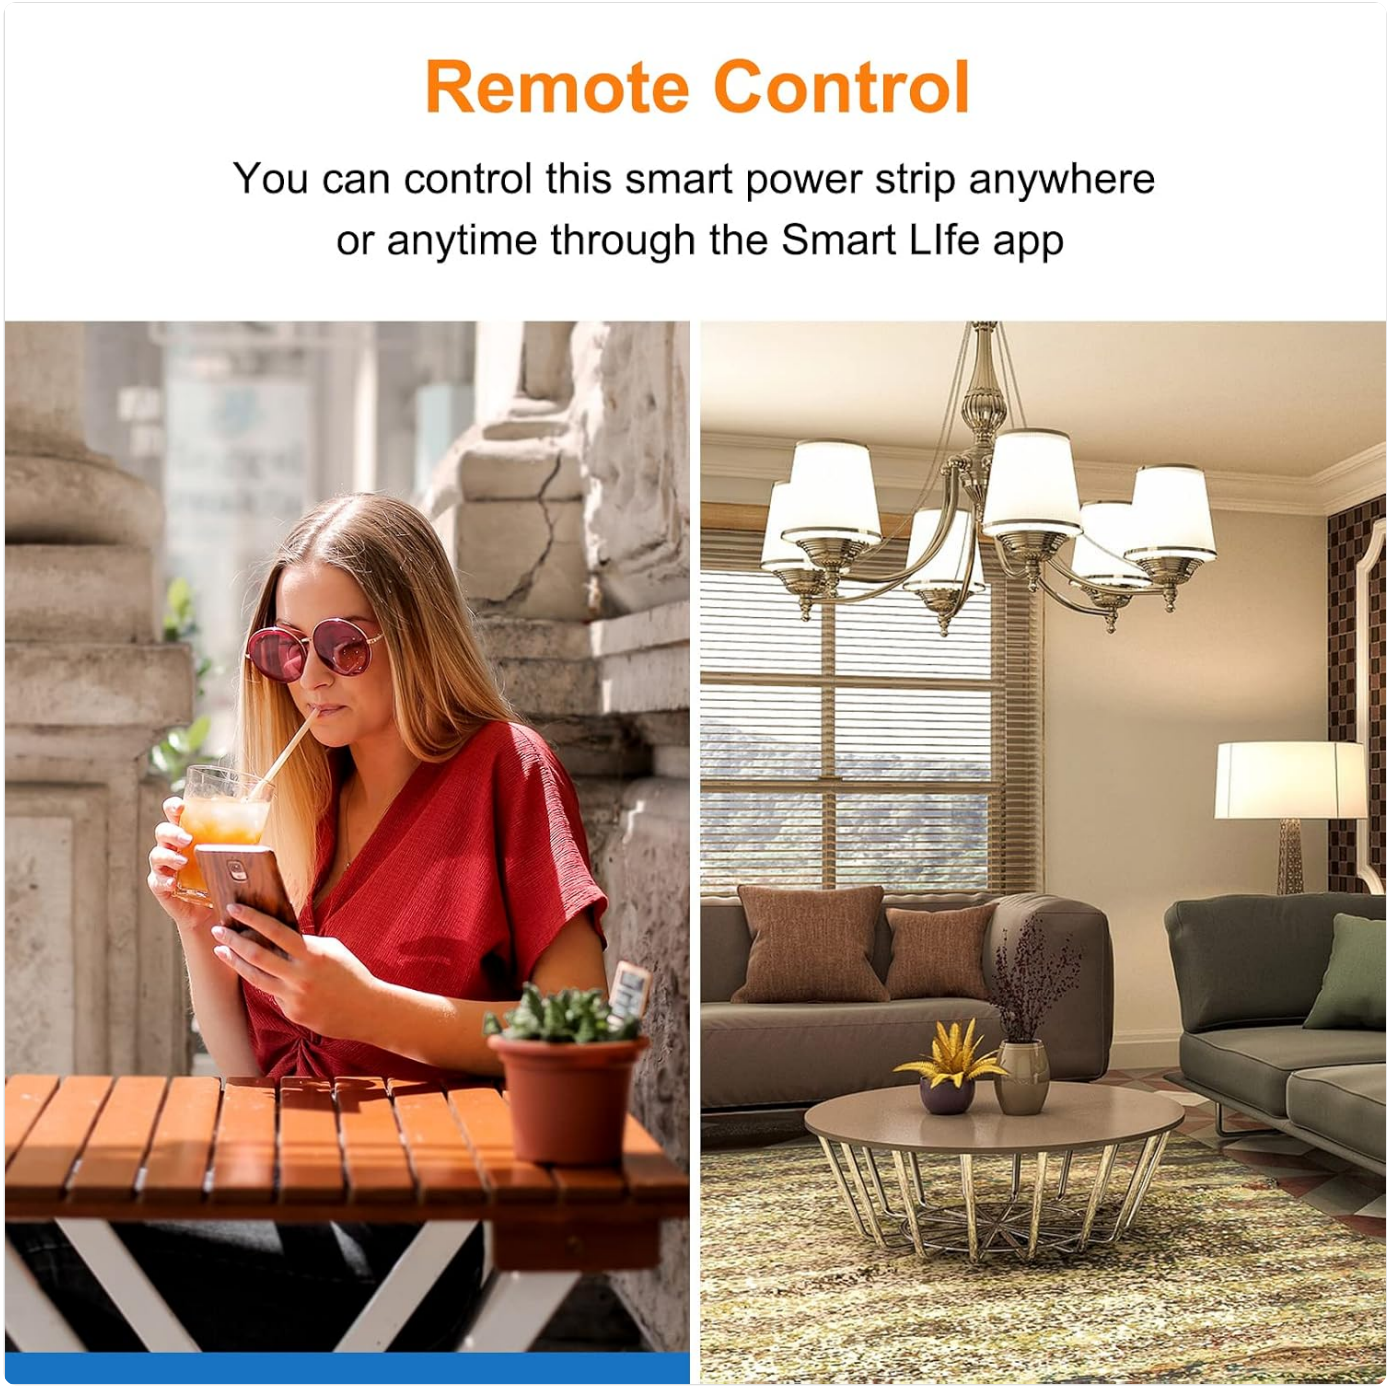


Figure 6: Hands-free voice control with Alexa or Google Home.

3.4 Energy Monitoring

The power strip can monitor the total energy consumption of all connected devices (outlets and USB ports combined). You can view real-time and historical energy usage data within the Smart Life/TUYA Smart app.

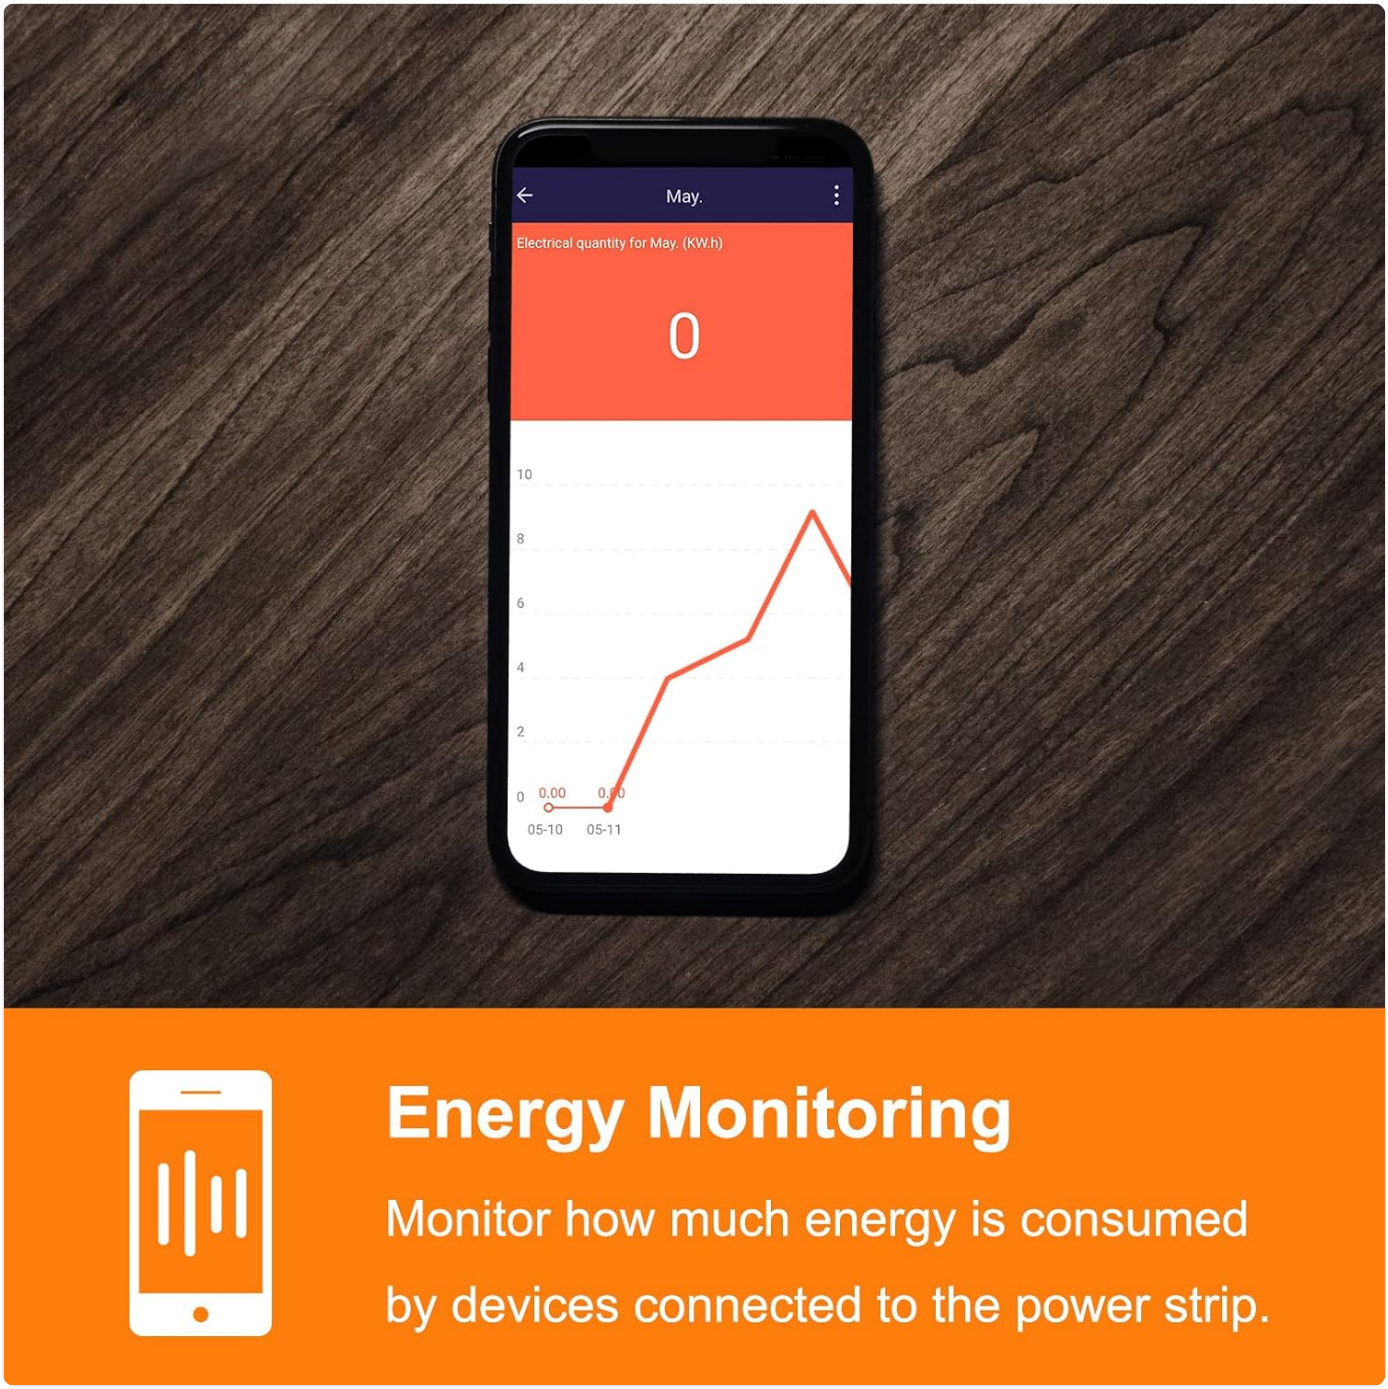


Figure 7: Energy monitoring interface in the app, displaying consumption data.

3.5 Scheduling and Timer Functions

Set schedules and timers to automatically turn your appliances on or off at specific times. This feature helps automate your home and save energy by preventing devices from running unnecessarily.

- **Schedule:** Program devices to turn on/off at specific times on specific days.
- **Timer:** Set a countdown timer for a device to turn on/off after a set duration.



Figure 8: Example of scheduling and timer functions within a home environment.

4. Maintenance

To ensure the longevity and optimal performance of your ANTELA Smart Power Strip, follow these maintenance guidelines:

- **Cleaning:** Disconnect the power strip from the wall outlet before cleaning. Use a soft, dry cloth to wipe the surface. Do not use liquid cleaners or abrasive materials.
- **Environment:** Keep the power strip in a dry environment, away from moisture, direct sunlight, and extreme temperatures.
- **Ventilation:** Ensure adequate ventilation around the power strip to prevent overheating. Do not cover it with cloths or other materials.

- **Inspection:** Periodically inspect the power cord and the power strip for any signs of damage. If any damage is found, discontinue use immediately and contact support.
- **Safety:** Do not attempt to disassemble or repair the power strip yourself. This can void the warranty and pose safety risks.

5. Troubleshooting

If you encounter issues with your ANTELA Smart Power Strip, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Device cannot connect to Wi-Fi.	Incorrect Wi-Fi password; Router is 5GHz only; Device is too far from router.	Ensure correct 2.4 GHz Wi-Fi password. Move device closer to router. Check router settings for 2.4 GHz band.
Outlets or USB ports are not responding.	Power strip is off; App issue; Overload protection activated.	Check if the master switch is on. Restart the Smart Life/TUYA Smart app. Unplug high-power devices and restart the power strip.
Voice control is not working.	Incorrect linking with voice assistant; Device name mismatch.	Ensure Smart Life/TUYA Smart app is correctly linked to Alexa/Google Home. Verify device names in both apps match.
Power strip frequently loses Wi-Fi connection.	Weak Wi-Fi signal; Network interference; Router issues.	Relocate the power strip closer to the router. Reduce Wi-Fi interference from other devices. Restart your Wi-Fi router.

If the problem persists after trying these solutions, please contact ANTELA customer support for further assistance.

6. Specifications

Feature	Detail
Model Number	M3su411
Dimensions (L x W x H)	43 x 5.8 x 6.2 cm
Weight	730 grams
Operating Voltage	230 Volts
Rated Current	16 A

Feature	Detail
Material	V0 Ignition Material (Fire Resistant)
Cable Length	1.8 meters
International Protection (IP) Rating	IP20
Certifications	CE, RoHS
Control Method	Application (Smart Life/TUYA Smart)
USB Output	DC5V, Single Port Max 2.1A, Total 3.1A (USB-C supports fast charging, USB-A does not)

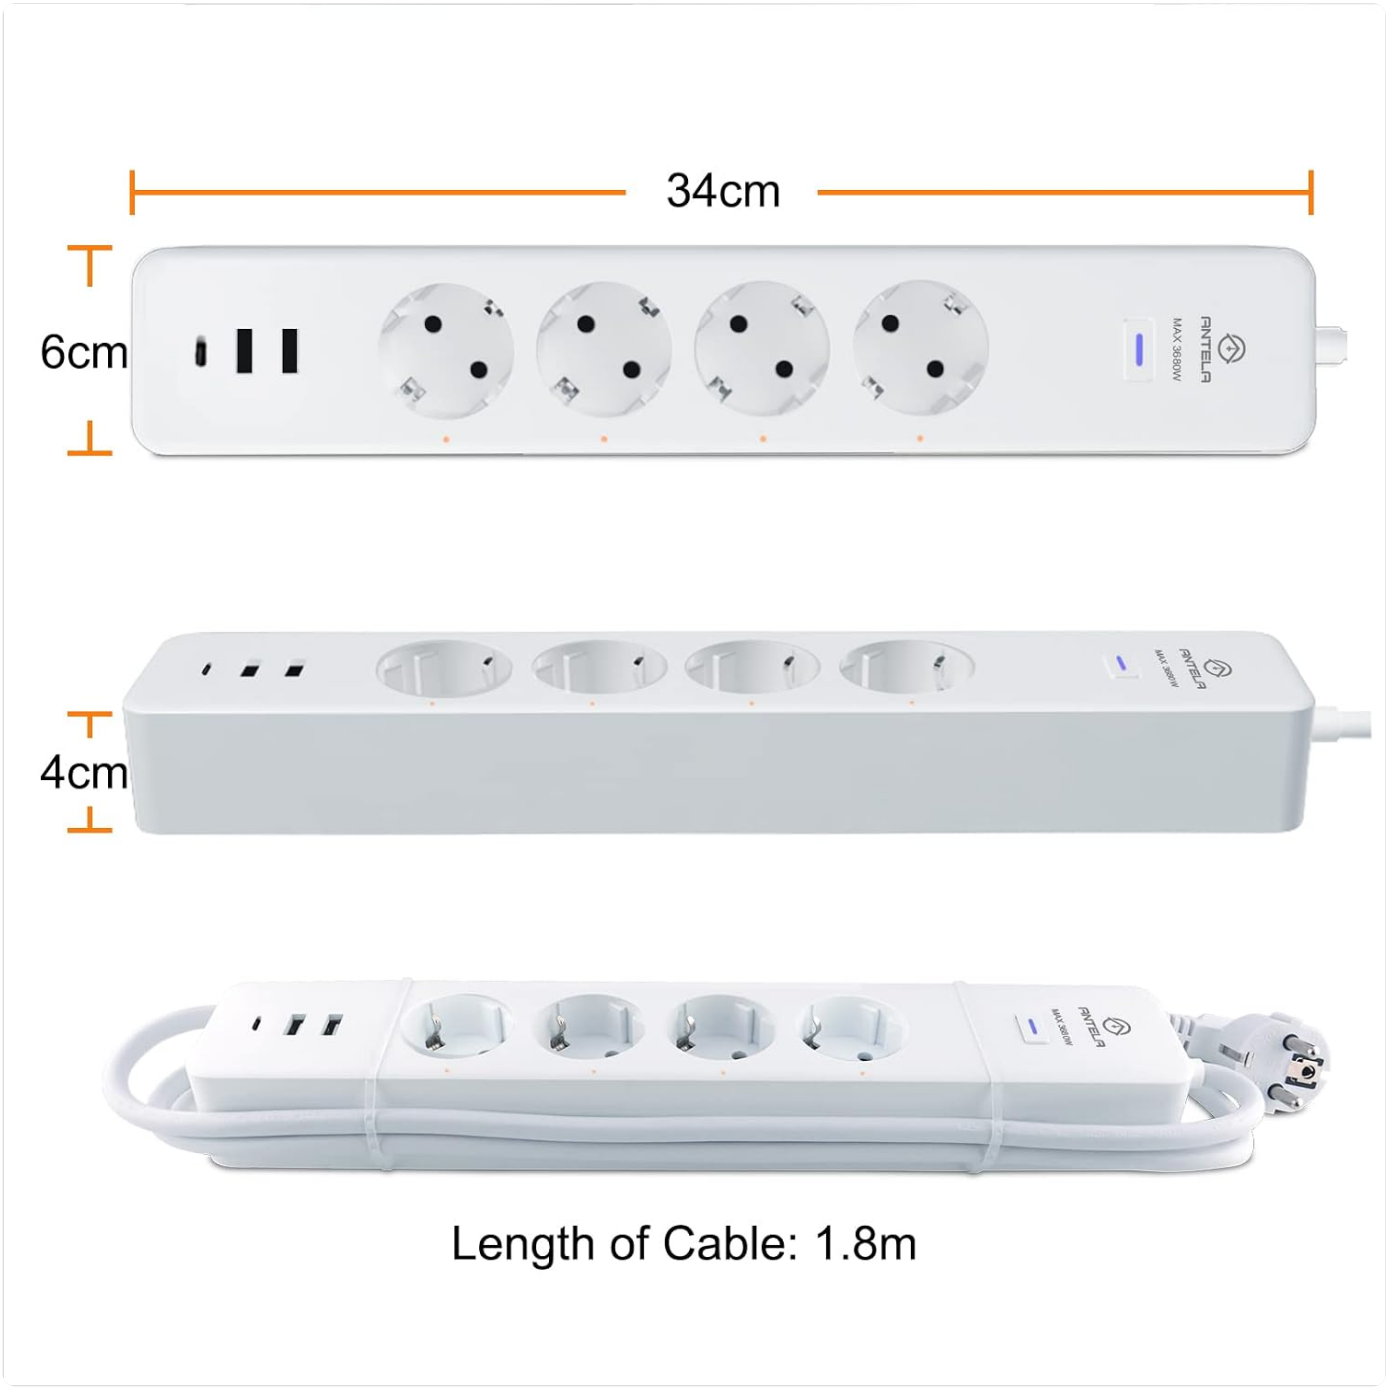


Figure 9: Physical dimensions of the Smart Power Strip.



Figure 10: Safety features and multiple protection mechanisms of the power strip.

7. Warranty and Support

For warranty information and customer support, please refer to the documentation provided with your purchase or visit the official ANTELA website. You can also contact the seller directly through the platform where you purchased the product.

Please retain your proof of purchase for any warranty claims.

© 2024 ANTELA. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B09RZSY27J

More documents and user manuals: **https://manuals.plus/**