



Manuals.plus /

› Findepot /

› Findepot Frameless Pivot Shower Door 33-34" W x 72" H Instruction Manual

Findepot FD-US-SD18-BN3472-6

Findepot Frameless Pivot Shower Door

Model: FD-US-SD18-BN3472-6

INTRODUCTION

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of your Findepot Frameless Pivot Shower Door. Please read these instructions carefully before beginning installation to ensure safe and correct assembly and use.

The Findepot Frameless Pivot Shower Door is designed for modern bathrooms, offering a sleek appearance and functional design. It features 1/4 inch (6mm) clear ANSI tempered glass and a reversible installation option for right or left-hand opening.

SAFETY INFORMATION

- Always wear safety glasses during installation.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges.
- Ensure the installation surface is level and structurally sound.
- Use appropriate tools and follow all local building codes.
- Two people are recommended for installation due to the weight and size of the glass panels.

EXPLOSION-PROOF TEMPERED GLASS



High Strength

5 times stronger than ordinary glass



Safety

Safe and explosion-proof
No sharp pieces when the glass are broken



SGCC Certified

1/4"
(6mm)



ORDINARY GLASS



TEMPERED GLASS

Image Description: This image illustrates the safety features of the shower door's tempered glass. It shows that the 1/4 inch (6mm) ANSI certified tempered glass is 5 times stronger than ordinary glass and designed not to break into sharp pieces. The SGCC Certified logo is also visible.

The shower door is constructed with 1/4 inch (6mm) ANSI certified tempered glass, designed for high strength and safety. In the rare event of breakage, it will shatter into small, blunt pieces rather than sharp shards.

PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, contact customer support.

- Glass Panel (1/4" (6mm) clear tempered glass)
- Wall Profiles
- Pivot Hinges
- Door Handle (High Quality Stainless Steel)
- Bottom and Side Seal Strips
- Installation Hardware (screws, anchors, gaskets, etc.)

Practical Handle Design




High Quality
Stainless Steel



Image Description: This image displays a close-up of the shower door's handle, emphasizing its practical design and construction from high-quality stainless steel. A towel is draped over the handle, demonstrating its utility.

SPECIFICATIONS

Brand	Findepot
Model Number	FD-US-SD18-BN3472-6
Dimensions (W x H)	33.6-34.4 inches x 72 inches (0.24 x 34 x 72 inches product dimensions)
Glass Thickness	1/4 inch (6mm)
Glass Type	Clear Tempered Glass, ANSI Certified
Finish	Brushed Nickel
Material	Glass, Stainless Steel (handle)
Door Type	Frameless Pivot Swing
Installation	Reversible (Right or Left opening)
Width Adjustment	Up to 0.5 inch on each side
Special Features	Double-sided Nano Coating, Waterproof Seal Strips

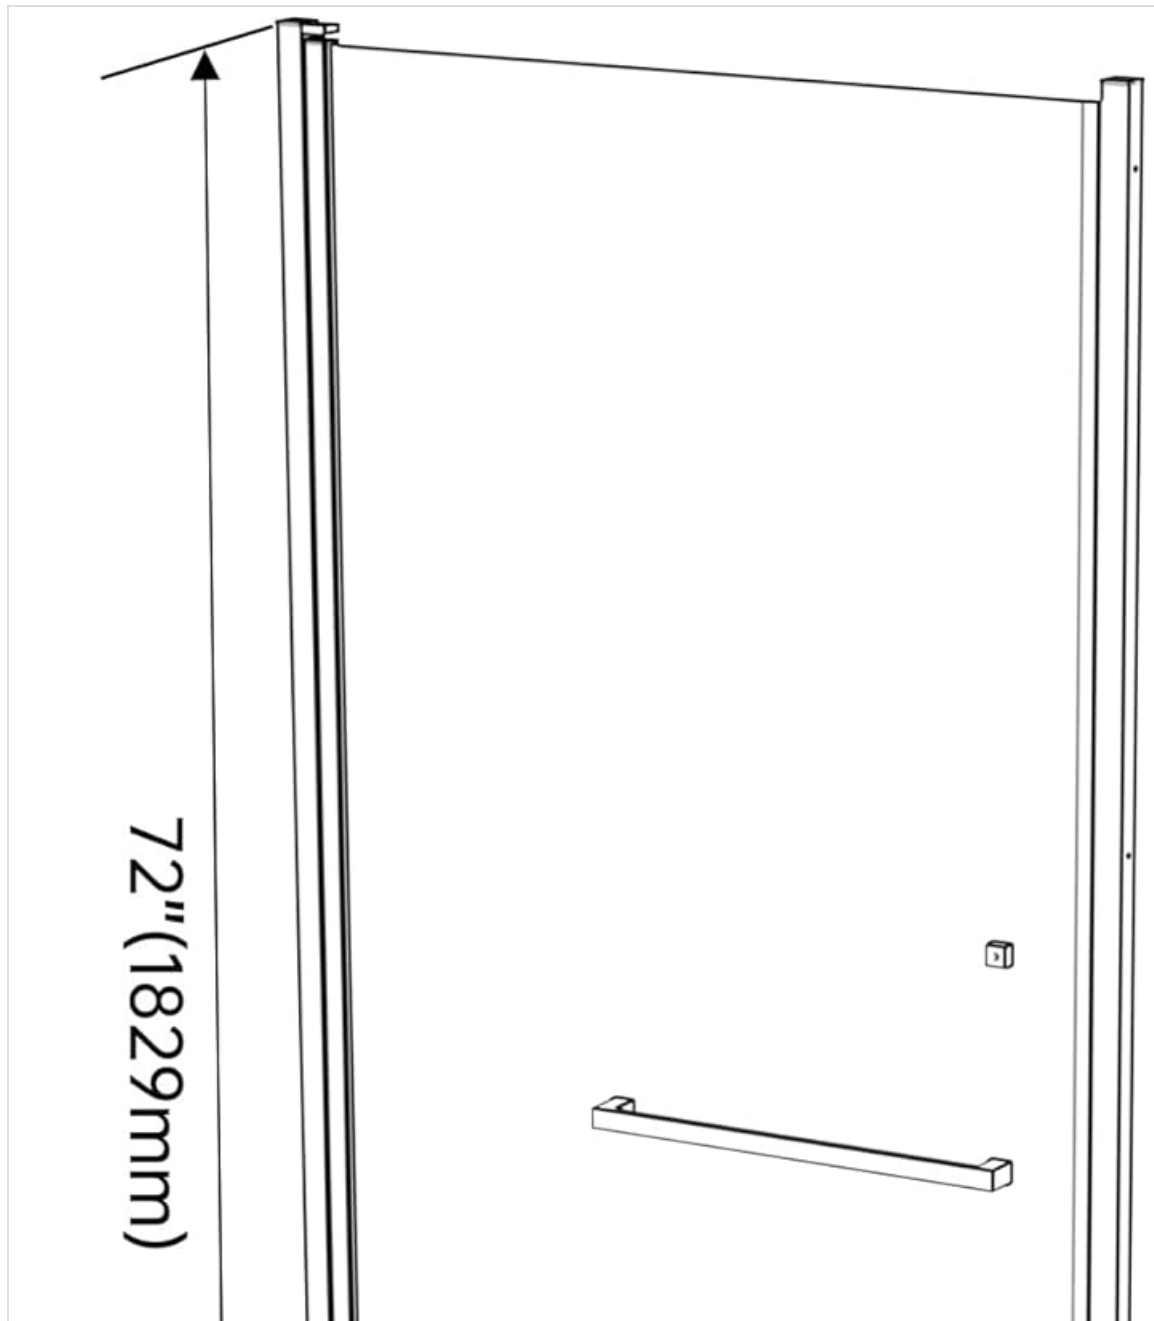


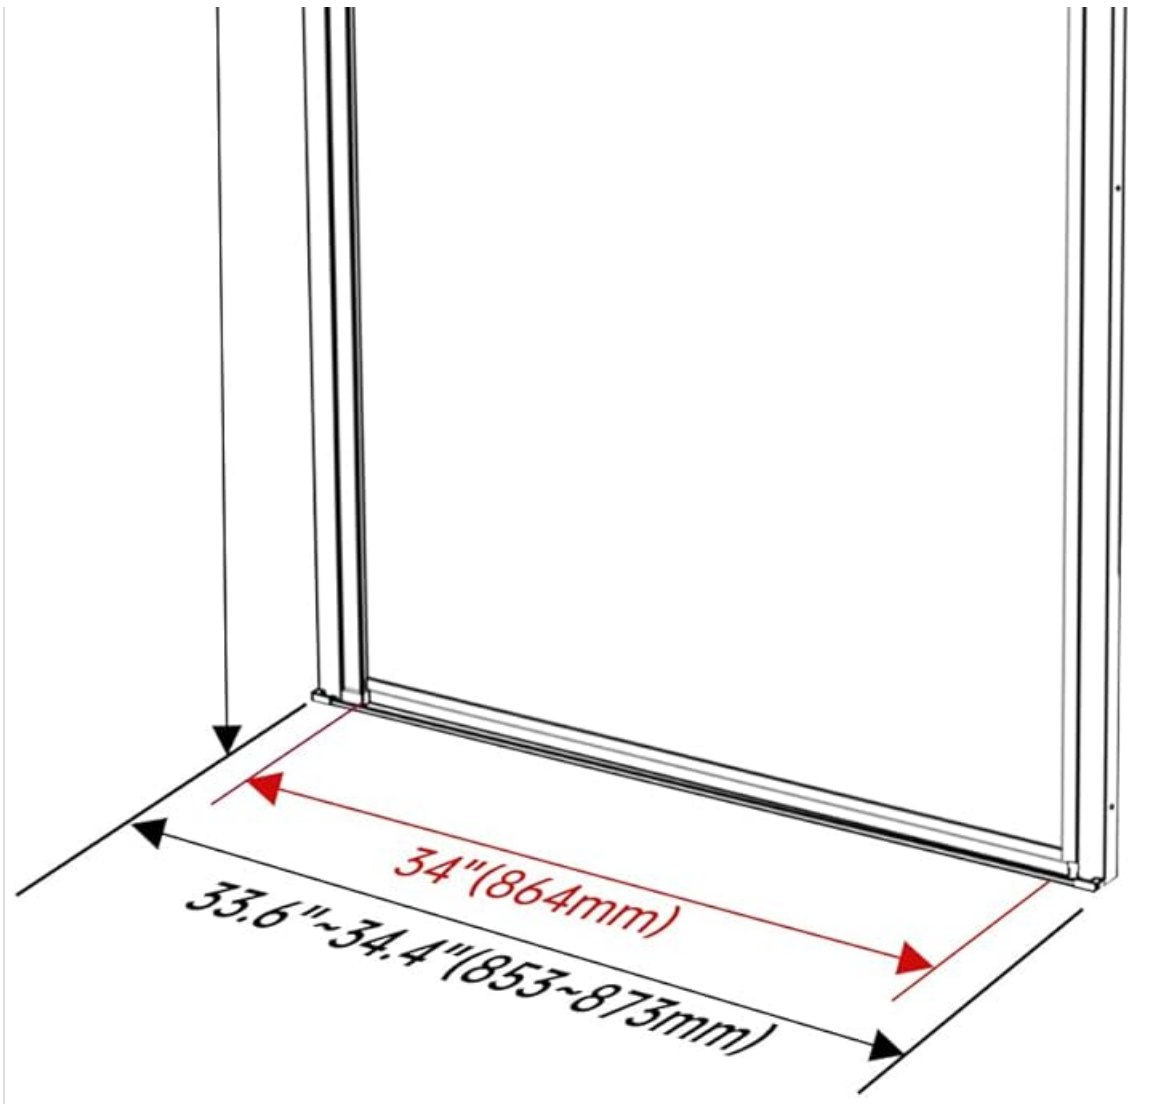


Image Description: This technical drawing provides precise measurements of the shower door. It indicates a height of 72 inches (1829mm) and an adjustable width range of 33.6 to 34.4 inches (853-873mm).

Width Adjustable On Both Sides

A maximum adjustment of 0.5 inch on each side

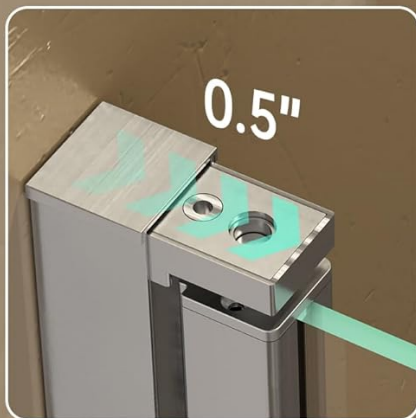

Right



Left



Image Description: This diagram visually explains the width adjustment feature of the shower door. It shows how the frame allows for a maximum adjustment of 0.5 inches on both the right and left sides, facilitating installation in slightly varying opening sizes.

SETUP AND INSTALLATION

Installation of this frameless pivot shower door is designed to be straightforward. A comprehensive installation video and detailed instructions are typically included with the product. All necessary hardware is provided.

- 1. Preparation:** Ensure the shower opening dimensions are within the specified range (33.6-34.4 inches wide). Clean the installation area thoroughly.
- 2. Wall Profile Installation:** Mount the wall profiles securely to the shower wall using the provided hardware. Ensure they are plumb and level.
- 3. Glass Panel Placement:** Carefully position the glass panel into the wall profiles and attach the pivot hinges. This step often requires two people.
- 4. Door Handle Attachment:** Install the stainless steel door handle onto the glass panel.
- 5. Seal Strip Application:** Apply the bottom and side seal strips to ensure a watertight enclosure.
- 6. Adjustment:** Utilize the 0.5-inch adjustment on each side of the wall profiles to achieve a perfect fit and smooth door operation.

7. **Final Check:** Test the door's swing and ensure all seals are properly seated and there are no gaps.

For a visual guide, refer to the installation video provided by Findepot. If drilling through tile, a diamond-tipped hole saw may be required (not included).

OPERATION

The Findepot Frameless Pivot Shower Door operates by swinging inward or outward, depending on the installation. The door is reversible, allowing for either right or left-hand opening to suit your bathroom layout.

- To open the door, gently pull or push the handle in the desired direction.
- Ensure the door closes completely to engage the seal strips and prevent water leakage.



Image Description: This image presents a complete view of the installed frameless pivot shower door within a contemporary bathroom. It shows the door in a slightly open position, demonstrating its pivot functionality.

MAINTENANCE

Proper maintenance will ensure the longevity and appearance of your shower door.

- **Glass Cleaning:** The double-sided nano coating on the glass repels water stains and soap residue. Clean the glass regularly with a soft cloth and mild, non-abrasive glass cleaner. Avoid harsh chemicals or abrasive pads that could damage the coating.
- **Hardware Cleaning:** Wipe down metal components (Brushed Nickel finish) with a soft, damp cloth. Do not use abrasive cleaners or scouring pads, as these can scratch the finish.
- **Seal Strips:** Periodically check the bottom and side seal strips for wear or damage. Replace them if necessary to maintain the waterproof integrity of the shower enclosure.
- **Hinges:** Ensure pivot hinges operate smoothly. If they become stiff, apply a small amount of silicone-based lubricant (avoid oil-based lubricants).



Image Description: This image compares nano-coated glass with normal glass. The nano-coated side shows water beading and easily repelling, while the normal glass side shows water stains and residue, highlighting the "Easy to Clean" benefit of the nano-coating.



DRY/WET SEGREGATION

- Efficient Waterproof Design
- Keep Your Bathroom Dry



Image Description: This diagram illustrates the effective waterproof design of the shower door. It shows how the bottom and side seal strips create a clear separation between wet and dry areas, preventing water from leaking out of the shower enclosure.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Door does not close properly or leaks.	Misalignment, worn seal strips, improper installation.	Check wall profiles for plumb and level. Adjust door alignment using the 0.5-inch adjustment feature. Inspect and replace worn seal strips. Re-check installation steps.
Door is stiff or squeaks when opening/closing.	Dirty or dry pivot hinges.	Clean hinges and apply a small amount of silicone-based lubricant.
Water spots or residue on glass.	Hard water deposits, infrequent cleaning.	Clean regularly with a soft cloth and mild glass cleaner. The nano-coating helps, but regular wiping is still recommended.
Scratches on metal finish.	Abrasive cleaners or tools used.	Avoid abrasive materials. For existing scratches, consult a professional for repair or touch-up options for brushed nickel finishes.

WARRANTY AND SUPPORT

Findepot is committed to providing quality products and customer satisfaction.

- **Lifetime Support:** Dedicated after-sales support is available for the lifetime of the product.
- **Return Policy:** A 30-day no-questions-asked return policy is offered.
- **Customer Service:** We aim to reply to all inquiries within 24 hours.

For any questions, assistance, or to report missing/damaged parts, please contact us:

Email: After-sale-service-QA@outlook.com



Image Description: This image outlines Findepot's customer support commitments, including a 24-hour response time, a 30-day no-

questions-asked return policy, and dedicated lifetime after-sales support. Contact information is also provided.