



[Manuals.plus](#) /

› [From Plain To Beautiful In Hours](#) /

› From Plain To Beautiful In Hours MG-2505-8f-10 Honeycomb Wood Slat Walls Instruction Manual

From Plain To Beautiful In Hours MG-2505-8f-10

From Plain To Beautiful In Hours MG-2505-8f-10 Honeycomb Wood Slat Walls Instruction Manual

Model: MG-2505-8f-10

INTRODUCTION

This manual provides detailed instructions for the installation, care, and maintenance of your From Plain To Beautiful In Hours MG-2505-8f-10 Honeycomb Wood Slat Walls. Please read all instructions carefully before beginning installation to ensure proper application and optimal performance.

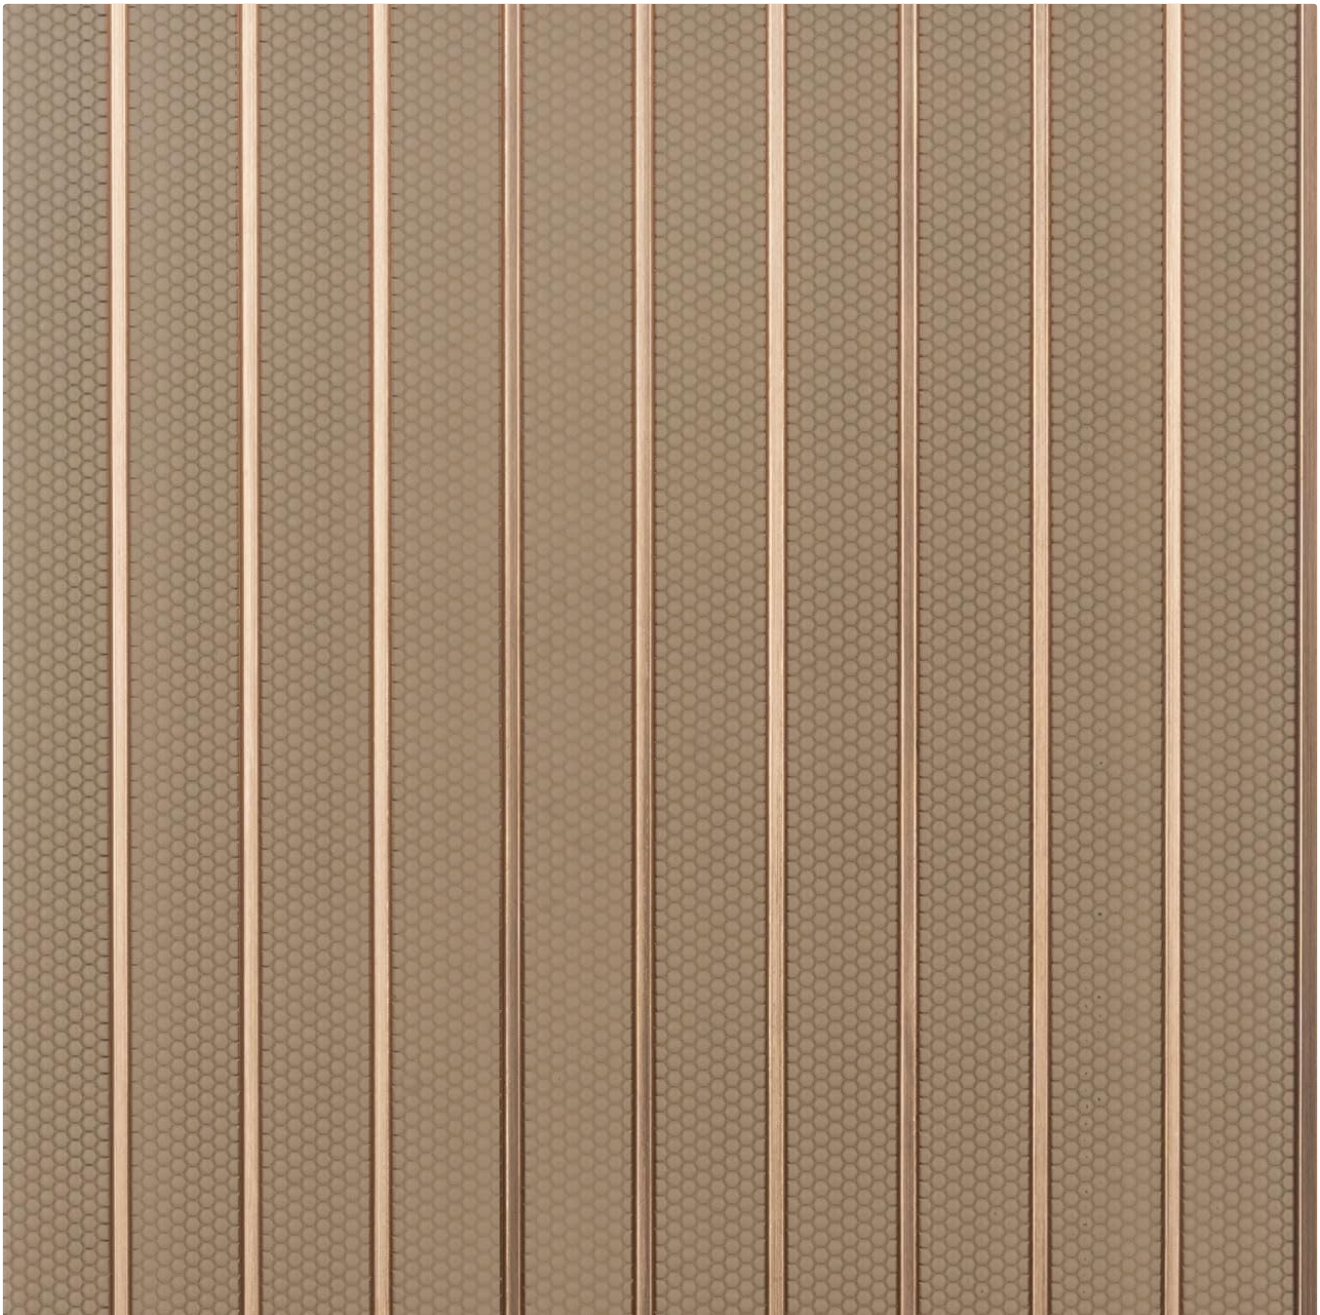


Image: Close-up view of the Matt Pearl Gold Honeycomb Wood Slat Wall panel, showcasing its textured surface and metallic slat details.


PRODUCT FEATURES

- **Eco-Friendly Composition:** Crafted from 96.4% recycled materials, utilizing plastic found in everyday yogurt pots.
- **Effortless Installation:** Features an easy shiplap system for quick, DIY-friendly installation without specialized tools.
- **Tested for Safety:** Tested in accordance with ASTM E84 standards for surface burning characteristics of building materials. *(Note: Not rated for commercial use.)*
- **Stylish & Versatile Design:** Available in a Matt Pearl Gold finish to complement various interior styles.
- **Improved Room Acoustics:** Slat wall panels are designed to absorb and diffuse sound waves, enhancing sound quality and comfort.

SPECIFICATIONS

Brand	From Plain To Beautiful In Hours
Model Number	MG-2505-8f-10
Material	Polystyrene (PS)
Color	Matt Pearl Gold
Finish Type	Matt Pearl Gold
Product Dimensions (per panel)	94.5" L x 12" W
Item Weight (per panel)	Approximately 3.92 lbs (39.2 lbs for 10 panels)
Unit Count	10.0 Count (panels)
Coverage (10 panels)	78.8 Square Feet
Installation Type	Glue-up
Recommended Uses	Kitchen, Walls, Living Room, Residential, Commercial (excluding areas with high moisture)
UPC	810166278591

Size :

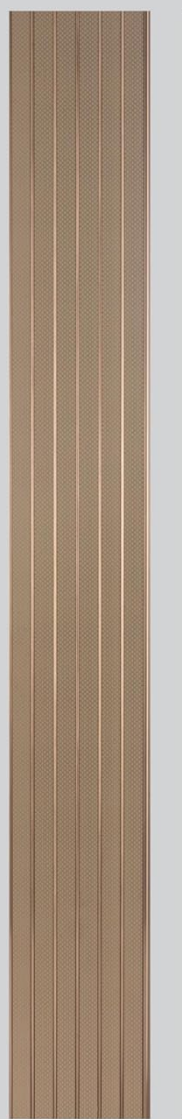

94.5"

12"



Installation Tools



Image: Dimensional diagram of the slat wall panel, indicating overall length and width, along with individual slat and groove measurements.

SAFETY INFORMATION

- Always wear appropriate personal protective equipment (PPE) such as safety glasses and gloves during installation.
- Ensure the work area is well-ventilated when using adhesives.
- Keep panels and tools out of reach of children and pets.
- Do not install in areas with high moisture content, as this product is not rated for such environments.
- This product is not rated for commercial use, despite being recommended for commercial settings in some contexts. Please verify local building codes for specific commercial applications.

TOOLS REQUIRED

The following tools are recommended for installation:

- Circular Saw (for cutting panels)
- Glue Gun (for adhesive application)
- Measuring Tape
- Level
- Pencil
- Utility Knife

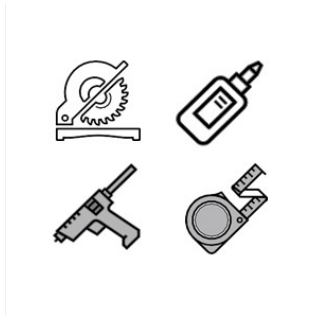


Image: Visual representation of essential installation tools including a circular saw, glue gun, and measuring tape.

INSTALLATION GUIDE

1. Surface Preparation

Ensure the installation surface is clean, dry, smooth, and structurally sound. Remove any loose paint, wallpaper, or debris. A flat, even surface is crucial for proper adhesion and a seamless finish.

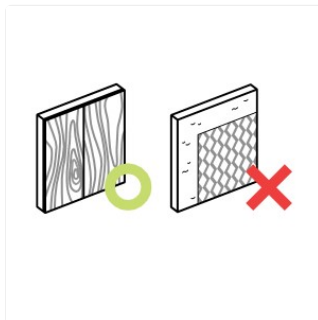


Image: Illustration demonstrating suitable (smooth) and unsuitable (uneven/mesh) wall surfaces for panel installation.

2. Planning and Measurement

Measure the area where the panels will be installed. Plan the layout to minimize cuts and ensure a balanced appearance. Consider starting from a central point or a prominent corner.

3. Applying Adhesive

Apply a strong construction adhesive to the back of each panel in a serpentine pattern. Ensure adequate coverage, especially along the edges, to secure the panel firmly to the wall.

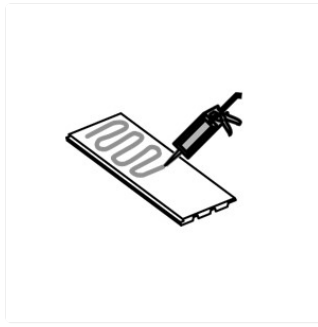


Image: Depiction of applying adhesive to the rear of a panel using a glue gun, illustrating the recommended serpentine pattern.

4. Panel Attachment

Carefully align the first panel and press it firmly onto the prepared surface. Use the shiplap system to interlock subsequent panels, ensuring a tight and seamless fit. Apply consistent pressure across the entire panel surface to ensure good adhesion.

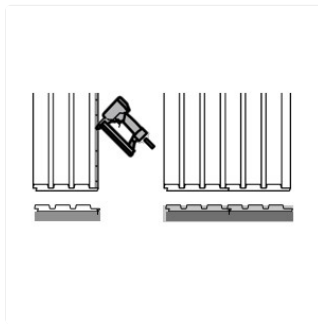


Image: Illustration of the shiplap interlocking mechanism, demonstrating how panels connect for a flush installation.

5. Cutting Panels

For custom fits around corners, outlets, or at the end of a wall, use a circular saw to cut the panels. Measure accurately and mark the cut line before cutting. A utility knife can be used for minor adjustments or scoring.

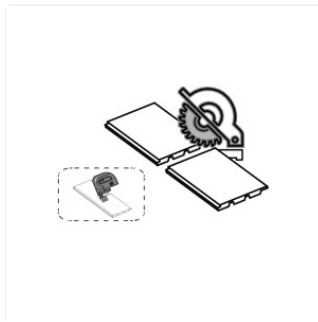


Image: Visual guide for cutting panels using a circular saw, with an additional note for using a utility knife for precision cuts.

6. Corner Installation

When installing around corners, ensure a clean 90-degree angle. Panels can be mitered or butted together, depending on the desired aesthetic. Ensure the interlocking system is maintained for a secure fit.



Image: Diagram illustrating the method for installing panels around a 90-degree corner, highlighting the interlocking profile.



Image: Example of the Matt Pearl Gold Honeycomb Wood Slat Walls installed in an office environment, demonstrating a finished application.



Living Room

LIVE APPLICATION

Image: Example of the Matt Pearl Gold Honeycomb Wood Slat Walls installed in a living room, highlighting its decorative impact.

MAINTENANCE AND CARE

To maintain the appearance and longevity of your slat wall panels, follow these guidelines:

- **Cleaning:** Wipe panels with a soft, damp cloth. Avoid abrasive cleaners, harsh chemicals, or excessive moisture, as these can damage the finish.
- **Dusting:** Regularly dust the panels with a dry, soft cloth or a feather duster to prevent dust buildup in the grooves.
- **Avoid Impact:** Protect the panels from sharp objects or heavy impacts that could cause dents or scratches.
- **Temperature and Humidity:** While durable, extreme fluctuations in temperature and humidity should be avoided to prevent potential warping or damage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Panels not adhering properly	Insufficient adhesive, uneven surface, dusty surface.	Ensure surface is clean and smooth. Apply adequate adhesive. Apply firm, even pressure during installation.
Gaps between panels	Improper alignment during installation, insufficient pressure.	Ensure panels are fully interlocked using the shiplap system. Apply consistent pressure to close gaps.
Panels appear uneven	Uneven wall surface, panels not level.	Ensure wall surface is properly prepared and level before installation. Use a level during installation to check alignment.

WARRANTY AND SUPPORT

For specific warranty information or technical support, please refer to the product packaging or contact From Plain To Beautiful In Hours customer service directly. Keep your purchase receipt as proof of purchase. For further assistance, visit the [From Plain To Beautiful In Hours Store](#).