

- Manuals.plus /
- › Superer /
 - › Superer 10 ft AC Power Cord User Manual (Model XYT-52E, XYT-53E)

Superer XYT-52E, XYT-53E

Superer 10 ft AC Power Cord User Manual

Models: XYT-52E, XYT-53E

1. INTRODUCTION

This manual provides essential information for the safe and effective use of your Superer 10 ft AC Power Cord. Please read these instructions carefully before use and retain them for future reference.



Image 1.1: The Superer 10 ft AC Power Cord, featuring a non-polarized 2-prong Figure 8 connector and a standard NEMA 1-15P plug.

2. PRODUCT FEATURES

- **Length:** 10 feet (3 meters) for extended reach.
- **Connector Type:** Non-Polarized 2-Prong Figure 8 (IEC 60320 C7 to NEMA 1-15P).
- **Electrical Rating:** 18 AWG, 125V, 10A.
- **Safety Certification:** ETL Listed for enhanced safety.
- **Durability:** Designed for abrasion resistance, high insulation, and tensile strength.

Safety Protection

Abrasion
Resistance



Waterproof



High Insulation
Tensile Strength

Image 2.1: Illustration of the power cord's safety features, including ETL certification, abrasion resistance, and high insulation tensile strength.

3. COMPATIBILITY

This power cord is compatible with a wide range of devices requiring a non-polarized Figure 8 (C7) power input. Refer to your device's manual for specific power requirements.

3.1 Compatible Devices Include:

- **Bose SoundTouch Series:** 10, 20, 30
- **Bose Soundbar:** Solo 300, 550, 600, 700, 900
- **Bose Home Smart Speakers:** 450, 500
- **Sonos Speakers:** One, One SL, Five, Play 1, 3, 5
- **Sonos Soundbars/Components:** Arc, Arc Ultra, Beam, Ray, Sub Gen 3 & Mini, Amp, Playbar, Playbase
- Other devices such as certain monitors, scanners, printers, and TVs that use a Figure 8 (C7) power input.

Wide Compatibility

Monitor



Scanner



Printer



TV



SoundBar



Image 3.1: Visual representation of the power cord's wide compatibility with various electronic devices, including monitors, scanners,



Image 3.2: Guide illustrating the correct Figure 8 (C7) charging port shape for compatibility, advising users to check their device's port before purchase.

4. SETUP AND OPERATING INSTRUCTIONS

4.1 Setup

1. Ensure your device is powered off and unplugged from its current power source.
2. Locate the power input port on your device. This cord uses a non-polarized Figure 8 (C7) connector.
3. Firmly insert the Figure 8 end of the Superer power cord into the device's power input port.
4. Plug the NEMA 1-15P end of the power cord into a standard 125V AC wall outlet.

4.2 Operating

Once properly connected, your device should receive power. Turn on your device as per its manufacturer's instructions. This power cord is designed for stable power delivery, ensuring reliable operation.



Image 4.1: The Superer power cord connected to a soundbar and plugged into a wall outlet, demonstrating a typical setup.

5. MAINTENANCE AND CARE

- **Storage:** When not in use, coil the cable loosely. Avoid tight coiling or sharp bends to prevent damage.
- **Cleaning:** Wipe the cable with a dry, soft cloth. Do not use liquid cleaners or immerse the cable in water.
- **Environment:** Keep the power cord away from extreme temperatures, direct sunlight, and moisture.

- **Inspection:** Periodically inspect the cord for any signs of damage, such as fraying, cuts, or bent prongs. Discontinue use if damage is found.

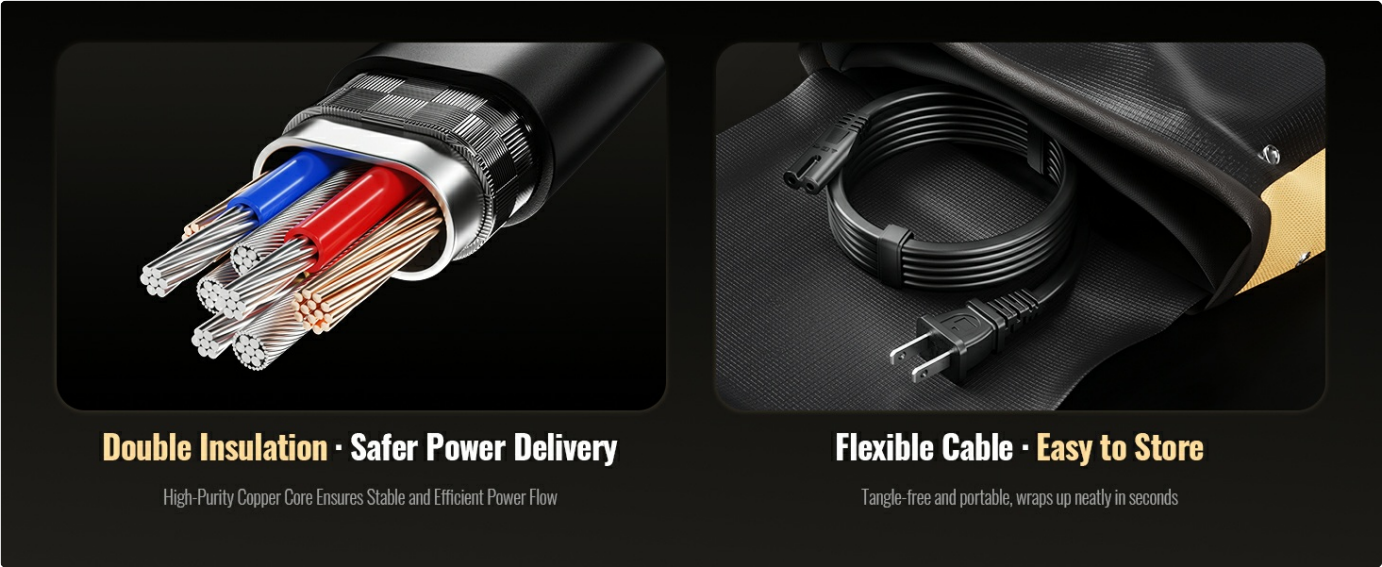


Image 5.1: Illustration highlighting the flexible design of the cable, making it easy to store without tangling.

6. TROUBLESHOOTING

6.1 No Power to Device

- **Check Connections:** Ensure both ends of the power cord are fully and securely plugged into the device and the wall outlet.
- **Test Outlet:** Plug another working appliance into the same wall outlet to confirm the outlet is functional.
- **Inspect Cord:** Visually inspect the power cord for any visible damage. If damaged, discontinue use and replace.
- **Device Power:** Confirm the device itself is turned on and functioning correctly with its original power cord, if available.

If the issue persists after performing these checks, please contact Superer customer support.

7. SPECIFICATIONS

Specification	Detail
Model Numbers	XYT-52E, XYT-53E
Length	10 Feet (approximately 3 meters)
Connector Type (Device)	IEC 60320 C7 (Figure 8, Non-Polarized)
Connector Type (Wall)	NEMA 1-15P (US 2-Prong)
Wire Gauge	18 AWG
Voltage Rating	125V AC
Current Rating	10A
Safety Certification	ETL Listed

Color	Black
-------	-------

8. WARRANTY AND SUPPORT

8.1 Warranty Information

This Superer power cord is eligible for replacement or returns within 30 days of purchase. The manufacturer provides an additional 12-month assurance period for product defects.

Positive Customer Support

Refund Within 30 Days of Purchase
and Replace Service Within 12 Months



12

Replace Service Within 12 Months

Worry-free after sales



Replace Service
Within 12 Months



Refund Within
30 Days of Purchase



Quick feedback
to any problems

Image 8.1: Overview of Superer's customer support, including 12-month replacement service and 30-day refund policy.

8.2 Customer Support

For any questions, concerns, or warranty claims, please contact Superer customer support through the official Superer store page or your point of purchase.

[Visit the Superer Store](#)

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0DTKK7GHK>

More documents and user manuals: <https://manuals.plus/>