

CES YJ-B

CES Yupiteru Drive Recorder Accessory Double-Sided Tape (YJ-B) Instruction Manual

Model: YJ-B

1. INTRODUCTION

This manual provides comprehensive instructions for the proper installation and use of the CES Yupiteru Drive Recorder Accessory Double-Sided Tape, model YJ-B. Please read this manual carefully before installation to ensure optimal performance and safety.

2. PRODUCT OVERVIEW

The CES YJ-B double-sided tape is designed as a compatible replacement part for Yupiteru drive recorder accessories. It features strong adhesive properties suitable for various applications within a vehicle's interior.

- **Type:** Compatible replacement part
- **Thickness:** 1.3mm
- **Color:** Black
- **Material:** Sekisui (high-quality adhesive material)

3. SAFETY INFORMATION AND PRECAUTIONS

- **Single Use:** This double-sided tape is designed for single application. Re-sticking or re-adhesion is not possible once applied.
- **Surface Compatibility:** Adhesion will not occur if film is applied to the inside of the glass, or if the interior resin (polypropylene) is present on the application surface.
- **Surface Preparation:** Ensure the application surface is clean and free of grease. For optimal degreasing, A-mon Kogyo's double-sided tape pre-treatment agent is recommended and easily available.
- **Pressure-Sensitive:** The tape is a pressure-sensitive adhesive. It adheres by pressing firmly with your thumb (pressure bonding) for approximately 10 seconds.
- **Glass Condition:** Installation is not possible if the glass has cracks or damage.
- **Glass Breakage:** While pressing with a thumb normally does not break glass, due to individual

differences in applied strength and potential vehicle distortion, glass breakage can occur due to combined factors. The manufacturer is not responsible for glass breakage.

- **Application Temperature:** The ideal temperature for applying double-sided tape is between 20°C and 40°C. If it's hot, please install in a shaded area to lower the glass temperature, or use the air conditioner to set the temperature to around 25°C.

4. INSTALLATION INSTRUCTIONS

1. Prepare the Surface:

Clean the surface where the tape will be applied thoroughly. Use a degreasing agent (e.g., A-mon Kogyo's pre-treatment agent) to remove any oils or residues. Ensure the surface is completely dry before proceeding.

2. Prepare the Tape:

Carefully peel off the red protective film from one side of the double-sided tape. Avoid touching the adhesive surface with your fingers to maintain maximum stickiness.

YJ-B 対応機種

Q-20

Q-20P

Q-21

Q-21A

Q-21c

ZQ-20

ZQ-20

ZQ-21

ZQ-25

Image: Double-sided tape with the red protective film being peeled off, revealing the adhesive surface.

3. Apply Tape to Accessory:

Attach the exposed adhesive side of the tape to the drive recorder accessory bracket. Ensure it is centered and aligned correctly.

YJ-B 貼付け位置参考画像

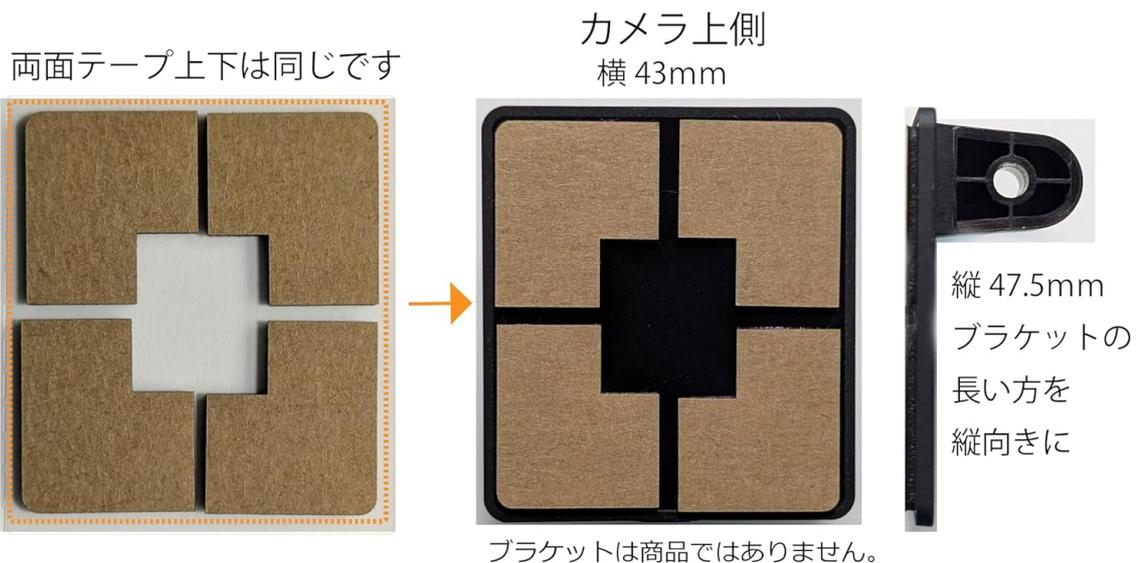


Image: The double-sided tape is shown applied to the back of a drive recorder bracket.

4. Positioning the Bracket (YJ-B Specific):

For model YJ-B, refer to the reference image for optimal attachment position. The top and bottom sides of the double-sided tape are identical. For the camera's top side, the width is 43mm and the length is 47.5mm. Orient the longer side of the bracket vertically.

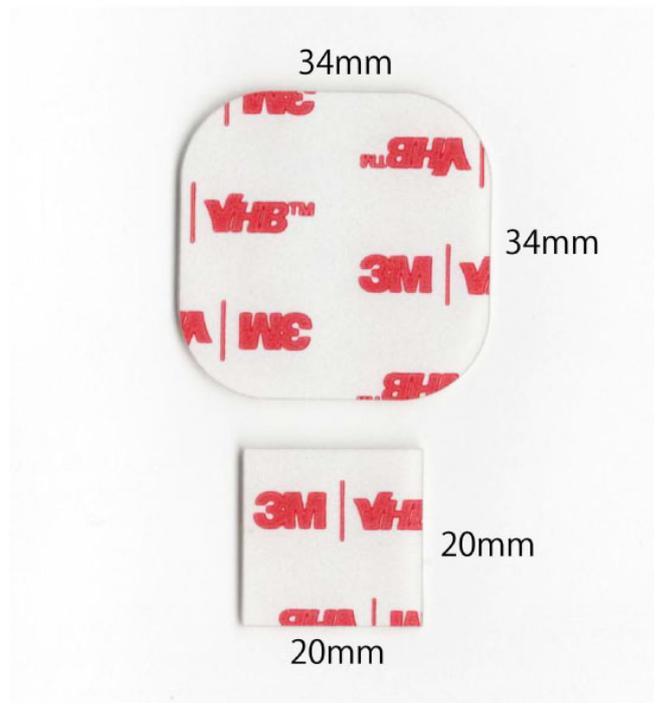


Image: Reference image for YJ-B attachment, illustrating tape dimensions and vertical orientation of the bracket.

Note: The bracket itself is not included with the tape.

5. Attach to Glass:

Remove the remaining protective film from the tape. Carefully position the accessory with the tape onto the desired glass surface. Press firmly with your thumb over the entire surface of the bracket for approximately 10 seconds to ensure strong adhesion.



Image: Hands pressing a drive recorder bracket onto the car windshield. Ensure to check for and press out any air bubbles from the outside.

6. Check for Air Bubbles:

From the outside of the glass, check for any trapped air bubbles between the tape and the glass. If found, press them out with your thumb to ensure complete and even adhesion.

5. OPTIMAL OPERATING CONDITIONS

For best results, apply the double-sided tape in an environment where the temperature is between 20°C and 40°C. If the ambient temperature is high, consider performing the installation in a shaded area or using the vehicle's air conditioning to bring the interior temperature to approximately 25°C.

6. PRODUCT SPECIFICATIONS

Feature	Detail
Brand	CES
Model Name	DR-Y (Variant: YJ-B)
Type	Drive Recorder Accessory Double-Sided Tape
Thickness	1.3 mm
Color	Black
Material	Sekisui (Pressure-sensitive adhesive)
ASIN	B0DVG6J3MQ

7. WARRANTY AND SUPPORT

This product comes with a **180-day warranty** from the date of purchase. If the double-sided tape peels off during this period, the product price will be refunded.

Important Note: The warranty does not cover compensation for direct or indirect damages (such as glass breakage or labor costs) that may arise if the double-sided tape peels off.

For further support or inquiries, please contact your retailer or the manufacturer directly.