

TDH T09 PRO

TDH Smart Toilet T09 PRO Instruction Manual

Model: T09 PRO

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your TDH Smart Toilet T09 PRO. Please read this manual thoroughly before installation and use to ensure proper function and safety. Keep this manual for future reference.



Figure 1: TDH Smart Toilet T09 PRO - A modern, one-piece smart toilet with advanced features.

2. SAFETY INFORMATION

Always follow basic safety precautions when using electrical products, especially when children are present. To reduce the risk of burns, electrocution, fire, or injury to persons:

- Ensure the power outlet is within reach of the unit and meets product specifications.
- Do not immerse the product in water or other liquids.
- Unplug this product before cleaning.
- Close supervision is necessary when this product is used by, on, or near children or invalids.
- Use this product only for its intended use as described in this manual.
- Do not use attachments not recommended by the manufacturer.
- Never operate this product if it has a damaged cord or plug, if it is not working properly, or if it has been dropped or damaged.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- TDH Smart Toilet Unit
- Remote Control
- Angle Valve (American standard 3/4 outlet and 1/2 inlet)
- 7/8 to 3/4 Adapter
- Wax Ring
- Mounting Screws and Hardware
- Backup Battery for Emergency Flush
- User Manual



Figure 2: Included accessories and key dimensions for the TDH Smart Toilet T09 PRO.

4. SETUP AND INSTALLATION

Proper installation is crucial for the optimal performance of your smart toilet. Please follow these steps carefully.

4.1 Pre-Installation Checks

- Ensure the installation area is clean and dry.
- Measure the rough-in distance (distance from the wall to the center of the drain hole) to ensure it is 12 inches (305mm).
- Confirm water pressure meets requirements: 5L water output in 15 seconds, and water inlet pressure of 0.15-0.75MPa.

4.2 Angle Valve Installation

1. Wrap thread seal tape around the interface of the angle valve.
2. Install the angle valve onto the water supply line.
3. Drain residual water from the supply line to clear debris.
4. Insert the water flow restrictor into the outlet with the small end inside.

4.3 Toilet Unit Installation

1. Install expansion screws into the floor flange.
2. Mount the wax ring onto the drain hole.
3. Carefully align the toilet unit with the floor flange and screws.
4. Install the flat washer and nut to secure the toilet to the floor.
5. Connect the braided tube from the toilet to the angle valve and tighten securely. Ensure the braided tube is not bent.
6. Open the angle valve to the maximum position.
7. Check for any water leaks.
8. Plug the power cord into a suitable electrical outlet.
9. Install the remote control in its wall-mounted holder.

Your browser does not support the video tag.

Video 1: How to install the TDH Smart Toilet. This video demonstrates the complete installation process from start to finish.

Your browser does not support the video tag.

Video 2: 7/8 Water pipe installation. This video provides specific instructions for connecting the 7/8 water pipe.

5. OPERATING INSTRUCTIONS

Your TDH Smart Toilet T09 PRO offers various intelligent functions for enhanced comfort and hygiene.

5.1 Automatic Functions

- **Foot Sensor Operation:** Gently tap your foot near the sensor at the base of the toilet to automatically open or close the lid and seat.
- **Approach Sensor:** The lid will automatically open when you approach the toilet.
- **Auto-Flush:** The toilet will automatically flush after use, or after a set period of time when you leave the seat.
- **Pre-Wetting System:** The bowl is pre-wetted before use to help keep it cleaner.

CYCLE OF CLEANLLNESS AND COMFORT

Auto open & Close



Auto open on approach



Auto close & flush
when leave



Off seat flushing



Aromatherapy
deodorization



Automatic wall
lubrication



Self cleaning
nozzle



Heated seat
cushion



Hot air drying



Automatic toilet
flushing



Foot feel flip

Figure 3: Overview of the automatic functions and comfort features of the smart toilet.

OFF-SEAT AUTO FLUSH

New flushing system to achieve strong water flushing



Foot sensation
flushing



Off seat
flushing



remote control



Stop water
flushing



Figure 4: Illustration of the off-seat auto flush system for hands-free operation.

5.2 Remote Control and Side Knob

All functions can be controlled via the remote or the side rotational knob.

- **Cleaning Modes:** Select Rear, Feminine, or Massage wash modes. Adjust nozzle position and water pressure (5 levels).
- **Water Temperature:** Adjust warm water sprayer temperature (multiple levels).
- **Heated Seat:** Adjust seat temperature (multiple levels).
- **Warm Air Drying:** Adjust air temperature for drying (multiple levels).
- **Night Light:** Turn on/off the gentle night light.
- **Flush:** Manual flush button.
- **Stop/Reset:** Stop current operations.

REMOTE CONTROL

All the functions of the Toilet can be controlled through the remote, making it more convenient to use.



POWER OUTAGE FLUSHING

The toilet is equipped with a power outage flushing module to address unexpected power failures. The accessory includes batteries for backup.

SIDE ROTATIONAL KNOB

Quickly activate respective functions by rotating the side knob



Figure 5: Remote control and side rotational knob for easy function access.

**Slow Drop Damping is Quieter
It Opens and Closes Silently**



SMART TEMPERATURE CONTROL SEAT

3-speed adjustment, instant heating
when seated



**Daily cleaning is convenient, creating
a pleasant bathroom experience for
you**



HOT AIR DRYING

Four-speed air temperature
adjustment



Figure 6: Smart temperature control for the seat and adjustable hot air drying.

UPGRADE CONTACTLESS LED DIGITAL DISPLAY

Real-time monitoring of various temperatures and easy

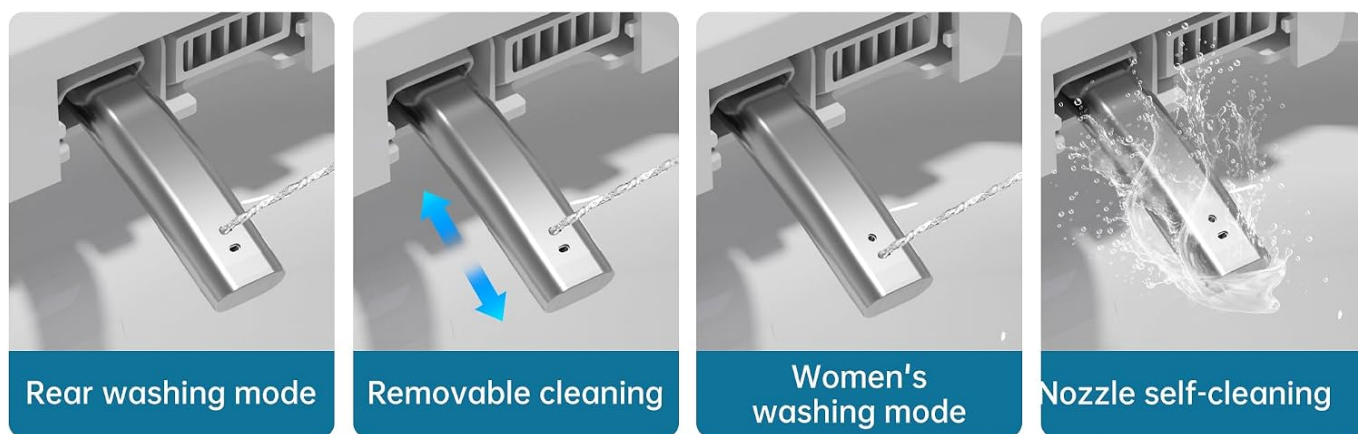
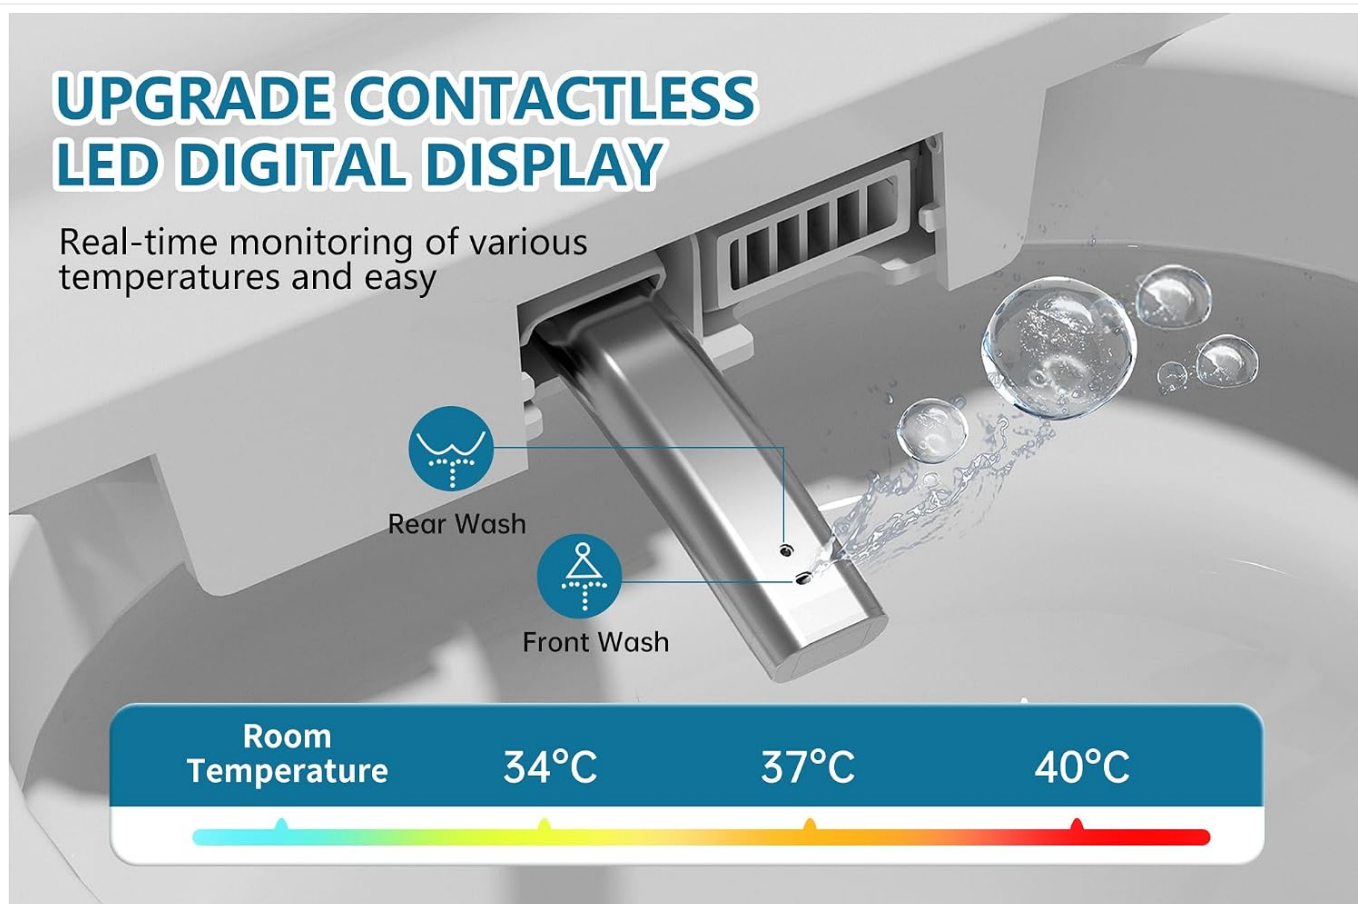


Figure 7: Contactless LED digital display showing real-time temperatures and various nozzle cleaning modes.

Your browser does not support the video tag.

Video 3: Toilet Function Instruction. This video provides a detailed overview of the smart toilet's various functions and how to use them.

Your browser does not support the video tag.

Video 4: How to use smart toilet. A practical demonstration of the smart toilet's features in action.

6. MAINTENANCE

Regular maintenance ensures the longevity and hygiene of your smart toilet.

6.1 Cleaning

- The easy-to-clean glazed ceramic surface simplifies cleaning. Use a soft cloth and mild, non-abrasive cleaners.
- The self-cleaning nozzle activates before and after each use. For deeper cleaning, specific remote functions can extend the nozzle for manual cleaning.



Figure 8: The toilet features an easy-to-clean glazed surface and an LED digital display for monitoring settings.

6.2 Aromatherapy Tablet Replacement

The aromatherapy system uses replaceable fragrance tablets. Replace them when the scent diminishes.

1. Locate the aromatherapy compartment on the side of the toilet.
2. Press the side button to release and remove the compartment.
3. Open the top cover of the compartment and replace the old tablet with a new one.
4. Close the cover and reinsert the compartment into the toilet until it clicks into place.



Figure 9: Aromatherapy tablets keep the air fresh and are easily replaceable.

Your browser does not support the video tag.

Video 5: Foam Shield Replacement. This video demonstrates how to replace the foam liquid in the smart toilet.

7. TROUBLESHOOTING

If you encounter issues with your smart toilet, refer to the following common solutions:

- **No Power:** Check if the power cord is securely plugged in. Ensure the circuit breaker is not tripped.
- **Weak Flush:** Verify that the angle valve is fully open. Check your household water pressure against the product specifications (0.15-0.75MPa).
- **Remote Not Responding:** Ensure the remote control batteries are functional. Re-pair the remote with the toilet if necessary (refer to the full user manual for pairing instructions).
- **Lid/Seat Not Opening/Closing Automatically:** Check for obstructions around the sensors. Ensure the foot sensor is clean.
- **Water Leaks:** Tighten all water connections. If leaks persist, contact customer support.
- **Emergency Flush:** In case of a power outage, use the manual flush button or connect the backup battery for operation.

8. SPECIFICATIONS

Feature	Detail
Model Number	T09 PRO
Product Dimensions	27.6"D x 16.1"W x 18.5"H
Material	Ceramic (Toilet), Plastic (Seat)
Installation Type	Floor Mounted
Rough-in	Standard 12-inch (305mm)

Water Pressure Requirement	0.15-0.75MPa (5L water output in 15 seconds)
Flush Technology	Vortex Flushing System (1.26 GPF)
Special Features	Heated Seat, Warm Water Sprayer & Dryer, Aromatherapy, Foot Sensor, Night Light, Remote Control, Auto-Flush, Pre-Wetting

9. WARRANTY AND SUPPORT

TDH offers a 12-month free accessories parts service for your smart toilet. For any questions or assistance, please contact our 24/7 customer support.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question