

[manuals.plus](#) /

› [VEVOR](#) /

› [VEVOR Baby Gate Instruction Manual \(Model W3312\)](#)

VEVOR W3312

VEVOR Baby Gate Instruction Manual

Model: W3312

1. IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before installing and using the VEVOR Baby Gate. Failure to follow these instructions could result in serious injury or death.

- **WARNING:** Never leave child unattended.
- **WARNING:** This gate is intended for use with children from 6 to 24 months.
- **WARNING:** Never use at the top of stairs without hardware mounting. For maximum stability and safety, hardware mounting is recommended for all stair applications.
- **WARNING:** To prevent serious injury or death, securely install gate or enclosure and use according to manufacturer's instructions.
- **WARNING:** The bottom bar of the gate can be a tripping hazard. Exercise caution when stepping over it.
- Always ensure the gate is securely latched before leaving a child or pet unsupervised.
- Regularly check all parts for wear, damage, or loose components. Discontinue use if any part is damaged.
- Do not use this gate to contain children or pets that can climb over, push open, or dislodge the gate.



Figure 1: VEVOR Baby Gate in a typical home setting.

2. PACKAGE CONTENTS

Verify that all components are present before beginning installation. If any parts are missing or damaged, contact VEVOR customer support.

- Main Gate Frame (1)
- Adjustable Tension Bolts (4)
- Wall Cups (4)
- Adhesive Pads for Wall Cups (4)
- Wall Mount Screws (4)
- Instruction Manual (1)

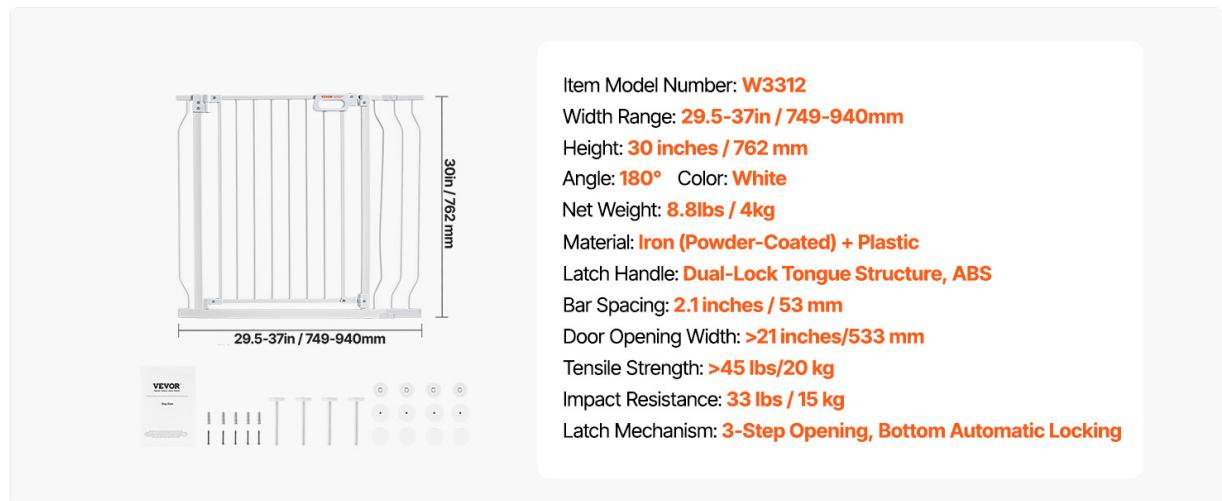


Figure 2: Included parts and dimensions for Model W3312.

3. INSTALLATION

The VEVOR Baby Gate offers two installation methods: pressure-mounted and hardware-mounted. Choose the method best suited for your application.

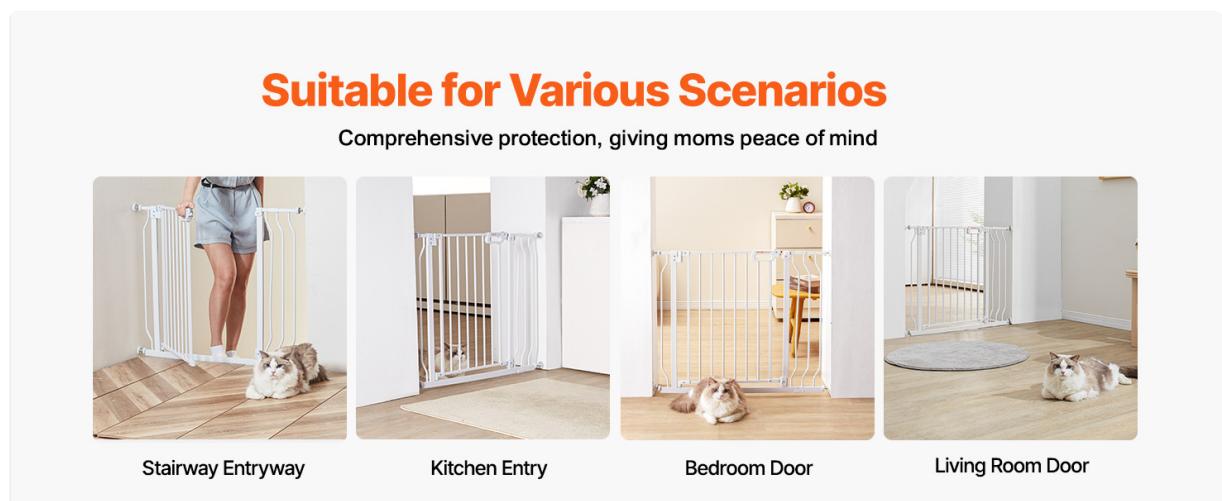


Figure 3: Dual installation options: Pressure-Mounted (top) and Hardware-Mounted (bottom).

3.1 Pressure-Mounted Installation (No-Drill)

This method is suitable for doorways and openings where drilling is not desired. It allows for easy relocation but is not recommended for the top of stairs.

1. Insert the four adjustable tension bolts into the holes at each corner of the gate frame.
2. Position the gate in the desired opening. Ensure the gate is centered and level.
3. Hand-tighten the tension bolts until all four wall cups touch the walls.
4. Continue to tighten the bolts evenly, turning each bolt a few rotations at a time, until the gate is securely fixed and does not move when pushed. The gap between the gate and the wall should be minimal.
5. Once secured, cut off the installation tag (if present) to confirm proper tension. The lock head should remain separated by default and close when the screw is tightened.

30M+

Users

50+

Countries

200+

Warehouses Worldwide

Figure 4: Detailed steps for Wall-Friendly No-Drill Installation.

3.2 Hardware-Mounted Installation

This method provides maximum stability and is required for installation at the top of stairs. It involves drilling small holes into the wall or door frame.

1. Follow steps 1 and 2 from the pressure-mounted installation to position the gate.
2. Mark the locations for the wall cups on the wall or door frame.
3. Remove the gate. Drill pilot holes at the marked locations using an appropriate drill bit for your wall material.
4. Attach the wall cups to the wall using the provided screws.
5. Re-insert the gate and tighten the tension bolts into the secured wall cups until the gate is firmly in place.

4. OPERATION

The VEVOR Baby Gate is designed for convenient and secure operation.

4.1 Opening the Gate

The gate features a one-hand operation mechanism for ease of use.

1. **Unlock the Safety Mechanism:** Press the button on the latch handle with your thumb.
2. **Lift the Gate Door:** While holding the button, lift the gate door slightly.
3. **Push the Door Forward:** Gently push or pull the gate door in the desired direction to open.



Top & Bottom Dual-Lock Design

Double the security



Figure 5: One-Hand Operation for opening the gate.

4.2 Closing and Auto-Close Feature

The gate is equipped with an auto-close function for added security.

- **Auto-Close:** If the gate is opened to an angle less than 90 degrees, it will automatically swing shut and lock.
- **Hold-Open Position:** If the gate is opened to an angle of 90 degrees or more, it will remain open, allowing for free passage. To close, simply push it gently until it swings back and latches.
- **Dual-Swing:** The gate door can swing open in both directions (180 degrees).



Figure 6: Gate features 180-degree dual-swing and auto-close functionality.

5. MAINTENANCE

To ensure the longevity and proper function of your VEVOR Baby Gate, follow these simple maintenance guidelines:

- **Cleaning:** Wipe the gate regularly with a damp cloth and mild soap. Avoid abrasive cleaners or solvents that could damage the finish.
- **Inspection:** Periodically check all screws, bolts, and connections to ensure they are tight and secure. Re-tighten if necessary.
- **Lubrication:** If the gate hinges become stiff, apply a small amount of silicone-based lubricant to the hinge points.

6. TROUBLESHOOTING

If you encounter issues with your VEVOR Baby Gate, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Gate does not close or latch properly.	Insufficient tension from pressure mounts; gate is not level.	Re-tighten the tension bolts evenly until the gate is secure and the latch aligns. Ensure the gate is level during installation.

Problem	Possible Cause	Solution
Gate feels wobbly or insecure.	Tension bolts are not tight enough; improper installation.	Ensure all four tension bolts are tightened firmly. For stair use, consider hardware mounting for increased stability.
Gate is difficult to open.	Latch mechanism is stiff; gate is overtightened.	Apply a small amount of silicone lubricant to the latch mechanism. Slightly loosen the tension bolts if the gate is too tight.
Gate leaves marks on walls.	Pressure mounting without protective pads.	Use the provided wall cups and adhesive pads to protect wall surfaces.

If these solutions do not resolve the issue, please contact VEVOR customer support for further assistance.

7. SPECIFICATIONS

Feature	Detail
Model Number	W3312
Width Range	29.5 - 37 inches (749 - 940 mm)
Height	30 inches (762 mm)
Material	Iron (Powder-Coated) + Plastic (ABS)
Color	White
Net Weight	8.8 lbs (4 kg)
Bar Spacing	2.1 inches (53 mm)
Door Opening Width	>21 inches (533 mm)
Latch Mechanism	3-Step Opening, Bottom Automatic Locking
Latch Handle	Dual-Lock Tongue Structure, ABS
Impact Resistance	33 lbs (15 kg)
Tensile Strength	>45 lbs (20 kg)
Mounting Type	Pressure Mount / Hardware Mount

8. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the official VEVOR website or contact their customer service directly. Keep your purchase receipt for warranty claims.

VEVOR Customer Service: Please visit www.vevor.com for contact details and support resources.

