Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Kassionel ARCS52A

Kassionel Replacement Remote Control (Model ARCS52A) User Manual

For Daikin FTXS and FTXL Series Air Conditioners

Introduction

This manual provides detailed instructions for the proper use and maintenance of your Kassionel ARCS52A replacement remote control. This remote is designed to be compatible with various Daikin FTXS and FTXL series room air conditioners. Please read this manual thoroughly before use to ensure optimal performance and longevity of your device.

Compatible Daikin Air Conditioner Models:

- FTXS15LVJU
- FTXS12LVJU
- FTXS09LVJU
- FTXL15QMVJU
- FTXL12QMVJU
- FTXL09QMVJU
- ARC452A3
- FTXS20J2V1B
- FTXS25J2V1B
- FTXS35J2V1B
- FTXS42J2V1B

Setup

1. Battery Installation

The remote control requires two (2) AAA alkaline batteries (not included). Follow these steps to install them:

1. Locate the battery compartment cover on the back of the remote control.
2. Slide the cover downwards to open the compartment.
3. Insert two new AAA alkaline batteries, ensuring the positive (+) and negative (-) terminals align correctly with the markings inside the compartment.

4. Slide the battery compartment cover back into place until it clicks securely.



Image: The remote control with its battery cover removed, illustrating the correct placement for two AAA batteries. The battery type (AAA) is indicated.

2. Initial Use

This replacement remote control is pre-programmed and does not require any setup or pairing with your Daikin air conditioner. Once batteries are installed, it is ready for immediate use.



Image: A hand holding the remote control, pointing towards an air conditioning unit. A wireless signal icon is visible, emphasizing that no programming is required for immediate use.

Operating Instructions

1. Power On/Off

Press the **ON/OFF** button (typically yellow) to turn the air conditioner on or off.

2. Temperature Adjustment and Unit Switching (°C/°F)

Use the **TEMP ▲** and **TEMP ▼** buttons to adjust the desired temperature. The remote supports display in both Celsius and Fahrenheit.
To switch between Fahrenheit (°F) and Celsius (°C) display:

- Press and hold both the **TEMP ▲** and **TEMP ▼** buttons simultaneously for approximately 5 seconds.
- The display will switch between Fahrenheit and Celsius.

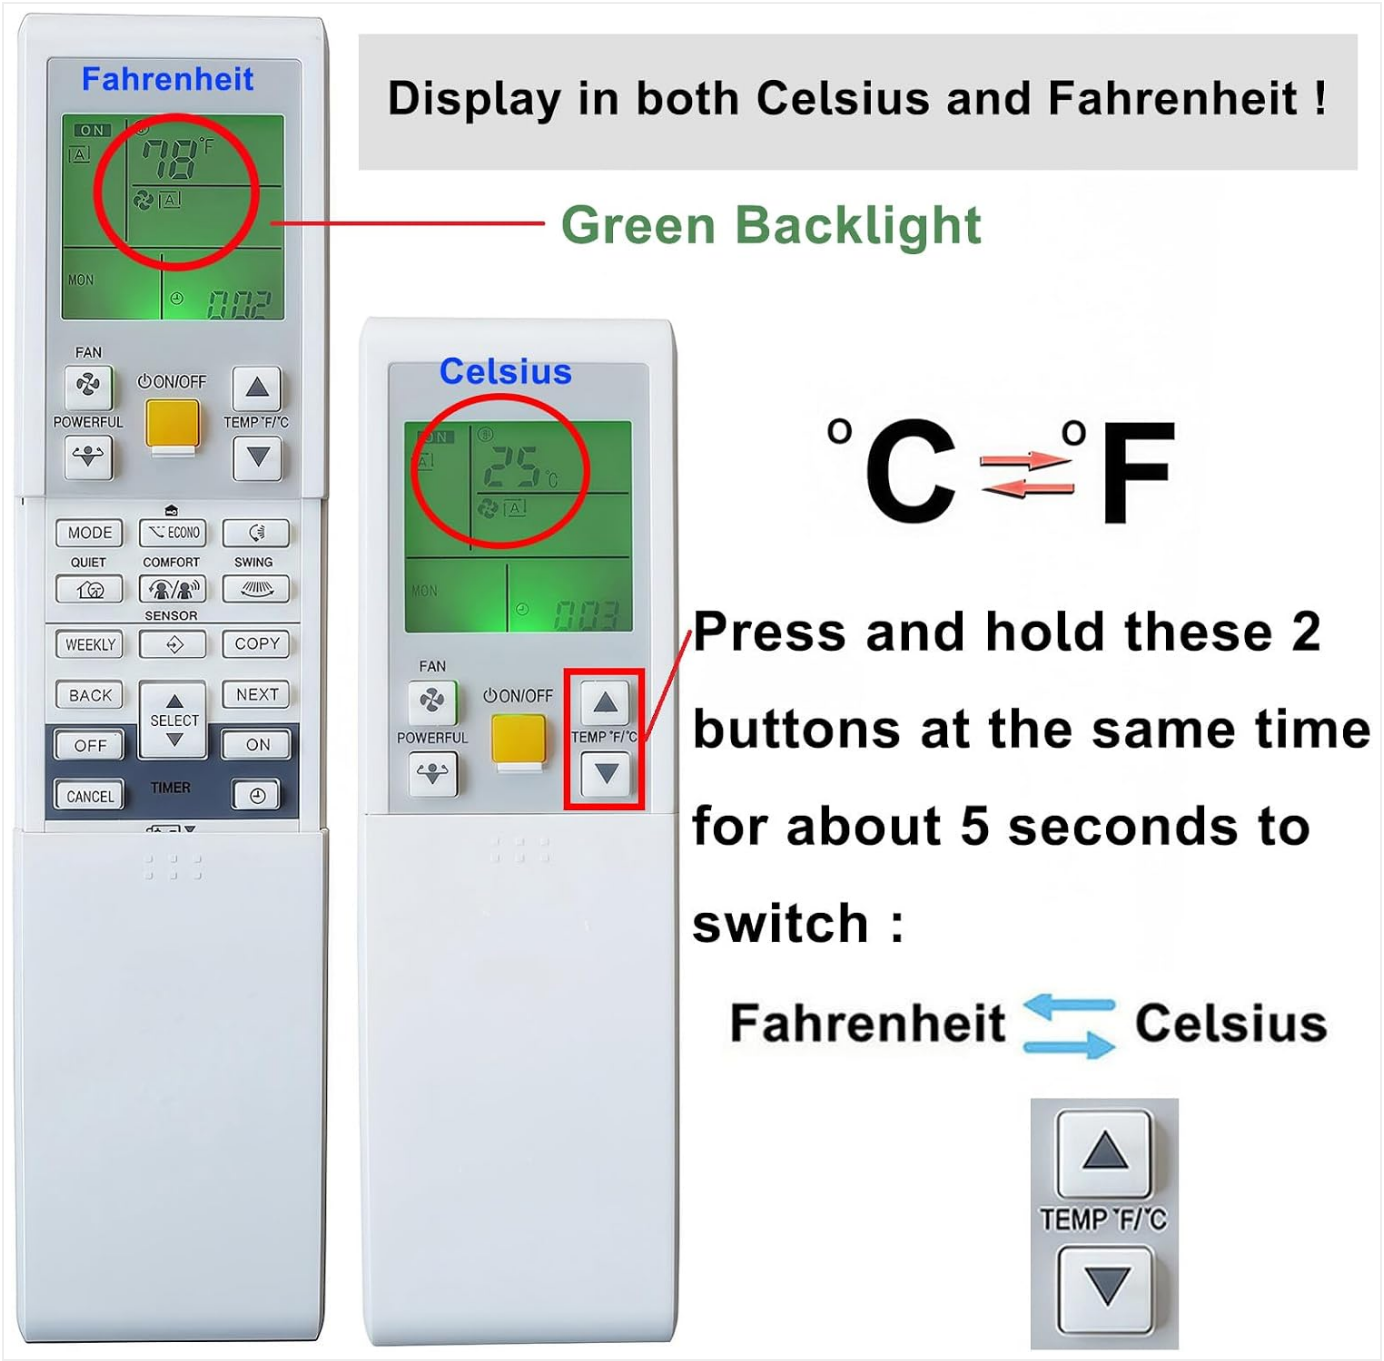


Image: Two remote control displays, one showing Fahrenheit and the other Celsius. Instructions highlight pressing the temperature up and down buttons simultaneously to toggle between temperature units.

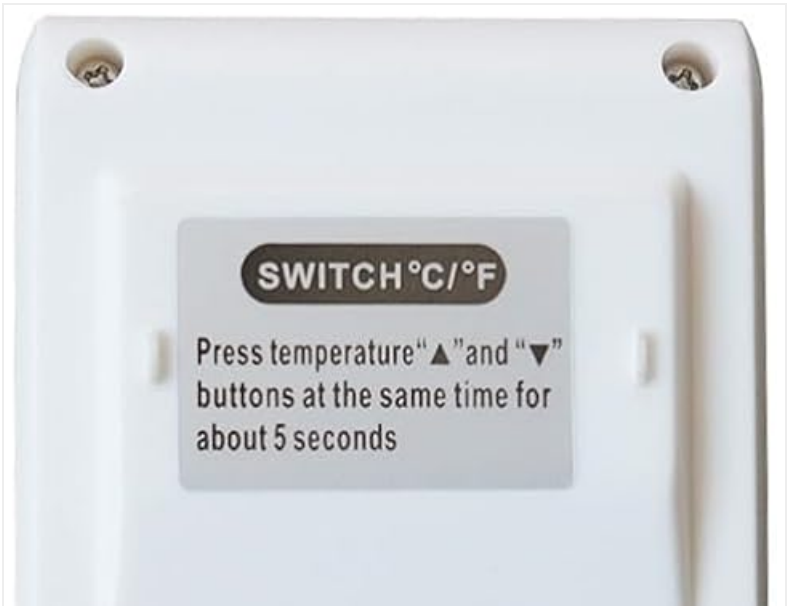




Image: The back of the remote control, showing a label that instructs users to press the temperature up and down buttons for approximately 5 seconds to switch between Celsius and Fahrenheit.

3. Mode Selection

Press the **MODE** button to cycle through available operating modes (e.g., Cool, Heat, Fan, Dry, Auto).

4. Fan Speed Adjustment

Use the **FAN** button to adjust the fan speed settings (e.g., Low, Medium, High, Auto).

5. Clock Setting

To set the current time and day:

1. Press the **CLOCK** button (often marked with a clock icon). The week display on the screen will start flashing.
2. Use the **SELECT ▲** or **SELECT ▼** buttons to adjust the day of the week (e.g., Monday, Tuesday, etc.).
3. Press the **CLOCK** button again. The time display will start flashing.
4. Use the **SELECT ▲** or **SELECT ▼** buttons to adjust the hour and minute.
5. Press the **CLOCK** button one more time to confirm and save the settings.

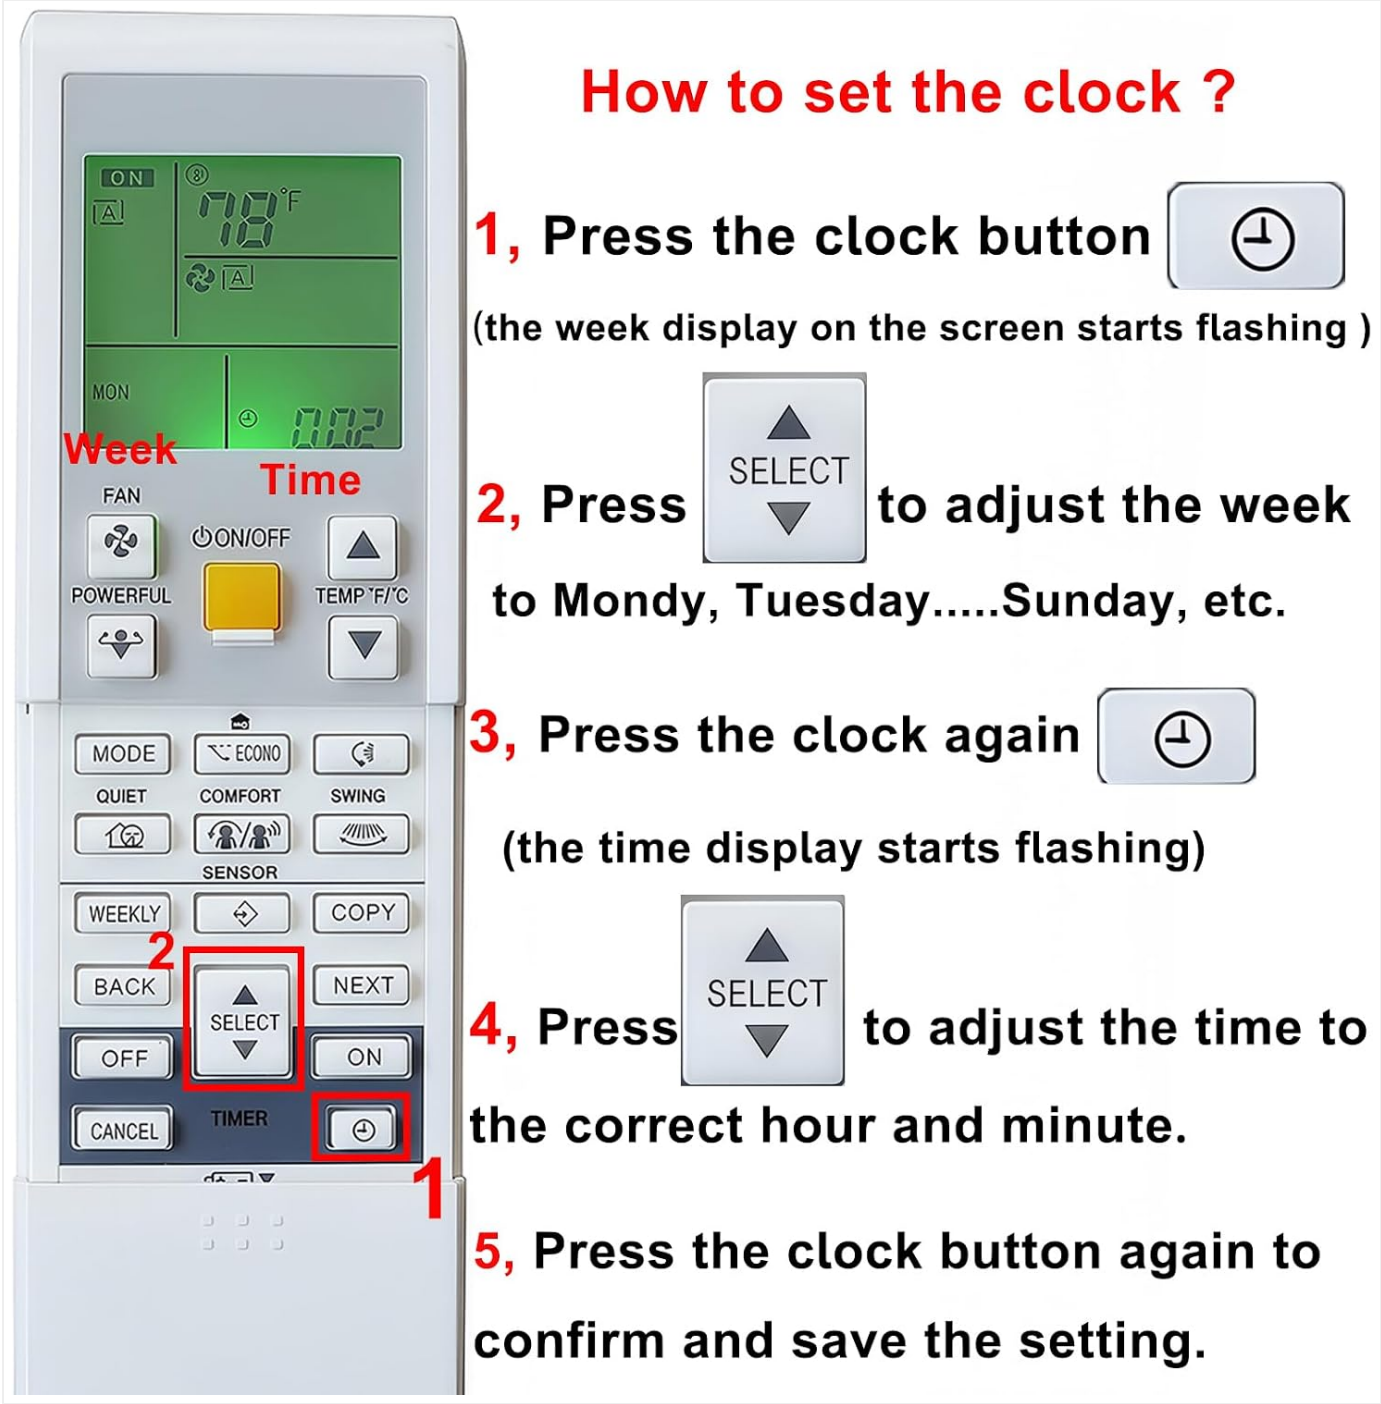


Image: A detailed view of the remote control's display and buttons, illustrating the step-by-step process for setting the clock, including adjusting the day and time.

6. Timer Functions

The remote control may include timer functions such as **TIMER ON** and **TIMER OFF**. Refer to your air conditioner's main manual for specific instructions on setting these timers, as their functionality can vary.

Maintenance

1. Cleaning the Remote Control

To clean the remote control, wipe it gently with a soft, dry cloth. Do not use liquid cleaners, abrasive materials, or chemical solvents, as these can damage the remote's surface or internal components.

2. Battery Replacement

Replace the batteries when the remote control's operating range decreases or if the display becomes dim or unresponsive. Always replace both batteries at the same time with new AAA alkaline batteries. Do not mix old and new batteries or different types of batteries.
Dispose of used batteries according to local regulations.

Troubleshooting

Remote Control Not Responding

- **Check Batteries:** Ensure batteries are inserted correctly with the correct polarity (+/-). Replace with new AAA alkaline batteries if necessary.
- **Obstruction:** Make sure there are no obstructions between the remote control and the air conditioner's receiver.
- **Distance:** Ensure you are within the maximum operating range (approximately 10 meters or 33 feet) of the air conditioner.
- **Infrared Sensor:** Verify that the infrared sensor on both the remote and the air conditioner is clean and unobstructed.

Display Issues

- **Dim Display:** This usually indicates low battery power. Replace the batteries.
- **No Display:** Check battery installation and ensure batteries are new.

Specifications

Feature	Detail
Brand	Kassionel
Model Number	ARCS52A
Compatible Devices	Daikin FTXS and FTXL Series Air Conditioners
Connectivity Technology	Infrared
Controller Type	Button Control
Special Feature	No Programming Required
Maximum Range	10 Meters (approx. 33 feet)
Batteries Required	2 x AAA Alkaline Batteries (not included)

Feature	Detail
Item Weight	98 Grams
Dimensions (L x W x H)	7.36" x 2.27" x 0.8"

Warranty and Support

Warranty Information

This Kassionel remote control comes with a **1-year warranty** from the date of purchase. This warranty covers manufacturing defects under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or battery leakage. Please retain your proof of purchase for warranty claims.

Customer Support

For any questions, technical assistance, or warranty claims, please contact Kassionel customer support through the retailer where the product was purchased. Provide your product model number (ARCS52A) and details of the issue for faster service.

© 2023 Kassionel. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DY5B6S4N

More documents and user manuals: **https://manuals.plus/**