



Manuals.plus /

› Larson /

› Larson Platinum Secure Glass Storm Door 32-in x 81-in White Linen Instruction Manual

## Larson B0DYLDX438

# Larson Platinum Secure Glass Storm Door Instruction Manual

Model: B0DYLDX438 | Size: 32-in x 81-in | Color: White Linen

## 1. INTRODUCTION

---

This manual provides detailed instructions for the installation, operation, and maintenance of your Larson Platinum Secure Glass Storm Door. Designed for superior security and durability, this door offers enhanced protection and energy efficiency for your home. Please read all instructions carefully before beginning installation or operation.

## 2. KEY FEATURES

---

- **Shatter-Resistant Security Glass:** Provides extra protection against break-ins.
- **Heavy-Duty Aluminum Frame:** Built to withstand daily use and harsh weather conditions.
- **Multi-Point Locking System:** Offers enhanced security for peace of mind.
- **Weather-Tight Seal:** Keeps out drafts, moisture, and insects.
- **Full-View Design:** Maximizes natural light and enhances curb appeal.
- **Pre-Assembled for Easy Installation:** Quick and easy setup in most door frames.
- **Energy Efficient:** Helps maintain indoor temperature and lower energy costs.
- **Rust-Resistant Finish:** Maintains its appearance over time.
- **Tempered Safety Glass:** Adds durability and strength for everyday use.

## 3. INSTALLATION GUIDE

---

The Larson Platinum Secure Glass Storm Door is designed for straightforward installation. While pre-assembled, careful measurement and adherence to these steps are crucial for optimal performance.


### 3.1. Measuring Your Opening

Accurate measurements ensure a proper fit. Measure the opening width horizontally at the top, middle, and bottom. Record the narrowest dimension. Measure the vertical opening height. A 3/4" x 3/4" deep mounting surface is required.

# LARSON

## PLATINUM COLLECTION MEASURING GUIDE

Measure the opening width (horizontally). Take three measurements, one across the top (A), middle (B) and bottom (C) of the door. Record the narrowest dimension. Measure the vertical opening height (D).

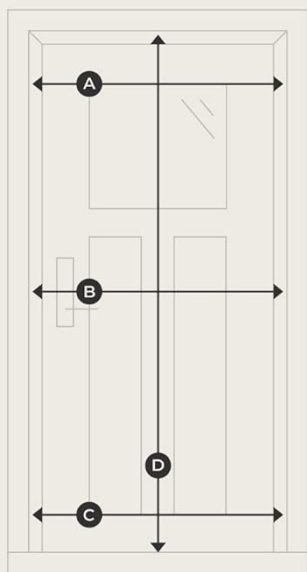

*3/4" x 3/4" Deep  
Mounting Surface  
is Required*

OPENING WIDTH	OPENING HEIGHT	DOOR SIZE YOU NEED
31 7/8" - 32 3/8"	80" - 81"	32" x 81"
35 7/8" - 36 3/8"	80" - 81"	36" x 81"

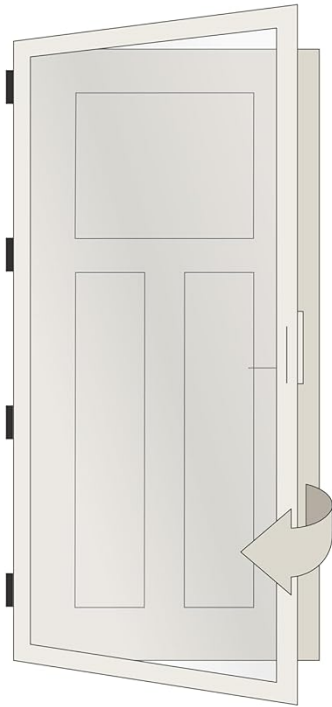


Image: Larson Platinum Collection Measuring Guide. This image displays a diagram for measuring door opening width (A, B, C) and height (D), indicating a required 3/4" x 3/4" deep mounting surface. A table shows recommended door sizes (32" x 81" or 36" x 81") based on opening width and height.


### 3.2. Door Handing

Your storm door is pre-hinged. Determine whether you need a Left-Hand (Right-Hinge) or Right-Hand (Left-Hinge) door. The handleset will be on the opposite side of the hinges.

# Pre-Hinged for Effortless Installation



When ordering, select **Right-Hand** (Left-Hinge)

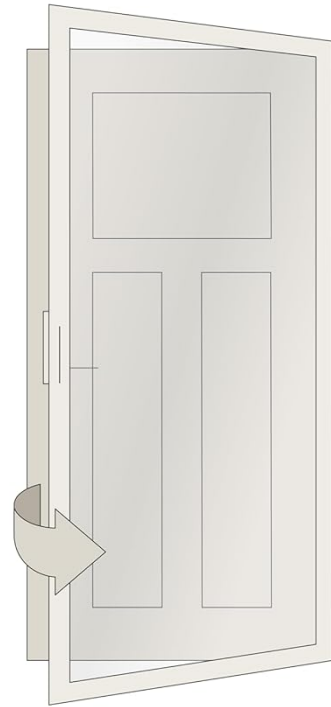

When ordering, select **Left-Hand** (Right-Hinge)

*Note: The handleset is on the opposite side of the hinge.*

**LARSON**

Image: Pre-Hinged for Effortless Installation. This diagram shows two storm doors, one configured for Right-Hand (Left-Hinge) and the other for Left-Hand (Right-Hinge) installation, with arrows indicating the swing direction.

### 3.3. General Installation Steps

While specific steps may vary, general installation involves:

1. Unpacking and inspecting all components.
2. Preparing the door frame opening.
3. Mounting the door frame to the existing door frame.
4. Attaching the door panel to the frame.
5. Installing the handleset and multi-point locking mechanism.
6. Adjusting for proper swing and seal.

Installation is designed to be quick, often taking only a few minutes with the right tools and preparation.

### 3.4. Security Features

The Platinum Secure Glass Storm Door features shatter-resistant glass and a multi-point locking system for enhanced home security.



SECURITY  
GLASS



Image: Larson Platinum Secure Glass Storm Door. This image shows a white Larson storm door with a prominent 'SECURITY GLASS' icon, installed on a modern white house, emphasizing its protective features.



Image: x3 Multi-Lock. This image provides an interior view of a storm door, with circles highlighting three distinct multi-lock points along the door frame, indicating enhanced security.

## 4. OPERATION

---

Your Larson Platinum Secure Glass Storm Door is designed for ease of use and versatility.

### 4.1. Opening and Closing

To open the door, depress the handleset lever and pull the door open. To close, gently push the door until the multi-point locking system engages securely. Ensure the door closes completely to maintain the weather-tight seal.

### 4.2. Handleset Operation

The QuickFit™ Handleset (sold separately) is required to operate the built-in deadbolt on Platinum Collection doors. Ensure your handleset is properly installed and functioning.



**LARSON**

## Finish Your Door

QuickFit™ Handleset sold separately and required to operate built-in deadbolt on Platinum Collection doors.

AVAILABLE FINISHES



Image: Finish Your Door. This image shows a close-up of a storm door handle with the Larson logo, and text indicating that QuickFit™ Handlesets are sold separately and are required for the built-in deadbolt. It also displays various available finishes for the handlesets.

## 5. MAINTENANCE

---

Regular maintenance will prolong the life and appearance of your storm door.

- **Cleaning:** Clean glass with a mild glass cleaner and a soft cloth. Clean the aluminum frame with mild soap and water. Avoid abrasive cleaners.
- **Lubrication:** Periodically lubricate hinges and moving parts of the handleset with a silicone-based lubricant to ensure smooth operation.
- **Weather-Tight Seal:** Inspect the weather-stripping annually for any signs of wear or damage. Replace if necessary to maintain energy efficiency.
- **Hardware Check:** Periodically check all screws and fasteners for tightness and tighten as needed.

## 6. TROUBLESHOOTING

---

If you encounter issues with your storm door, refer to the following common solutions:

- **Door sticks or is hard to open/close:** Check for debris in the track or hinges. Lubricate hinges and moving parts. Ensure the door frame is plumb and square.
- **Drafts or air leakage:** Inspect weather-stripping for damage or gaps. Adjust door sweep if necessary.
- **Handleset not engaging:** Check for obstructions. Ensure the multi-point lock mechanism is aligned. Refer to handleset specific instructions if applicable.
- **Squeaking noises:** Lubricate hinges with a silicone spray.

For persistent issues, contact Larson customer support.

## 7. SPECIFICATIONS

---

Attribute	Value
Brand	Larson
Model Number	BODYLDX438
Color	White
Material	Aluminum
Style	Contemporary
Item Weight	40.8 Pounds
UPC	092304174679
Required Assembly	Yes

## 8. OFFICIAL PRODUCT VIDEO

---

Watch the official Larson brand video for an overview of the Platinum Collection storm doors, highlighting features and benefits.

Video: Larson Brand Video. This video provides a general overview of Larson's Platinum Collection storm doors, showcasing their design, security features, and ease of installation. It features various models and colors, demonstrating how they enhance home entryways.

## 9. WARRANTY AND SUPPORT

---

Larson products are backed by a manufacturer's warranty. For specific warranty details, claims, or technical support, please refer to the documentation included with your product or visit the official Larson website. You can also contact Larson customer service directly for assistance.

**Larson Manufacturing Co.**

Visit the Larson Store on Amazon