

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Manuals.plus /

› [Uciefy](#) /

› Uciefy U26 Wireless RGB Gaming Mouse Instruction Manual

Uciefy U26

Uciefy U26 Wireless RGB Gaming Mouse Instruction Manual

Model: U26

1. PACKAGE CONTENTS

Verify that all items are present in the package:

- Uciefy U26 Triple Mode Gaming Mouse
- USB Receiver (stored at the bottom of the mouse)
- USB Type-C Charging Cable
- User Manual (this document)

2. PRODUCT OVERVIEW

The Uciefy U26 is a versatile gaming mouse offering three connectivity modes: wired, 2.4G wireless, and Bluetooth. It features adjustable DPI settings, customizable RGB lighting, and programmable buttons for an optimized user experience.

Triple Mode Gaming Mouse



Image: Uciety U26 mouse highlighting its triple connectivity modes: Wireless, Wired, and Bluetooth.

Button Layout

The mouse features 6 buttons and a scroll wheel:

- Left Click Button
- Right Click Button
- Scroll Wheel (Middle Click)
- DPI Cycle Button (typically below the scroll wheel)
- Forward Side Button
- Backward Side Button



Image: Diagram of the Uciefy U26 mouse showing the location of its 6 programmable buttons.

3. SETUP AND CONNECTIVITY

3.1 Initial Charging

Before first use, charge the mouse for approximately 2 hours using the provided USB Type-C cable. Connect the cable to the mouse's Type-C port and a USB power source. The indicator light will be red while charging and turn off when fully charged.



Image: The Uciefy U26 mouse being charged via its USB Type-C port.

3.2 Connectivity Modes

The mouse supports three modes: Wired, 2.4G Wireless, and Bluetooth. A mode switch button is located on the bottom of the mouse to select your preferred connection type.

3.2.1 Wired Mode

Connect the mouse directly to your computer using the provided USB Type-C cable. The mouse will function immediately, and it will also charge simultaneously.

3.2.2 2.4G Wireless Mode

1. Locate the USB receiver, which is stored in a compartment at the bottom of the mouse.
2. Plug the USB receiver into an available USB port on your computer.
3. Switch the mode selector on the bottom of the mouse to the "2.4G" position.
4. The mouse should connect automatically.

3.2.3 Bluetooth Mode

1. Switch the mode selector on the bottom of the mouse to the "BT" position.
2. On your computer or device, open Bluetooth settings and search for new devices.
3. Select "Uciefy U26" (or similar name) from the list of available devices to pair.
4. Follow any on-screen prompts to complete the pairing process.

4. OPERATION

4.1 DPI Adjustment

The mouse features 6 adjustable DPI levels (800-1200-1600-3200-4800-10000). Press the DPI cycle button (usually located below the scroll wheel) to switch between these settings. Each DPI level may correspond to a different LED color for easy identification.

ADJUSTABLE DPI LEVELS

Different DPI has different color



Image: Diagram illustrating the 6 adjustable DPI levels of the Uciefy U26 mouse.

4.2 RGB Backlight Modes

The mouse offers 7 RGB backlight modes to customize your gaming atmosphere. To switch between modes, press the scroll wheel and the backward side button simultaneously. You can also turn the RGB lighting off.

- Rainbow Steamer
- Breathing Light
- Single Light
- Neon
- Marquee
- Stationary Multi-color
- Colorful Wave
- Off

7 KINDS OF RGB LIGHT



Breathing
Mode



Colorful Streaming
Mode



Neon
Mode



Steady
Mode



Wave
Mode



Colorful Steady
Mode



LED
OFF

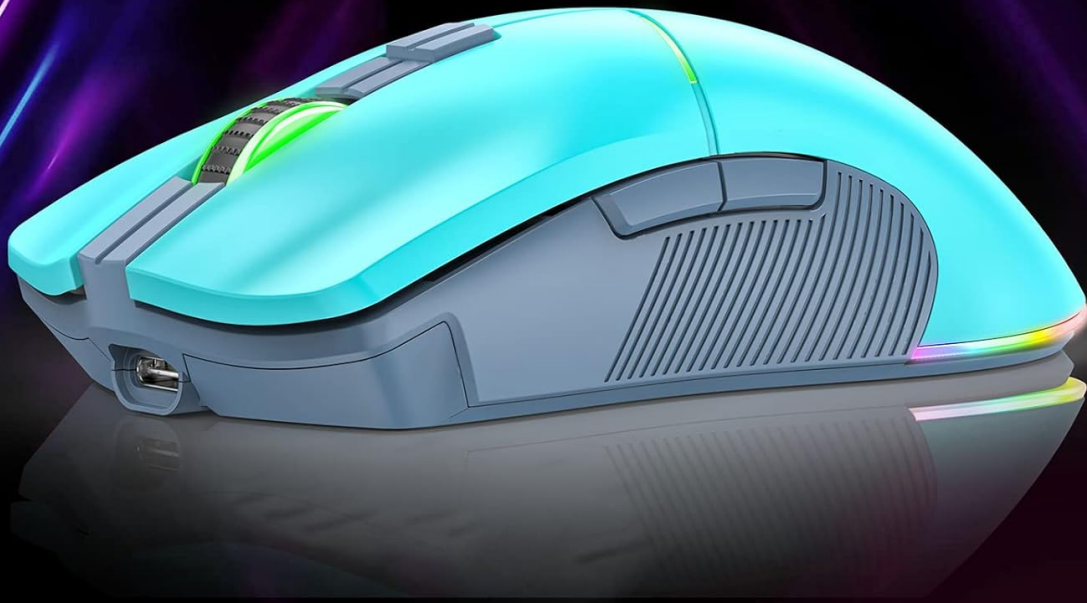


Image: Icons representing the 7 different RGB lighting modes available on the Uciefy U26 mouse.

4.3 Programmable Buttons

The Uciefy U26 mouse features 6 programmable buttons. To customize these buttons, you will need to download the dedicated software. Please contact the seller for the website link to download the software. The software is available in English and Chinese.

Note:

- The customization function is not available for macOS systems due to system restrictions. Basic mouse functions will still work on Apple computers/laptops.

5. MAINTENANCE

5.1 Charging

When the mouse cursor moves slowly or stops responding, it indicates a low battery. Connect the mouse using the Type-C charging cable to recharge. The indicator light will flash slowly red when the battery is low and remain solid red while charging. It will turn off once fully charged.

5.2 Cleaning

To maintain optimal performance, regularly clean the mouse surface and optical sensor with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.

6. TROUBLESHOOTING

6.1 Mouse Not Responding or Moving Slowly

- **Check Battery:** The battery may be low. Connect the mouse to the charging cable.
- **Check Connection:**
 - For Wired Mode: Ensure the Type-C cable is securely connected to both the mouse and the computer.
 - For 2.4G Wireless Mode: Ensure the USB receiver is properly plugged into a USB port and the mouse is switched to 2.4G mode. Try a different USB port.
 - For Bluetooth Mode: Verify that Bluetooth is enabled on your device and the mouse is correctly paired and selected in your device's Bluetooth settings. Ensure the mouse is switched to BT mode.
- **Surface Compatibility:** The mouse may not work effectively on certain surfaces, particularly black fabric mouse pads or soft, uneven surfaces. Try using the mouse on a hard, flat surface or a dedicated mouse pad.

6.2 Programmable Buttons Not Working on macOS

The customization software for programmable buttons is not compatible with macOS due to system limitations. Basic mouse functions (left/right click, scroll, DPI adjustment) will still operate.

6.3 RGB Lights Not Functioning

- Ensure the RGB lights have not been turned off. Press the scroll wheel and backward button simultaneously to cycle through modes, including the "Off" setting.
- Check battery level; low battery might affect RGB functionality.

7. SPECIFICATIONS

Feature	Detail
Model	U26
Connectivity Technology	Bluetooth, 2.4G Wireless, Wired (USB Type-C)
DPI Levels	800, 1200, 1600, 3200, 4800, 10000
Programmable Buttons	6
RGB Backlight Modes	7 modes + Off
Movement Detection	Optical
Product Dimensions	5 x 2.6 x 1.5 inches
Item Weight	3.52 ounces

Battery	1 Product Specific battery (included)
Compatibility	Windows XP/7/8/Vista, Notebook/PC/Laptop/Computer/Macbook (basic functions)

8. WARRANTY AND SUPPORT

8.1 Warranty Information

Specific warranty details for the Uciefy U26 mouse are not provided in this manual. Please refer to the product packaging, the seller's website, or contact Uciefy customer support for comprehensive warranty information.

8.2 Customer Support

For technical assistance, troubleshooting, or inquiries regarding the programmable button software, please contact Uciefy customer support or the seller directly. Contact information can typically be found on the product packaging or the official Uciefy website.

For software download, please contact the seller for the official website link.