Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

XElectron C9 Plus

XElectron C9 Plus Smart Projector User Manual

Model: C9 Plus | Brand: XElectron

1. Introduction

Welcome to the XElectron C9 Plus Smart Projector user manual. This guide provides essential information for setting up, operating, and maintaining your projector. The XElectron C9 Plus is an advanced smart projector featuring Android 12, native Full HD 1080P resolution with 4K support, auto focus, auto keystone correction, and versatile connectivity options including WiFi and Bluetooth 5.1. Please read this manual thoroughly before use to ensure optimal performance and longevity of your device.

2. What's in the Box

Upon opening your XElectron C9 Plus Smart Projector package, please verify that all the following items are included:

- Projector
- HDMI Cable
- Remote Control
- Power Cord
- User Manual (this document)
- Warranty Card

3. Product Features

The XElectron C9 Plus Smart Projector is equipped with a range of features designed for a superior viewing experience:

- **Display:** Native 1080P Full HD resolution with 4K support, up to 635 cm (250 inch) screen size, 10000:1 dynamic contrast ratio, 12600 Lumens (800 ANSI) brightness, 16:9 and 4:3 aspect ratio, 50,000 hours lamp life.
- **Connectivity:** Dual-band WiFi for screen mirroring (Airplay, Miracast), Bluetooth 5.1, 2x HDMI ports, 2x USB ports, WAN port for internet, 3.5mm Audio Out port.
- **Audio:** Integrated 10 Watt stereo speaker, Bluetooth for wireless speaker connection, 3.5mm audio out for external speakers or headphones.
- **Smart Features:** Android 12 operating system, 1GB RAM, 8GB internal memory, pre-installed streaming apps (Netflix, Prime Video, Hotstar, YouTube), 100% NTSE & PAL decoding.
- **Advanced Correction:** Auto Focus, Auto Keystone correction for perfect screen alignment, Auto Obstacle Avoidance.

4. Setup Guide

4.1 Unpacking and Placement

Carefully remove the projector and all accessories from the packaging. Place the projector on a stable, flat surface. Ensure adequate ventilation around the device.



Image: The XElectron C9 Plus projector can be mounted on a ceiling, placed on a table, or set up on a tripod for flexible installation.

4.2 Power Connection

Connect the provided power cord to the projector's power input and then to a suitable electrical outlet (AC 220V). The projector is a plug-and-play device, requiring no complex installation.

4.3 Initial Power On

Press the power button on the projector or the remote control to turn on the device. The projector will initiate its boot sequence.

4.4 Focus and Keystone Adjustment

The C9 Plus features **Auto Focus** and **Auto Keystone** correction. Upon startup, the projector will automatically adjust the image for clarity and a rectangular shape. Manual adjustments can be made if necessary via the settings menu.



Image: The projector automatically adjusts focus and keystone for a clear, perfectly aligned picture.

5. Operating Instructions

5.1 Navigating the Android 12 Interface

The projector runs on Android 12. Use the remote control to navigate the home screen, access pre-installed applications like Netflix, YouTube, Prime Video, and Hotstar, or download new apps from the app store.



Image: The Android 12 interface provides access to popular streaming services and applications.

5.2 Connecting External Devices

The C9 Plus offers multiple connectivity options:

- **HDMI:** Connect devices such as TV set-top boxes, Fire TV Stick, PCs/laptops, DVD players, or gaming consoles.
- **USB:** Plug in hard drives or other USB storage devices to play media directly.
- **WAN:** Connect an Ethernet cable for a stable internet connection.
- **Audio Out (3.5mm Jack):** Connect external speakers or headphones for enhanced audio.

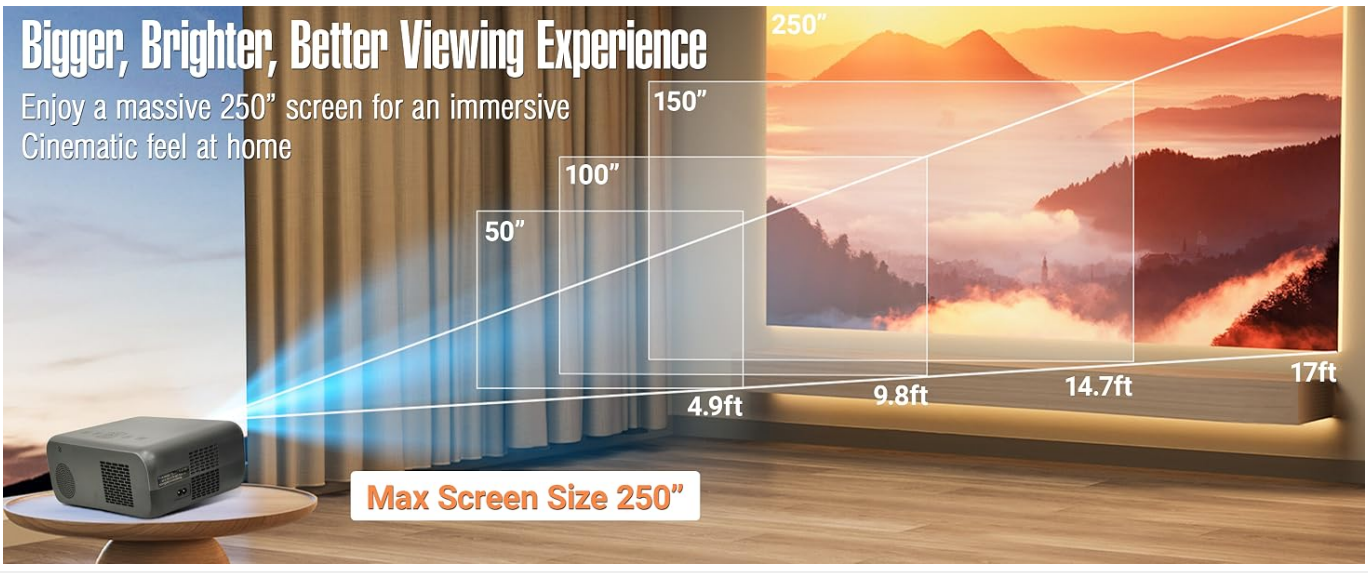


Image: Seamless connectivity with HDMI, USB, Audio Out, Dual WiFi, and Bluetooth 5.1.

5.3 Wireless Screen Mirroring (WiFi)

Utilize the dual-band 5G+2.4G WiFi for screen mirroring from your smartphone or tablet via Airplay (iOS) or Miracast (Android). This allows you to project content directly from your mobile device.

5.4 Bluetooth Audio

Connect external Bluetooth speakers or headphones to the projector via Bluetooth 5.1 for a more immersive audio experience. The built-in 10W speaker provides clear sound for general use.

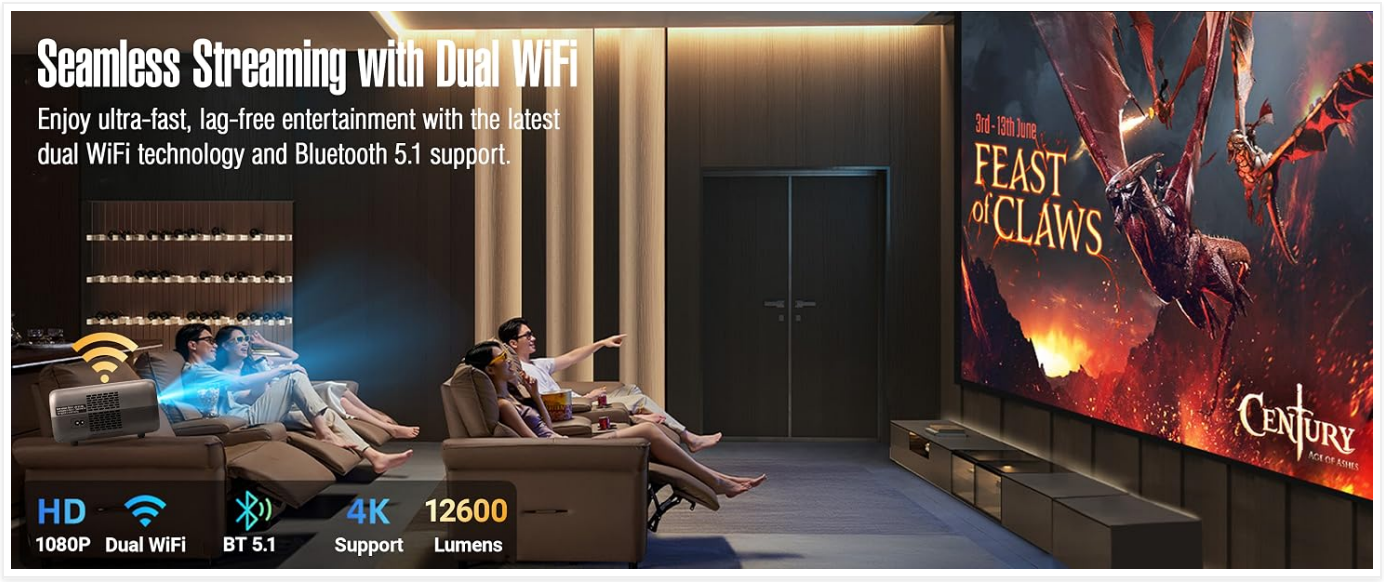


Image: Experience stable, high-fidelity audio with Bluetooth 5.1 and seamless streaming with Dual WiFi.

6. Maintenance

Proper maintenance ensures the longevity and optimal performance of your projector:

- **Cleaning the Lens:** Use a soft, lint-free cloth specifically designed for optical lenses. Avoid abrasive materials or harsh chemicals.
- **Dust Removal:** Regularly clean the projector's vents to prevent dust buildup, which can affect cooling and performance. Use a soft brush or compressed air.
- **Storage:** When not in use for extended periods, store the projector in a cool, dry place, away from direct sunlight and extreme temperatures. Use the lens cap to protect the lens.
- **Lamp Life:** The projector lamp has a life expectancy of 50,000 hours. Ensure proper ventilation to maximize lamp life.

7. Troubleshooting

If you encounter issues with your XElectron C9 Plus Projector, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No Power	Power cord not connected, power outlet faulty.	Ensure power cord is securely connected. Test outlet with another device.
No Image	Input source not selected, cable connection loose, lens cap on.	Select correct input source. Check HDMI/USB cable connections. Remove lens cap.
Blurry Image	Out of focus, incorrect keystone.	Allow auto focus to complete. Manually adjust focus/keystone if needed via settings.

Problem	Possible Cause	Solution
No Sound	Volume too low, external audio device not connected/selected.	Increase volume. Check 3.5mm audio out or Bluetooth connections.
Screen Mirroring Fails	WiFi connection unstable, device incompatibility.	Ensure strong WiFi signal. Restart both projector and source device. Check device compatibility with Airplay/Miracast.

If the problem persists after attempting these solutions, please contact XElectron customer support.

8. Specifications

Detailed technical specifications for the XElectron C9 Plus Smart Projector:

Feature	Detail
Brand	XElectron
Model Number	C9 Plus
Native Resolution	1920 x 1080 (Full HD)
Supported Resolution	Up to 3840 x 2160 (4K)
Brightness	12600 Lumens (800 ANSI)
Dynamic Contrast Ratio	10000:1
Max Screen Size	635 cm (250 Inches)
Lamp Life	50,000 Hours
Operating System	Android 12
RAM	1GB
Internal Memory	8GB
WiFi	Dual-band (5G+2.4G) for Screen Mirroring (Miracast, Airplay)
Bluetooth	5.1
HDMI Ports	2
USB Ports	2
Audio Out	3.5mm Jack
Built-in Speaker	10 Watt Stereo
Auto Correction	Auto Focus, Auto Keystone, Auto Obstacle Avoidance
Product Dimensions	22 x 16.5 x 8.6 cm

Feature	Detail
Item Weight	1.36 kg
Power Source	AC
Voltage	220V
Wattage	60 Watts

9. Warranty and Support

XElectron India provides a **1-Year Warranty** from the date of purchase for the C9 Plus Projector. Product registration is mandatory to avail warranty benefits. For detailed warranty terms and conditions, please visit the official XElectron website. For technical support, service requests, or any inquiries, please contact XElectron customer service:

- **Manufacturer:** Xelectron Technologies Pvt Ltd, New Delhi, India
- **Contact Numbers:** 0120-4134583, 8527312304
- **Address:** UG-SR1B, Ansal Plaza, Vaishali, Ghaziabad, India

XElectron is committed to providing prompt and efficient customer support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0B157FRGG

More documents and user manuals: **https://manuals.plus/**