



Manuals.plus /

› Fanbulous /

› Fanbulous 60 Inch Fandelier Ceiling Fan Instruction Manual F-OG60BK-1D01

Fanbulous F-OG60BK-1D01

Fanbulous 60 Inch Fandelier Ceiling Fan Instruction Manual

Model: F-OG60BK-1D01 | Brand: Fanbulous

1. IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before beginning installation. Failure to follow these instructions could result in electric shock, fire, or personal injury.

- Always disconnect power at the main circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, or national electrical codes. If you are unfamiliar with electrical wiring, consult a qualified electrician.
- Ensure the installation site can support the fan's weight (approximately 27.9 pounds).
- Do not operate the fan with damaged wiring or if any parts are missing.
- Keep hands, clothing, and other objects clear of the fan blades when the fan is in operation.

2. PACKAGE CONTENTS


Verify that all components listed below are included in your package. If any parts are missing or damaged, contact customer service before proceeding with installation.

- Fan Motor Housing with Light Kit
- Fan Blades (5 pieces, reversible Black/Wood Grain)
- Downrods (5-inch and 10-inch options)
- Canopy and Mounting Bracket
- Remote Control with Wall Mount Holder
- Crystal Strands and Accents
- Hardware Pack (screws, wire nuts, washers)
- Instruction Manual

3. SPECIFICATIONS

Feature	Detail
Brand	Fanbulous
Model Number	F-OG60BK-1D01
Size	60 Inch
Color	Black & Wood Grain
Power Source	DC Motor
Wattage	40 watts (Fan)
Light Output	18W + 10W LED (2100 lumens)
Color Temperature (CCT)	3000K (Warm), 4500K (Natural), 6000K (Cool)
Control Method	Remote Control
Fan Speeds	6
Timer Functions	1/4/8 Hours
Motor Type	Quiet Reversible DC Motor
Mounting Type	Downrod Mount
Indoor/Outdoor Usage	Indoor
Item Weight	27.9 pounds

Energy Guide

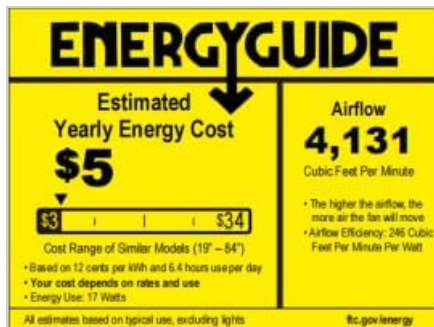

The EnergyGuide label indicates an estimated yearly energy cost of \$5 and an airflow of 4,131 Cubic Feet Per Minute, with an airflow efficiency of 246 Cubic Feet Per Minute Per Watt.

4. INSTALLATION AND SETUP

This ceiling fan is designed for straightforward installation. Refer to the detailed step-by-step instructions provided in the separate installation guide for comprehensive instructions. Below are key considerations:

4.1 Mounting Options and Dimensions

The fan comes with adjustable 5-inch and 10-inch downrods to accommodate various ceiling heights. It is suitable for low ceilings, standard ceilings, and slanted ceilings (up to 15 degrees).

3-Color Temperatures Led Lights



This image illustrates the overall dimensions of the 60-inch ceiling fan, including the blade span and the two available downrod lengths (5 inches and 10 inches). It also indicates suitability for various room sizes, recommending it for rooms up to 18x18 feet.

4.2 Blade Installation

The fan blades are reversible, offering a choice between a black finish and a wood grain finish. Select your preferred side before attaching them to the motor housing.



This image details the exquisite crystal design of the fan's light fixture, featuring a dual-layer crystal structure and elegant crystal accents. It also shows the classic blade mount design.

5. OPERATION

The Fanbulous Fandelier Ceiling Fan is operated using the included multi-function remote control.

5.1 Remote Control Functions

The remote control allows you to manage all fan and light settings conveniently.

- **Power On/Off:** Turns the fan and light on or off.
- **Fan Speed:** Adjusts between 6 fan speeds (1-6).
- **Light Color Temperature (CCT):** Cycles through Warm White (3000K), Natural White (4500K), and Cool White (6000K).
- **Timer:** Sets the fan to turn off automatically after 1, 4, or 8 hours.
- **Reversible Function:** Changes the direction of blade rotation for summer or winter modes.

Quiet Enjoyment with DC Motor

Low dB Energy-efficient 1/2/4/8H Timing

10dB Breathe

20dB Library

30dB Operation Decibel

40dB Whisper

60dB Talk

This image displays the remote control and its key features, including 6 wind speeds, quiet operation, DC motor functionality, and timer settings for 1, 4, or 8 hours.

5.2 Light Color Temperature Adjustment (3CCT)

The integrated LED light offers three distinct color temperatures to suit different moods and activities.

- **Warm White (3000K):** Ideal for creating a cozy and relaxing atmosphere.
- **Natural White (4500K):** Provides a balanced and neutral light, suitable for general tasks.
- **Cool White (6000K):** Offers bright, crisp illumination, perfect for focused activities.

Exquisite Crystal Design



*Dual-layer
Crystal Design*



*Elegant
Crystal Accents*



*Classic Blade
mount Design*

This image demonstrates the three available light color temperatures: 3000K (Warm Light), 4500K (Natural Light), and 6000K (Cold White Light), illustrating how the fan can meet various lighting demands.

5.3 Reversible DC Motor Function

The quiet DC motor features a reversible function to optimize air circulation throughout the year.

- **Summer Mode (Forward):** Blades rotate counter-clockwise to create a downward airflow, producing a cooling effect.
- **Winter Mode (Reverse):** Blades rotate clockwise to create an upward airflow, circulating warm air trapped near the ceiling.

This diagram visually explains the reversible function of the DC motor, showing how the fan delivers cool air in summer with forward rotation and circulates warm air in winter with reverse rotation, alongside the 6-speed adjustment options.

5.4 Quiet Operation

The DC motor ensures quiet operation, with noise levels below 30 decibels, promoting an undisturbed environment.

2 Colors in One Blade



This infographic highlights the quiet performance of the DC motor, illustrating that its operation decibel level is around 30dB, comparable to a quiet whisper and significantly lower than typical conversation.

6. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning Blades:** Use a soft, damp cloth to wipe dust from the fan blades. Avoid harsh chemicals that may damage the finish.
- **Cleaning Light Fixture:** Gently wipe the crystal shade with a soft, lint-free cloth. For stubborn dirt, a slightly damp cloth with mild soap can be used, followed by drying.
- **Tightening Screws:** Periodically check and tighten all screws on the fan assembly to ensure secure operation.
- **No Lubrication Needed:** The DC motor is permanently lubricated and does not require additional oiling.

7. TROUBLESHOOTING

If you encounter any issues with your fan, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low.	Check circuit breaker; Ensure all wires are securely connected; Replace remote control batteries.
Light does not work	Loose wire connection to light kit; LED driver issue.	Check light kit wiring; Contact customer service if LED driver is suspected.
Fan wobbles	Loose blade screws; Unbalanced blades; Loose mounting bracket.	Tighten all blade screws; Use a balancing kit (not included) to balance blades; Ensure mounting bracket is securely fastened.
Noisy operation	Loose screws; Fan not properly seated; Obstruction.	Check and tighten all screws; Ensure fan is correctly installed on the mounting bracket; Remove any obstructions near the blades.
Remote control not working	Low battery; Remote not paired; Obstruction between remote and receiver.	Replace batteries; Refer to pairing instructions in the full manual; Ensure clear line of sight to the fan's receiver.

If these steps do not resolve the issue, please contact Fanbulous customer service for further assistance.

8. WARRANTY AND SUPPORT

Fanbulous stands behind the quality of its products.

- **Motor Warranty:** A 5-year warranty is provided for the fan motor.
- **Parts Warranty:** A 2-year service warranty covers other parts of the fan.
- **Customer Service:** Our dedicated 24-hour customer service team is available to assist you with any questions or concerns.

For warranty claims or technical support, please contact us via:

- **Email:** support@fanbulous.com (example)
- **Phone:** 1-800-XXX-XXXX (example)
- **Website:** www.fanbulous.com/support (example)