

[manuals.plus](#) /

› [GONEO](#) /

› [GONEO Universal Travel Adapter GN-L10U15A Instruction Manual](#)

GONEO GN-L10U15A

GONEO Universal Travel Adapter GN-L10U15A Instruction Manual

Model: GN-L10U15A



1. INTRODUCTION

The GONEO Universal Travel Adapter GN-L10U15A is designed to provide power connectivity for your electronic devices in various countries worldwide. This compact adapter features multiple plug types, AC outlets, and USB charging ports, making it a versatile solution for international travel.



Image 1.1: Front view of the GONEO Universal Travel Adapter, showcasing its compact design and integrated USB ports.

2. IMPORTANT SAFETY INFORMATION

WARNING: This product only converts the socket shape; it does not convert voltage. Ensure your devices are dual-voltage (100V-240V) or compatible with the local voltage. Using devices that require voltage conversion may cause damage to the device or the adapter.

The GONEO Universal Travel Adapter incorporates multiple safety features to protect your devices:

- Over-temperature Protection
- Over-voltage Protection
- Overcurrent Protection
- Overcharge Protection
- Short-circuit Protection
- Undervoltage Protection
- Overload Protection

- Chip Protection

8 Circuit Protections



Overtemperature Protection



Overvoltage Protection



Overcurrent Protection



Overcharge Protection



Short-circuit Protection



Undervoltage Protection



Overload Protection



Chip Protection



Protection Gate for Children



Fireproof PC Material

Image 2.1: Visual representation of the eight circuit protection mechanisms integrated into the adapter for enhanced safety.

3. PRODUCT OVERVIEW

3.1 Components

The adapter features:

- 1 Universal AC Socket
- 1 USB-A Port (5V 2.4A)
- 1 USB-C Port (5V 3A)
- 1 Type-A Socket (for specific regions)

Universal Compatibility




Image 3.1: Close-up view of the adapter, highlighting the USB-A and USB-C charging ports.

3.2 Plug Types

The adapter integrates retractable plugs for compatibility with major international standards:

- European (EU)
- United Kingdom (UK)
- United States (US)
- Australia (AU)

Your Global Charging Passport

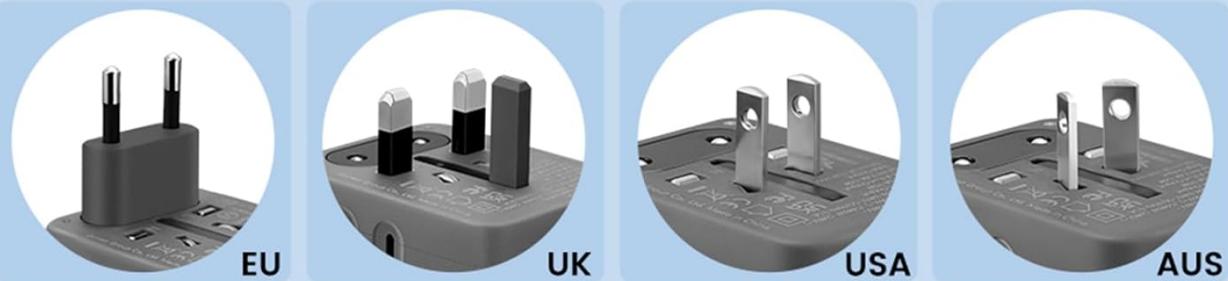

Universal AC Socket

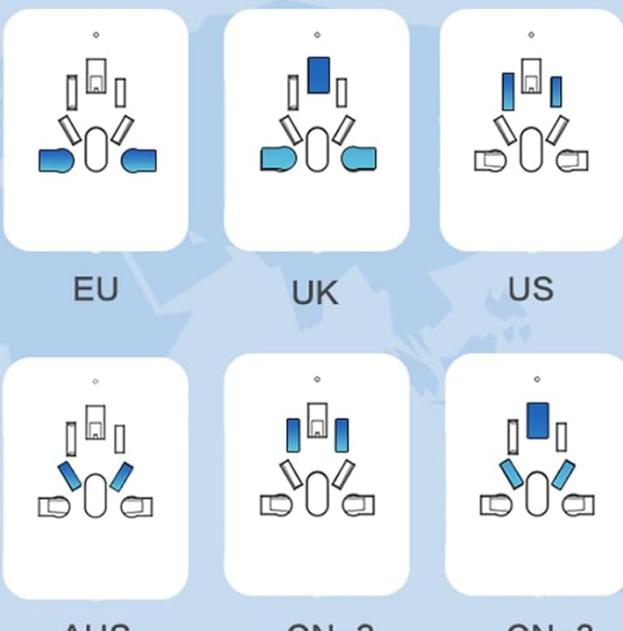


Image 3.2: Illustration of the various integrated plug types (EU, UK, US, AU) and the universal AC socket design.

4. SETUP AND OPERATION

4.1 Selecting the Correct Plug

1. Identify the required plug type for your destination country.
2. Slide the corresponding plug selector on the side of the adapter to extend the correct pins.
3. Ensure the other plug types are fully retracted before inserting the adapter into a wall socket.

4.2 Connecting Devices

1. Once the adapter is securely plugged into a wall outlet, connect your device's power cord to the universal AC socket.
2. For USB-powered devices, connect your USB cable to either the USB-A or USB-C port.
3. The adapter supports charging up to 4 devices simultaneously (1 AC, 1 USB-A, 1 USB-C, 1 Type-A).

 **15W**
USB-C

 **12W**
USB-A

 **600W-1440W**
Universal
AC Outlet

 **600W-1440W**
USA
AC Outlet



Image 4.1: The adapter in use, demonstrating simultaneous charging of a phone and tablet via USB ports while an AC device is also connected.

5. AUTOMATIC RESET FEATURE

The GONEO Universal Travel Adapter features an automatic reset mechanism. In the event of an overload, the adapter will temporarily cease operation to protect connected devices and itself. Unlike traditional fuses that require manual replacement, this adapter will automatically reset after approximately 10 seconds once the overloaded device is removed or replaced with one within the rated power range.


10000 Times Safe Auto Reset

Enhanced Safety No Fuse Required

Available Uses: 10000 times



The auto reset indicator

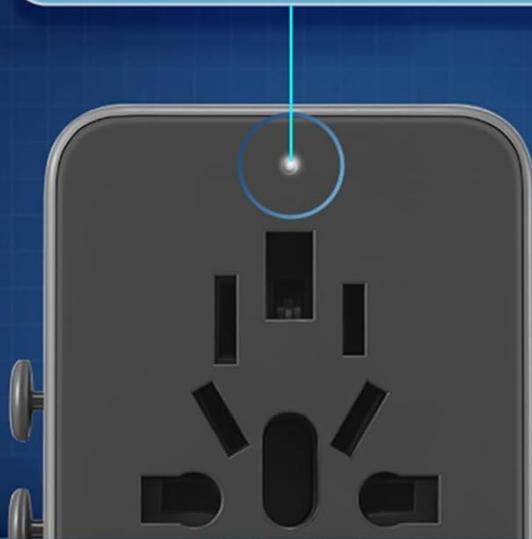

VS

Replace the fuse:

In the event of an overload, manual fuse replacement is required.

Available Uses: twice



Image 5.1: Comparison highlighting the convenience and safety of the automatic reset feature over traditional, replaceable fuses.

6. COMPATIBILITY

This adapter is compatible with devices operating within a voltage range of 100V to 240V. It is suitable for charging various electronic devices such as smartphones, tablets, laptops, cameras, and other USB-powered gadgets.

Portable and Lightweight



Image 6.1: Examples of devices compatible with the adapter, including laptops, smartphones, cameras, and electric toothbrushes.

7. CARE AND MAINTENANCE

- Keep the adapter dry and clean. Avoid exposure to moisture or extreme temperatures.
- Clean the adapter with a soft, dry cloth. Do not use liquid cleaners or abrasive materials.
- Store the adapter in a cool, dry place when not in use.
- Do not attempt to disassemble or modify the adapter.

8. TROUBLESHOOTING

8.1 Adapter Not Providing Power

- **Check Wall Socket:** Ensure the wall socket is active and providing power.
- **Plug Connection:** Verify that the correct plug type is fully extended and securely inserted into the wall socket.
- **Device Connection:** Confirm that your device's cable is properly connected to the adapter.
- **Overload Reset:** If the adapter stopped working, it might have triggered the automatic reset due to an

overload. Remove the connected device, wait 10 seconds, and then reconnect a device within the rated power.

8.2 Device Not Charging

- **Device Compatibility:** Ensure your device is compatible with the local voltage and the adapter's output specifications.
- **Cable Integrity:** Try a different charging cable to rule out a faulty cable.
- **Adapter Ports:** Test different USB ports or the AC socket to identify if a specific port is affected.

9. SPECIFICATIONS

Feature	Specification
Model	GN-L10U15A
Input	6A MAX, 100V-240V~
Output (AC)	600W (100V~) / 1440W (240V~)
USB Input	100V-240V~ 50/60Hz 0.5A
USB-C Output	5V 3A
USB-A Output	5V 2.4A
Total USB Output	5V 3A MAX
Plug Types	EU, UK, US, AU
Dimensions (L x W x H)	6.35 x 5.08 x 5.08 cm (2.5 x 2.0 x 2.0 inches)
Weight	168 g
Material	Fireproof PC Material
Certificates	UKCA, RoHS, CE, FCC

Product Specification



Input	6A MAX, 100V-240V~
Output	600W (100V~) /1440W (240V~)
USB input	100V-240V~ 50/60Hz 0.5A
USB-C output	5V 3A
USB-A output	5V 2.4A
Total output	5V 3A MAX
Plug Type	EU,UK,US,AU
Certificate	UKCA, ROHS, CE, FCC
Dimensions	63.5*49*55mm/2.5*1.93*2.17inches

Image 9.1: The adapter shown in hand, illustrating its compact and portable dimensions for travel.

10. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the product packaging or contact GONEO customer service through the retailer where the product was purchased. Keep your purchase receipt for warranty claims.

