

[Manuals.plus](#) /

› [Lynnoland](#) /

› Lynnoland Industrial Semi Flush Mount Ceiling Light, Brushed Nickel, Model N1900CL03 User Manual

Lynnoland N1900CL03

Lynnoland Industrial Semi Flush Mount Ceiling Light

Model: N1900CL03 - Brushed Nickel with Clear Glass Shade

User Instruction Manual

1. INTRODUCTION

Thank you for purchasing the Lynnoland Industrial Semi Flush Mount Ceiling Light, Model N1900CL03. This fixture combines a brushed nickel base with a clear glass shade, offering a versatile design suitable for various indoor settings. This manual provides essential information for safe installation, operation, and maintenance of your new lighting fixture.

2. SAFETY INFORMATION

WARNING: RISK OF ELECTRIC SHOCK. Disconnect power at the circuit breaker before installation or servicing.

- Read all instructions carefully before beginning installation.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC).
- Consult a qualified electrician if you are unfamiliar with electrical wiring.
- Use only the specified bulb type and wattage.
- Do not exceed the maximum wattage of 60W for E26 medium base bulbs.
- Ensure the fixture is securely mounted to a structural element of the ceiling.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Semi Flush Mount Ceiling Light Fixture (Brushed Nickel Base, Clear Glass Shade)
- 1 x Energy-Efficient LED Edison Bulb (8W, 2700K Warm White, 800LM)
- Mounting Hardware Kit (screws, wire nuts, mounting bracket)
- Instruction Manual



Figure 1: Lynnloland Industrial Semi Flush Mount Ceiling Light with included LED bulb.

4. SPECIFICATIONS

Feature	Specification
Brand	Lynnloland
Model Number	N1900CL03
Color/Finish	Brushed Nickel (Base), Clear Glass (Shade)
Material	Glass, Metal
Style	Industrial, Farmhouse
Installation Type	Semi Flush Mount
Product Dimensions	8.6"L x 8.6"W x 6.9"H

Canopy Diameter	4.60 inches / 117mm
Bulb Base	E26 Medium Base
Max Wattage	60W (Incandescent/CFL/Halogen), 8W (LED Included)
Voltage	120 Volts
Light Color (Included Bulb)	2700K Warm White
Brightness (Included Bulb)	800 Lumen (900lm stated in feature bullets, using 800lm from specs)
Lifespan (Included Bulb)	25,000+ Hours
Indoor/Outdoor Usage	Indoor



Figure 2: Product Dimensions and Bulb Specifications.

5. INSTALLATION INSTRUCTIONS

Professional installation is recommended. Ensure power is disconnected at the circuit breaker before proceeding.

1. **Prepare for Installation:** Turn off the electricity at the main fuse box or circuit breaker.
2. **Mounting Bracket Installation:** Attach the mounting bracket to the junction box using the provided screws. Ensure it is securely fastened.
3. **Wiring:** Connect the fixture's wires to the house wires according to standard electrical codes. Typically, connect the black wire from the fixture to the black (hot) wire from the junction box, the white wire from the fixture to the white (neutral) wire from the junction box, and the ground wire from the fixture to the ground wire from the junction box. Secure connections with wire nuts.
4. **Secure Fixture:** Carefully tuck all wires into the junction box. Align the fixture base with the mounting bracket and secure it with the provided screws.
5. **Install Bulb:** Screw the included LED Edison bulb (or a compatible E26 bulb, max 60W) into the socket.
6. **Install Glass Shade:** Carefully attach the clear glass shade to the fixture base. Ensure it is seated properly and secured.
7. **Restore Power:** Turn the electricity back on at the main fuse box or circuit breaker.



Figure 3: Included Energy-Efficient LED Edison Bulb.

6. OPERATING INSTRUCTIONS

Once installed and power is restored, operate the light fixture using your standard wall switch. The included LED bulb provides 2700K warm white light at 800 lumens, offering soft and restful illumination.

7. MAINTENANCE

- **Cleaning:** To clean the fixture, ensure power is off. Wipe the brushed nickel base with a soft, dry cloth. The clear glass shade can be cleaned with a mild glass cleaner and a soft cloth. Avoid abrasive cleaners or materials that could scratch the finish or glass.
- **Bulb Replacement:** Ensure power is off before replacing the bulb. Allow the bulb to cool completely. Unscrew the old bulb and replace it with a new E26 medium base bulb. Do not exceed 60W for incandescent bulbs.

8. TROUBLESHOOTING


Problem	Possible Cause	Solution
---------	----------------	----------

Light does not turn on	1. Power is off 2. Loose wiring connection 3. Faulty bulb	1. Check circuit breaker and wall switch 2. Verify all wire connections are secure (power off) 3. Replace bulb with a new one
Light flickers	1. Loose bulb 2. Incompatible dimmer switch 3. Loose wiring	1. Tighten bulb 2. Ensure dimmer switch is compatible with LED bulbs 3. Check wiring connections (power off)
Glass shade is unstable	Shade not properly secured	Ensure the glass shade is correctly aligned and tightened onto the fixture base.

9. WARRANTY AND SUPPORT

Lynnoland offers a **THREE YEARS Warranty** on this product. Additionally, a **THREE MONTHS money-back guarantee** is provided for your satisfaction. For any questions, concerns, or warranty claims, please contact Lynnoland customer support through the retailer where the product was purchased.

10. PRODUCT APPLICATION EXAMPLES

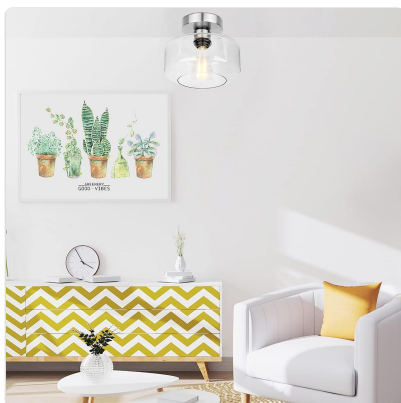

Kitchen Application



Bedroom Application



Living Room Application

© 2023 Lynnloland. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0B33WSWBF>

More documents and user manuals: <https://manuals.plus/>