Arrow YS410ACC

Arrow Yardsaver 4' x 10' Galvanized Steel Outdoor Storage Shed Instruction Manual

Model: YS410ACC

Brand: Arrow

1. INTRODUCTION

This manual provides detailed instructions for the assembly, operation, and maintenance of your Arrow Yardsaver 4' x 10' Galvanized Steel Outdoor Storage Shed. Please read all instructions carefully before beginning assembly and retain this manual for future reference.

The Arrow Yardsaver shed offers 38 square feet of storage space, designed for compact and convenient storage of lawn equipment, grills, pool accessories, bicycles, garbage cans, firewood, patio furniture, and other bulk items. Its sloped steel roof prevents water accumulation, and the lean-to design allows for efficient placement against other structures. The double-door entryway features sturdy swing doors that can be assembled on either end to suit your storage needs.

Image: The Arrow Yardsaver 4' x 10' Storage Shed, showcasing its space-saving design and interior capacity for various outdoor items.

2. IMPORTANT SAFETY INFORMATION

WARNING: This product requires assembly. Use appropriate tools and safety precautions when handling components. Always position the shed on a level surface and secure it to the ground to prevent tipping. Do not expose the shed to extreme weather conditions without proper weatherproofing. Keep sharp edges away from children and pets. Always follow the manufacturer's instructions for safe and proper usage.

- Always wear gloves and eye protection during assembly.
- Ensure the assembly area is clear of obstructions and debris.
- Do not attempt to assemble the shed alone. Two or more people are recommended.
- Secure the shed to a solid foundation to prevent wind damage.

3. SETUP AND ASSEMBLY

The Arrow Yardsaver shed is designed for straightforward assembly with pre-cut and pre-drilled parts. Follow the step-by-step instructions provided in the included manual. A level surface is crucial for proper door alignment and overall stability.

Key Features for Assembly:

- **Sloped Roof:** Designed to prevent water from pooling, ensuring durability and protection for your stored items.
- **Double-Door Entryway:** Features sturdy swing doors that can be assembled on either end for flexible access.
- **Galvanized Steel Construction:** UV-resistant panels prevent fading, cracking, or warping, offering long-lasting protection.

Image: Detail of the shed's sloped roof, engineered to shed water effectively.
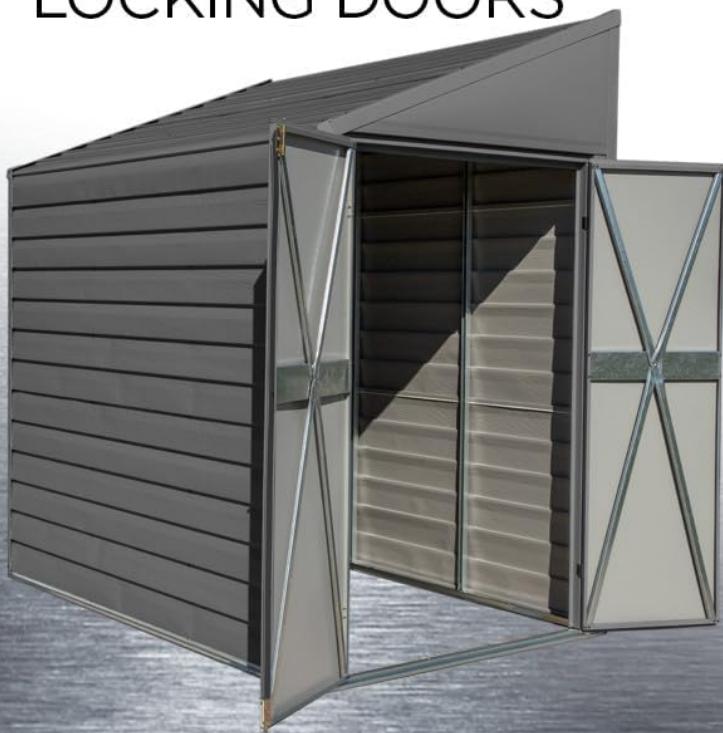
Image: The double swing doors of the shed, highlighting the customizable assembly options and secure locking mechanism.

Image: A visual representation of the rust-resistant galvanized steel, indicating all-season protection.

4. OPERATION

Your Arrow Yardsaver shed is designed for simple operation. The double swing doors provide wide access for moving items in and out. Ensure the doors are properly closed and latched to protect contents from weather and unauthorized access.

Door Operation:

- To open, unlatch the bolt on the primary door and swing it open.
- If both doors are secured, unlatch the internal bolts on the secondary door before opening.
- To close, ensure both doors align properly and engage all latches and bolts.

Image: A padlock securing the shed's door latch, demonstrating the lockable feature.

YARDSAVER
4 x 10 ft. / 1,2 x 3,1 m

APPEALING AESTHETICS
Horizontal siding in Eggshell finish to complement most home exteriors

TALLEST SHED IN CLASS
Lean-to design allows for the most overhead space for tall items

PAD-LOCKABLE DOORS
Secure belongings

GALVANIZED STEEL
Corrosion resistance

DOUBLE SWING DOORS
Can mount on either 4 ft. end for easy entry and exit.

ARROW
STORAGE PRODUCTS™

#YS410

Image: A detailed view of the internal bolt, providing additional security for the shed doors.

5. MAINTENANCE

Regular maintenance will extend the life and appearance of your storage shed.

Cleaning:

- Clean the exterior panels periodically with mild soap and water. Avoid abrasive cleaners or harsh chemicals that could damage the finish.
- Rinse thoroughly with clean water.

Inspection:

- Periodically check all screws and fasteners for tightness and re-tighten as necessary.
- Inspect the roof for any debris or blockages that could hinder water runoff.
- Ensure door hinges and latches operate smoothly. Lubricate if needed.

Image: Detailed view of the shed's horizontal siding, showing its texture and finish.

6. TROUBLESHOOTING

Water Leakage:

- Ensure all panels are correctly overlapped and secured according to the assembly instructions.
- Check for any gaps or loose screws, especially along the roofline and seams. Apply silicone sealant if necessary.
- Verify that the shed is on a level surface to prevent structural stress that could create gaps.

Difficulty Opening/Closing Doors:

- Confirm the shed is installed on a perfectly level foundation. Uneven ground can cause door misalignment.
- Check door hinges for proper installation and lubrication.
- Ensure no debris is obstructing the door's path.

7. SPECIFICATIONS

Feature	Detail
Brand	Arrow
Model Number	YS410ACC
Color	Charcoal
Material	Alloy Steel
Product Dimensions	116"D x 49"W x 82"H
Item Weight	152 Pounds
Door Style	Swing Doors
Door Width	38.5 Inches
Door Height	60.25 Inches
Assembly Required	Yes
Water Resistance Level	Water Resistant

Image: Technical drawing illustrating the key dimensions (depth, width, height) of the YS410 shed.
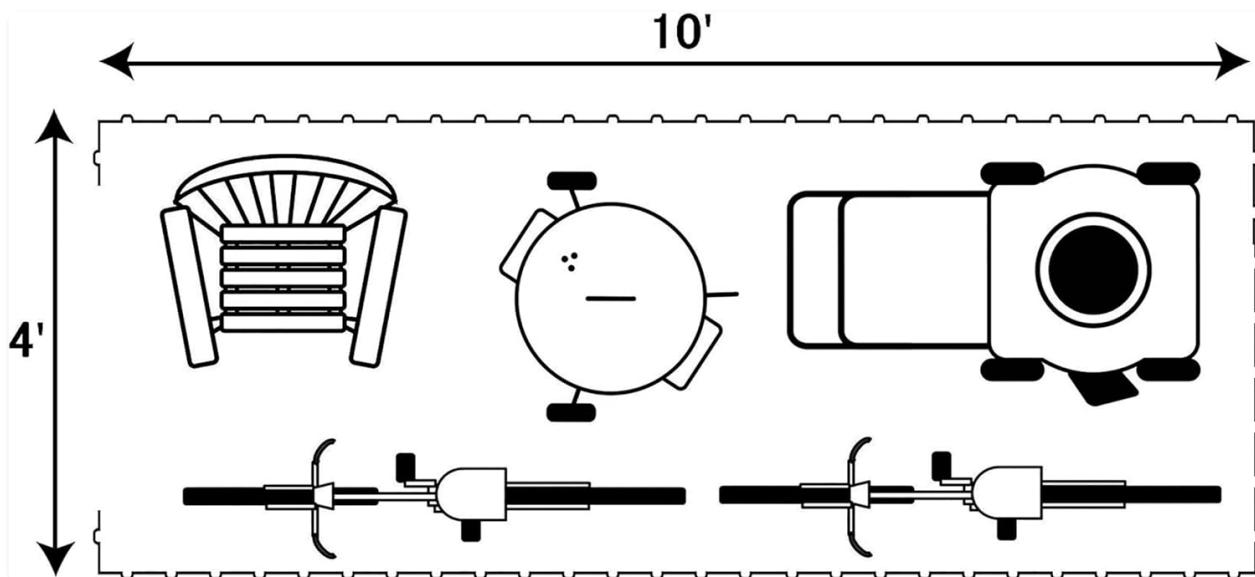

Image: An illustrative layout showing how various items like a lawnmower, bicycle, and other tools can be stored within the 4' x 10' shed.

8. Warranty Information

This product comes with a **12-Year Limited Warranty**. Please refer to the warranty card included with your purchase for full terms and conditions. Keep your proof of purchase for any warranty claims.

Image: A graphic highlighting the 12-Year Limited Warranty for the product.

9. Support

For additional support, parts, or product information, please visit the official Arrow Store or contact customer service.

Arrow Store: Visit the Arrow Store on Amazon

Manufacturer: ShelterLogic