



[Manuals.plus](#) /

> [HEONAM](#) /

> HEONAM 59 Inch Electric L-Shape Standing Desk User Manual

HEONAM 1

HEONAM 59 Inch Electric L-Shape Standing Desk User Manual

Model: 1 | Brand: HEONAM

[Introduction](#)

[Safety Information](#)

[Setup & Assembly](#)

[Operating
Instructions
Warranty &
Support](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

1. INTRODUCTION

Thank you for choosing the HEONAM 59 Inch Electric L-Shape Standing Desk. This manual provides essential information for the safe assembly, operation, and maintenance of your new desk. Designed for home office use, this desk offers a spacious work surface and smooth electric height adjustment to promote a healthier and more productive work environment.

Key features include:

- **Smooth Height Adjustment:** Effortlessly switch between sitting and standing positions with the electric lift system.
- **Spacious Work Surface:** Provides ample room for multiple monitors, laptops, and office accessories. The L-shape design offers extended workspace.
- **Sturdy & Stable Construction:** Built with a durable steel frame and high-quality engineered wood desktop for long-lasting use.
- **Smart Memory Control:** Customize and save up to four preferred height settings for quick adjustments.
- **Modern & Versatile Design:** Sleek style suitable for various home or office decors.

2. SAFETY INFORMATION

Please read and understand all safety instructions before assembly and use. Failure to follow these instructions may result in injury or damage to the product.

- Ensure proper assembly according to the instructions provided.
- Do not exceed the maximum weight recommendation of 132 pounds (60 kg).


- Utilize the anti-collision technology to prevent damage to the desk and surrounding objects during height adjustments.
- Keep children and pets away from the desk during operation.
- Do not sit or stand on the desk.
- Keep all electrical components dry and away from liquids.
- Regularly check all screws and connections to ensure they are tight.

3. SETUP & ASSEMBLY


Assembly requires approximately 45 minutes and is recommended for two people. While some tools are included, a power drill may expedite the process. Please verify all parts are present before beginning assembly.

3.1. Unpacking and Part Identification

Carefully unpack all components and lay them out on a clean, soft surface to prevent scratches. Refer to the parts list to identify each component.



CONTROLLER TOUCH SCREEN







 <div style="background-color: #1a3d54; color: white; padding: 5px; border-radius: 10px; width: fit-content; margin: 10px auto;">4 Memory Setting Buttons</div> <p>4 memory height in 1/2/3/4</p>	 <div style="background-color: #1a3d54; color: white; padding: 5px; border-radius: 10px; width: fit-content; margin: 10px auto;">Re-memory Height</div> <p>Long press to re-memory your height</p>
 <div style="background-color: #1a3d54; color: white; padding: 5px; border-radius: 10px; width: fit-content; margin: 10px auto;">Up/Down Movement</div> <p>Press the button to adjust the height</p>	 <div style="background-color: #1a3d54; color: white; padding: 5px; border-radius: 10px; width: fit-content; margin: 10px auto;">LED Display Screen</div> <p>LED screen displays current height</p>

Figure 3.1: All desk components laid out for assembly. The desktop is divided into multiple pieces for easier handling and assembly.

3.2. Assembling the Desktop

Connect the desktop sections using the provided dowels and fasteners. Ensure the sections align perfectly to form the L-shape.

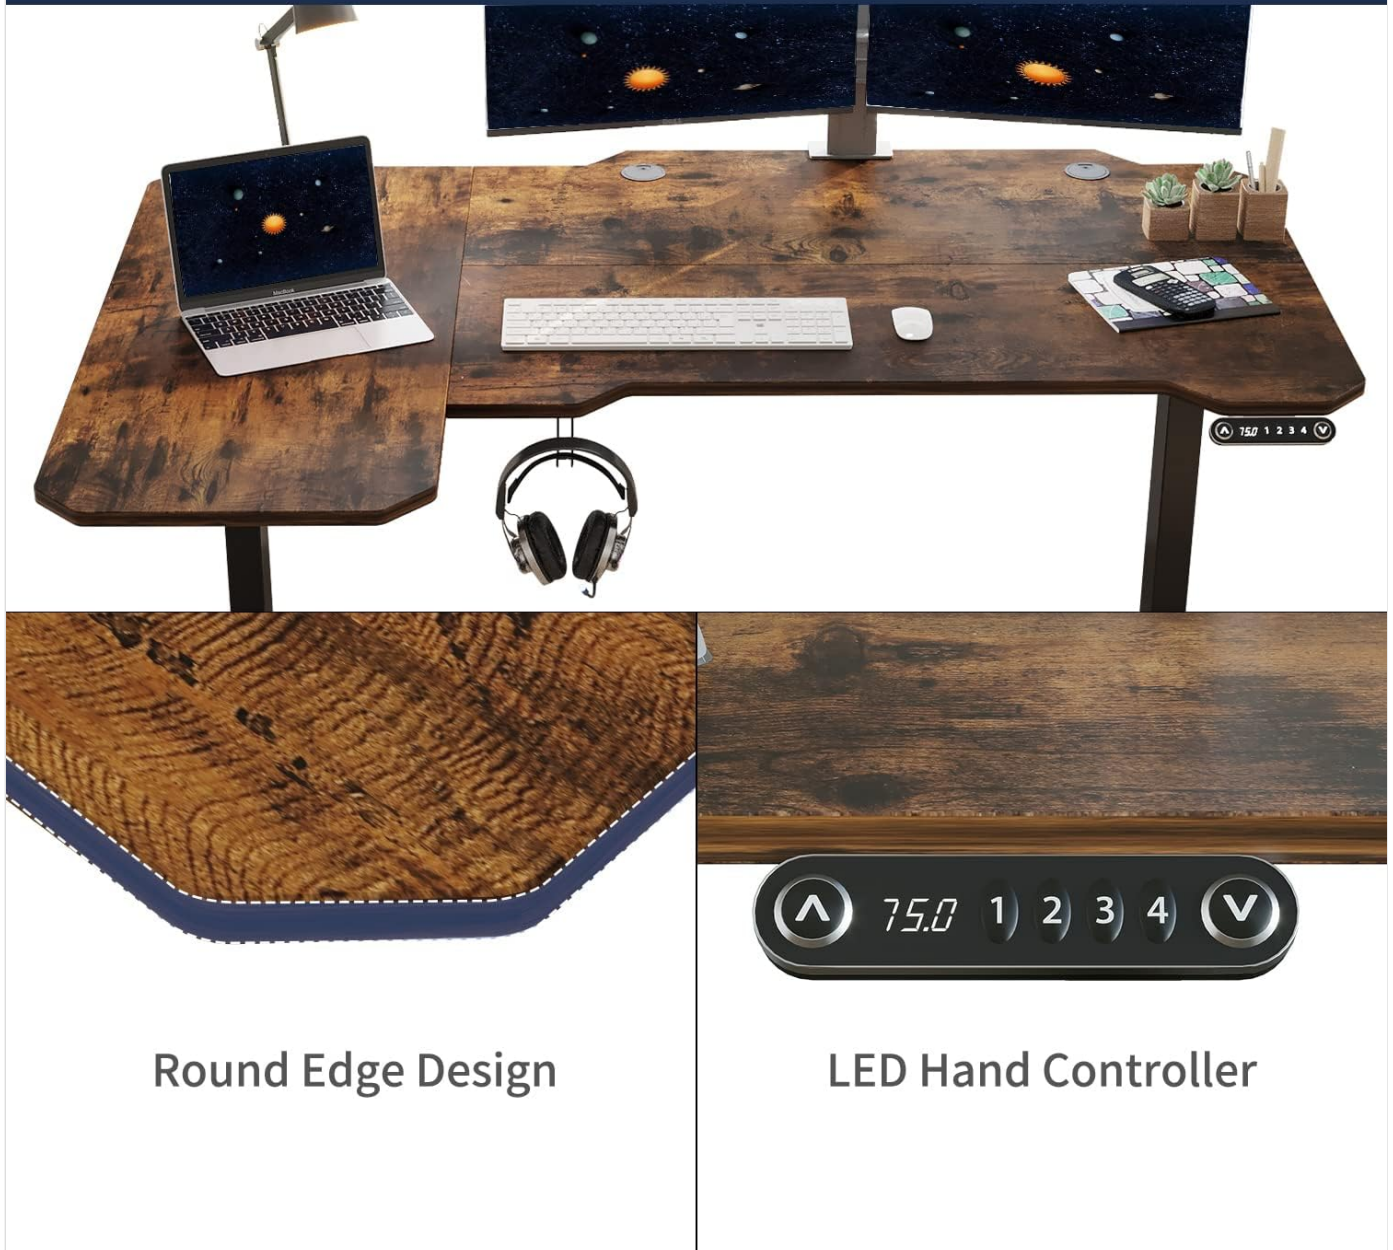


Figure 3.2: Connecting the desktop pieces. Ensure dowels are fully inserted and connections are secure.

3.3. Attaching the Legs and Frame

Attach the desk legs to the main frame. Pay close attention to the orientation of the motor and support beams. The motor should align with the designated holes on the leg brackets. Ensure all screws are tightened securely.

SPACIOUS WORK AREA



Round Edge Design

LED Hand Controller

Figure 3.3: Securing the leg and frame components. The motor is integrated into one of the legs.

For detailed visual guidance on frame assembly, including motor and sync rod installation, please refer to the official installation video:

Your browser does not support the video tag.

Video 3.1: HEONAM 59" Desk Installation Video. This video provides a step-by-step guide for assembling the desk frame and connecting the motor components, including important alignment tips for the sync rod.

3.4. Finalizing the Frame and Desktop Connection

Once the frame is assembled, carefully place the desktop onto the frame and secure it with the remaining screws. Ensure all connections are firm before proceeding.

Ergonomic Adjustable Height Desk



Figure 3.4: Attaching the desktop to the assembled frame. Double-check all screw placements for stability.

3.5. Cable Management

Utilize the integrated cable management basket and clips to organize power cords and other cables, ensuring they do not interfere with the desk's movement.



Figure 3.5: Cable management basket for organizing wires and power strips.

The desk also includes a hook for headphones or other accessories, which can be installed on either side of the desk.



Figure 3.6: Headphone hook for convenient storage.

4. OPERATING INSTRUCTIONS

Your HEONAM Electric Standing Desk is equipped with an intuitive control panel for easy height adjustment and memory settings.

4.1. Control Panel Overview

HEONAM STANDING DESK

Please check the part list before installation

Attention:

The desktop is divided into pieces.
It is sturdy and easy to install.



Figure 4.1: The LED Hand Controller for height adjustment and memory presets.

- **Up/Down Arrows (▲ / ▼):** Press and hold to manually adjust the desk height.
- **LED Display Screen:** Shows the current desk height in inches.
- **Memory Setting Buttons (1, 2, 3, 4):** Save and recall your preferred height positions.

4.2. Adjusting Height

To adjust the desk height, simply press and hold the up (▲) or down (▼) arrow buttons until the desk reaches your desired height. Release the button to stop movement.

4.3. Setting Memory Presets

The desk allows you to save up to four custom height settings:

1. Adjust the desk to your desired height using the up/down arrows.
2. Press and hold one of the memory buttons (1, 2, 3, or 4) until the LED display flashes or beeps, indicating the height has been saved.
3. To recall a saved height, simply press the corresponding memory button (1, 2, 3, or 4). The desk will automatically move to that preset height.

5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your standing desk.

- **Cleaning:** Wipe the desktop and frame with a soft, damp cloth. Avoid harsh chemicals or abrasive cleaners.
- **Inspections:** Periodically check all screws and connections to ensure they remain tight. Re-tighten if necessary.
- **Cable Management:** Ensure cables are neatly organized and do not obstruct the desk's movement.
- **Weight Limit:** Adhere strictly to the maximum weight capacity of 132 pounds to prevent damage.

6. TROUBLESHOOTING

If you encounter any issues with your desk, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Desk does not move.	Power cable disconnected, motor issue, or overload.	Check power connections. Ensure desk is not overloaded. Contact customer support if problem persists.
Uneven height adjustment.	Loose connections or obstruction.	Verify all frame connections are tight. Check for obstructions under the desk.
Memory presets not working.	Incorrect programming.	Re-program the memory presets following the instructions in Section 4.3.
Desk makes unusual noises.	Loose components or motor strain.	Check all screws and bolts. Reduce weight on the desk. If noise persists, contact support.

7. SPECIFICATIONS

The following specifications apply to the HEONAM 59 Inch Electric L-Shape Standing Desk:

DESK SIZE



Figure 7.1: Desk dimensions and height range.

Feature	Detail
Brand	HEONAM
Model Number	1
Model Name	Standing desk
Desktop Material	Engineered Wood
Frame Material	Alloy Steel
Color	Rustic Brown
Minimum Height	27 Inches
Maximum Height	45 Inches

Feature	Detail
Maximum Weight Recommendation	132 Pounds
Lifting Mechanism	Electric
Number of Height Presets	4
Recommended People for Assembly	2
UPC	768599667232

8. WARRANTY & SUPPORT

Your HEONAM Electric Standing Desk comes with a Limited 1 Year Warranty. For any questions, technical assistance, or warranty claims, please contact HEONAM customer support.

Additional protection plans may be available for purchase from your retailer.

