Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

DeLUX M800PRO 3370

DeLUX M800PRO Wireless Gaming Mouse

User Manual

1. Introduction

Thank you for choosing the DeLUX M800PRO Wireless Gaming Mouse. This manual provides detailed instructions on how to set up, operate, and maintain your new gaming mouse. Please read this manual thoroughly before use to ensure optimal performance and longevity of your device.

2. Product Overview

2.1 Package Contents

- DeLUX M800PRO Wireless Gaming Mouse
- USB-C to USB-A Charging Cable
- 2.4G USB Receiver
- Replacement PTFE Feet
- User Manual

2.2 Key Features

- **Ultra-Lightweight Design:** Weighs only 70 grams for swift gaming operations and reduced fatigue.
- **Multi-Device Connectivity:** Supports wired USB-C, 2.4G wireless, and Bluetooth 5.0, allowing connection to up to 4 devices.
- **High Precision Tracking:** Equipped with a PAW3370 optical sensor, offering 5 adjustable DPI levels (800/1600/3200/8000/19000), 400 IPS, 50g ACC, and a 1000Hz refresh rate.
- **Programmable Buttons:** Features 6 programmable buttons for personalized lighting, DPI, LOD, and macro settings with onboard memory.
- **Durable Components:** Built with Kailh GM 8.0 switches, a TTC wheel encoder, and PTFE feet for durability and smooth performance.
- **Long Battery Life:** Up to 56 hours of playtime on a single charge with a built-in rechargeable battery.

2.3 Mouse Layout



Figure 2.3.1: Top view of the DeLUX M800PRO Wireless Gaming Mouse.

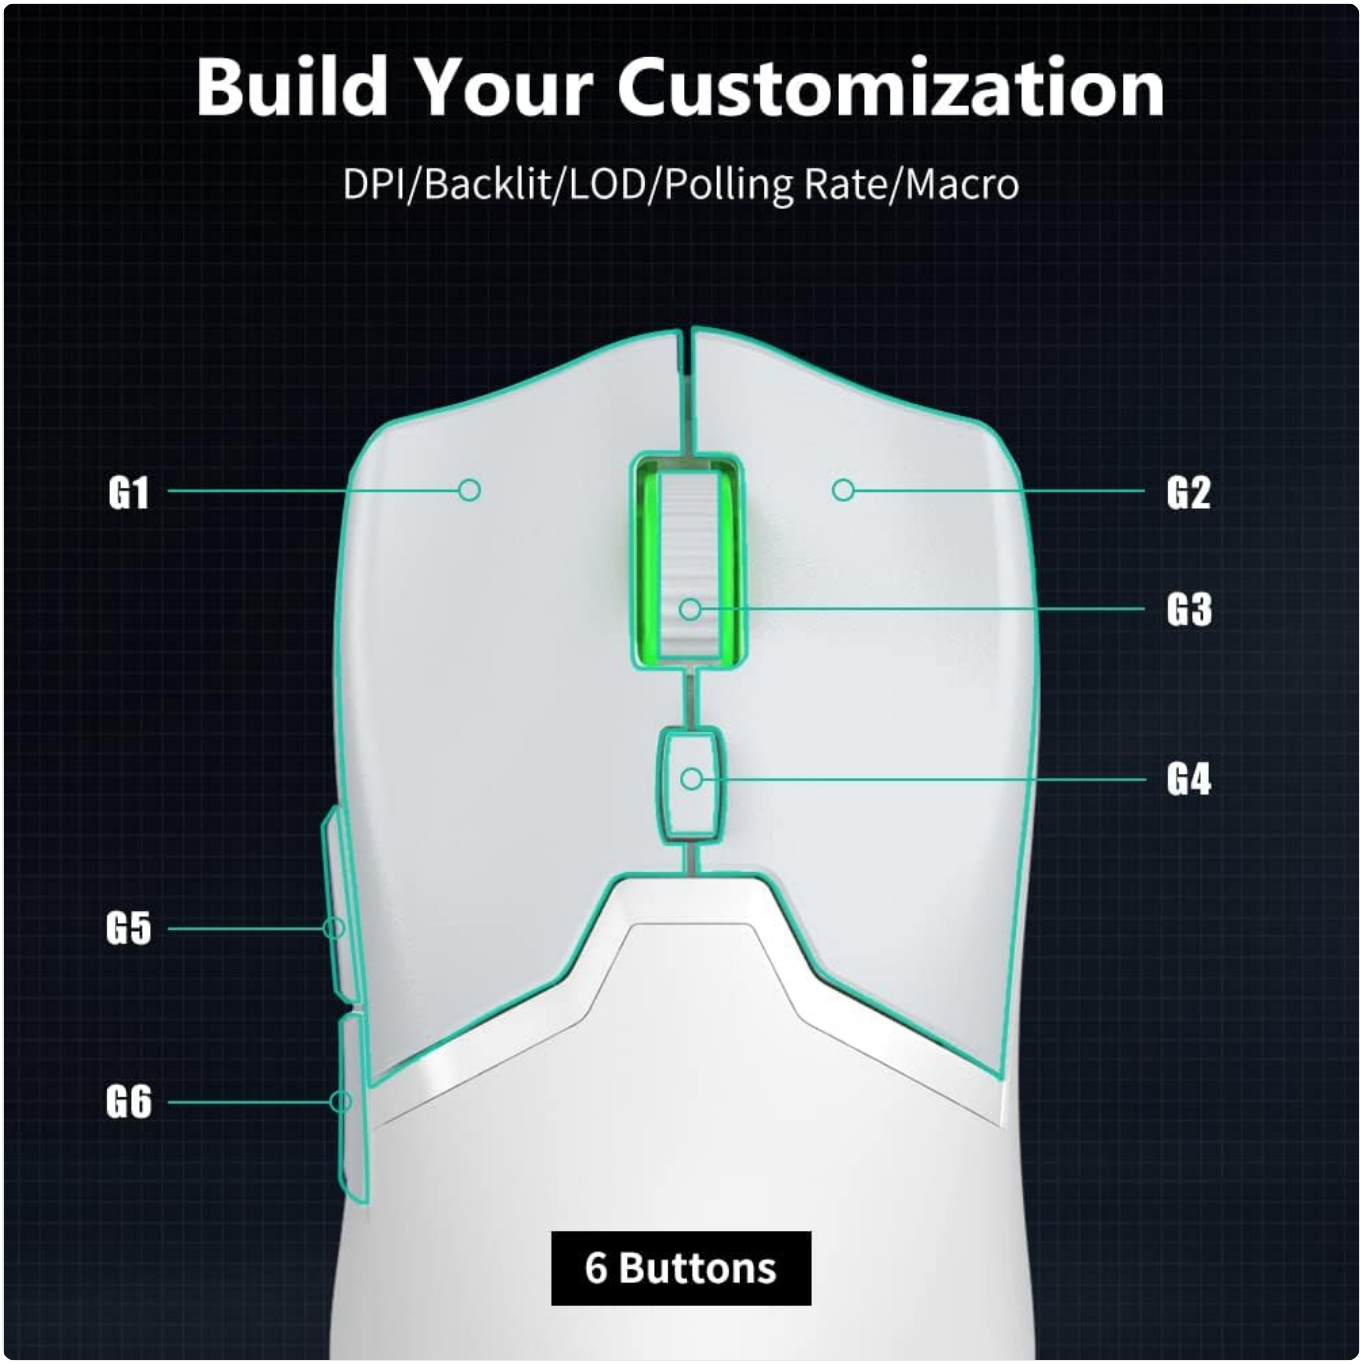

Figure 2.3.2: Illustration of the 6 programmable buttons.



Figure 2.3.3: Bottom view highlighting the PAW3370 sensor and mode switch.

3. Setup

3.1 Charging the Mouse

Before first use, it is recommended to fully charge the mouse. Connect the provided USB-C cable to the mouse's front port and the USB-A end to a computer's USB port or a compatible USB charger. The charging indicator will provide feedback on the battery status.



Figure 3.1.1: Charging the DeLUX M800PRO mouse.

3.2 Connecting the Mouse

The DeLUX M800PRO supports three connection modes: 2.4G Wireless, Bluetooth, and Wired USB-C.

3.2.1 2.4G Wireless Connection

1. Locate the 2.4G USB receiver, usually stored in a compartment on the bottom of the mouse.
2. Plug the USB receiver into an available USB port on your computer.
3. Slide the mode switch on the bottom of the mouse to the '2.4G' position.
4. The mouse should automatically connect to your computer.

3.2.2 Bluetooth Connection

1. Slide the mode switch on the bottom of the mouse to either 'BT1' or 'BT2' position.
2. Press and hold the DPI button (G4) and the forward side button (G5) simultaneously for 3 seconds until the mouse indicator light flashes rapidly, indicating pairing mode.
3. On your computer or device, go to Bluetooth settings and search for new devices.

4. Select 'DeLUX M800PRO' from the list of available devices to complete the pairing process.
5. Repeat for 'BT2' if connecting to a second Bluetooth device.

3.2.3 Wired USB-C Connection

1. Connect the provided USB-C cable to the mouse's front port.
2. Connect the USB-A end of the cable to an available USB port on your computer.
3. The mouse will function as a wired mouse and charge simultaneously.

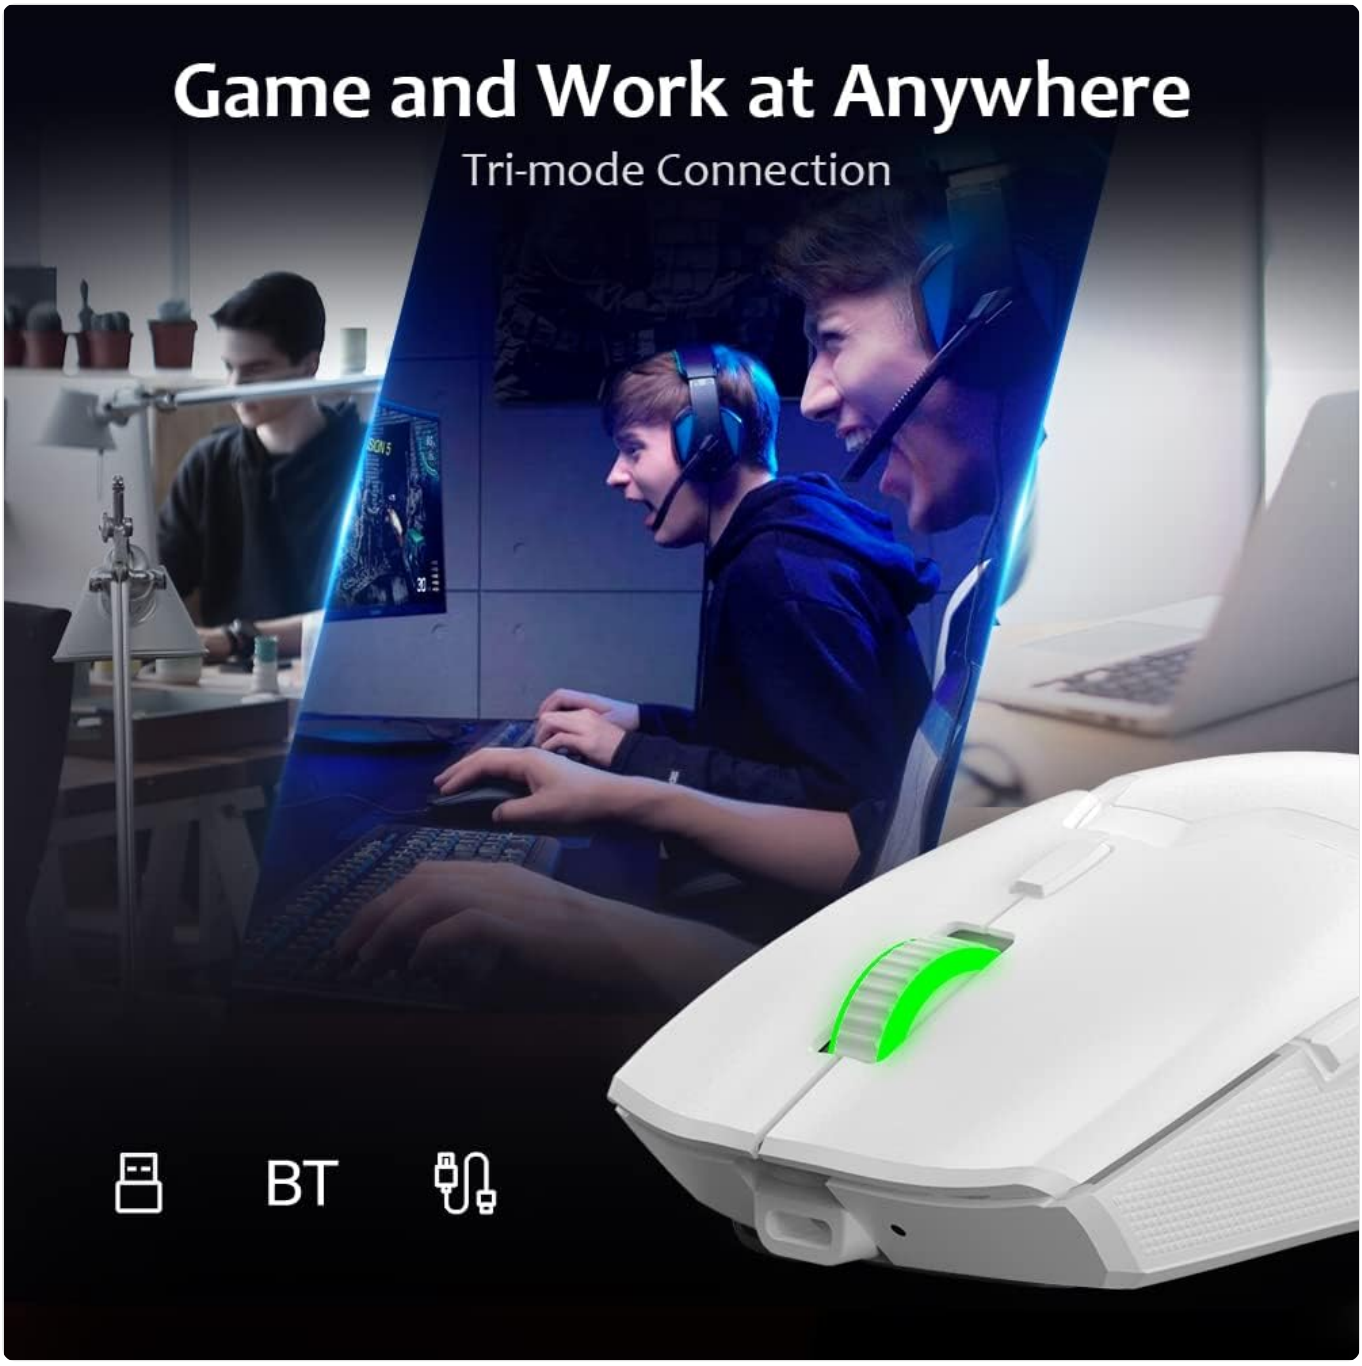

Figure 3.2.1: Tri-mode connection options.

4. Operating Instructions

4.1 DPI Adjustment

The mouse features 5 adjustable DPI levels: 800, 1600, 3200, 8000, and 19000. You can cycle through these DPI settings by pressing the dedicated DPI button (G4) located behind the scroll wheel. The LED indicator on the mouse may change color or pattern to indicate the current DPI level.

4.2 Programmable Buttons and Software

The DeLUX M800PRO mouse has 6 programmable buttons that can be customized using the official DeLUX software. The software allows you to:

- Reassign button functions (e.g., Left Click, Right Click, Middle Button, Forward, Backward, DPI Loop).
- Create and assign macros for complex command sequences.
- Adjust DPI settings and polling rate.
- Customize RGB lighting effects and colors.
- Set Lift-Off Distance (LOD).

The software can typically be downloaded from the official DeLUX website. Refer to the software's built-in help for detailed instructions on customization.

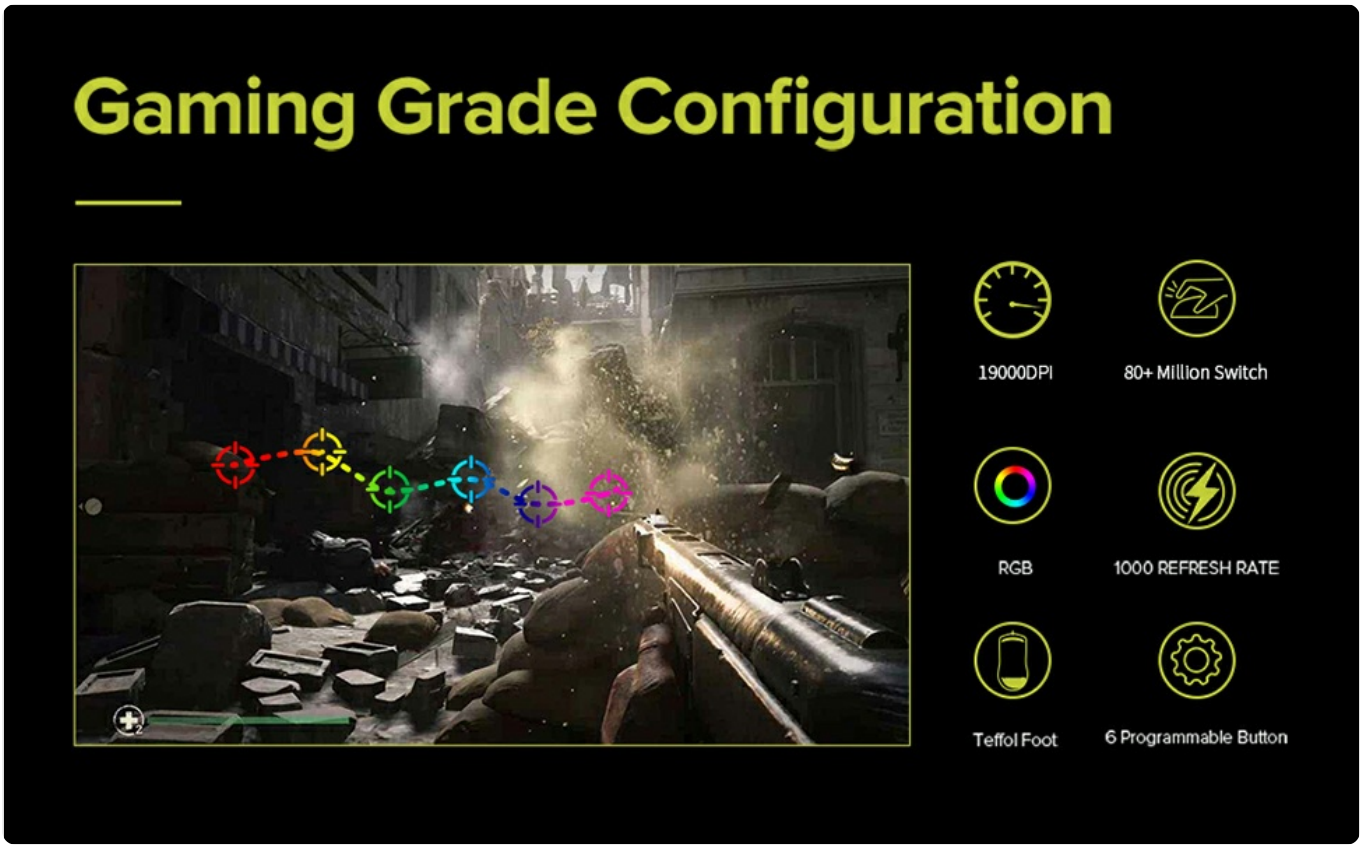

Figure 4.2.1: DeLUX customization software interface.

4.3 Battery Management

The mouse is equipped with a built-in rechargeable battery. A full charge provides up to 56 hours of usage. When the battery capacity is low, the mouse's backlight will blink to indicate that charging is required. Connect the mouse using the USB-C cable to recharge.

5. Maintenance

5.1 Cleaning

To clean your mouse, use a soft, dry cloth. For stubborn dirt, a slightly damp cloth with mild soap can be used, but ensure no liquid enters the mouse. Avoid using harsh chemicals or abrasive materials.

5.2 Storage

Store the mouse in a cool, dry place away from direct sunlight and extreme temperatures. If storing for an extended

period, ensure the mouse is fully charged to preserve battery health.

6. Troubleshooting

Problem	Possible Cause	Solution
Mouse not responding	Low battery; Incorrect connection mode; Receiver not plugged in (2.4G); Bluetooth not paired.	Charge the mouse; Ensure mode switch is correct (2.4G/BT1/BT2); Plug in receiver; Re-pair Bluetooth.
Jittery or inconsistent tracking	Interference; Dirty sensor; Mouse feet issues; Dongle too far (wireless).	Move wireless dongle closer to the mouse; Clean the optical sensor; Ensure protective film is removed from mouse feet; Consider replacing PTFE feet if worn.
Buttons feel mushy or inconsistent	Manufacturing variation; Wear and tear.	If new, contact customer support for potential replacement; Continued use may break them in.
Backlight not working or blinking	Low battery; Lighting disabled in software.	Charge the mouse; Check lighting settings in the DeLUX software.

7. Specifications

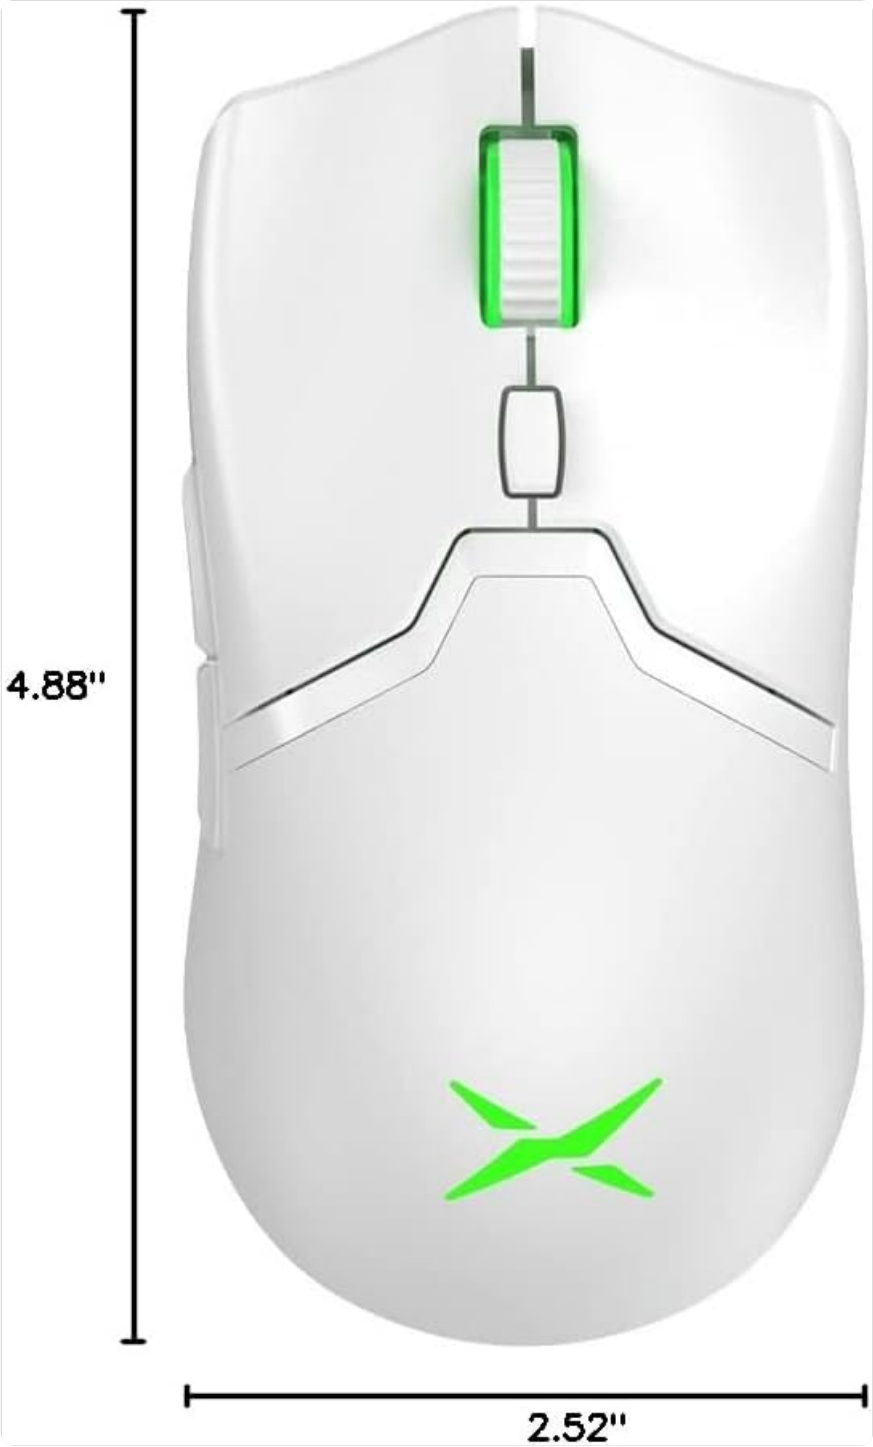

Figure 7.1.1: Mouse Dimensions.

Feature	Detail
Model Number	M800PRO 3370
Product Dimensions	4.88 x 2.52 x 1.5 inches
Item Weight	2.47 ounces (70 grams)
Sensor	PAW3370 Optical Sensor
DPI Settings	800/1600/3200/8000/19000
Tracking Speed (IPS)	400
Acceleration (ACC)	50g

Feature	Detail
Polling Rate	1000Hz
Switches	Kailh GM 8.0 Micro Switches
Encoder	TTC Wheel Encoder
Connectivity	2.4G Wireless, Bluetooth 5.0, Wired USB-C
Battery Type	Lithium Polymer (included)
Battery Life	Up to 56 hours
Programmable Buttons	6
Feet Material	PTFE
Color	PAW3370-19000DPI-White
Country of Origin	China

8. Official Product Video

▶ **Watch video online**
DELUX M800PRO White Wireless Gaming Mouse with PAW 3370

Video 8.1.1: Official product video showcasing the DeLUX M800PRO White Wireless Gaming Mouse with PAW 3370 sensor, highlighting its features and performance. This video demonstrates the mouse's lightweight design, tri-mode connectivity, precise trigger, RGB backlight, upgraded PTFE feet, and customization software.

9. Warranty and Support

DeLUX products are designed and manufactured to the highest standards. For warranty information and technical support, please refer to the warranty card included in your product packaging or visit the official DeLUX website. Keep your purchase receipt as proof of purchase for warranty claims.

© 2024 DeLUX. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0B749M8GQ

More documents and user manuals: **https://manuals.plus/**