

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Clovis](#) /
- › [Clovis 68-72" W x 76" H Frameless Double Sliding Shower Door User Manual](#)

Clovis 21S1001-2

Clovis 68-72" W x 76" H Frameless Double Sliding Shower Door User Manual

Model: 21S1001-2

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of your new Clovis Frameless Double Sliding Shower Door. Designed for durability and smooth functionality, this shower door features 3/8 inch (10mm) clear SGCC tempered glass and a robust 304 stainless steel roller disc system with a matte black finish. Please read this manual thoroughly before installation and use to ensure proper function and safety.



Image 1.1: The Clovis Frameless Double Sliding Shower Door installed in a bathroom setting.

2. SAFETY INFORMATION

Always adhere to the following safety guidelines during installation and use:

- Wear appropriate personal protective equipment (PPE), including safety glasses and gloves, during installation.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges or corners.
- Ensure the installation surface (walls, floor) is structurally sound and capable of supporting the weight of the shower door.
- Do not overtighten screws, as this can damage components or glass.
- Keep children and pets away from the installation area.
- After installation, verify all components are securely fastened and the door operates smoothly.
- Do not hang on the shower door or apply excessive force.

3. SETUP AND INSTALLATION

Before beginning installation, carefully unpack all components and verify against the parts list (not provided in this manual, refer to packaging). Ensure you have all necessary tools.

3.1 Pre-Installation Checks

- **Measure Dimensions:** Confirm your shower opening width is between 68-72 inches and height is 76 inches.
- **Wall Preparation:** Ensure walls are plumb, level, and reinforced where necessary to support the shower door.
- **Tools Required:** Measuring tape, level, drill, screwdriver set, silicone sealant, pencil, utility knife.



Image 3.1: Detailed diagram illustrating the adjustable width (68-72" W) and height (76" H) of the shower door, along with glass thickness (0.4" or 10mm) and handle placement.

3.2 Installation Steps (General Overview)

1. **Install Top Track:** Secure the anodized aluminum top track to the wall, ensuring it is level.
2. **Install Bottom Guide:** Position and secure the bottom guide rail.
3. **Mount Rollers:** Attach the roller disc system to the top edge of the glass panels.
4. **Hang Glass Panels:** Carefully lift and hang the glass panels onto the top track rollers. The double sliding bypass

design allows for entry from either the left or right side.

5. **Adjust and Secure:** Adjust the rollers for smooth operation and ensure the panels are properly aligned. Secure the bottom guides.
6. **Install Handles:** Attach the matte black handles to the glass panels.
7. **Apply Sealing Strips:** Install the provided sealing strips along the edges of the glass panels to prevent water leakage.
8. **Test Operation:** Gently slide both doors to ensure smooth and quiet movement. Verify the soft-closing buffer system functions correctly.



Image 3.2: A detailed view of the double track sliding door mechanism, highlighting the rollers and track design for smooth movement.



Widened And Thickened Square Top
Material: Matte Black
RailSmoother And Noiseless Sliding

Image 3.3: Close-up of the widened and thickened square top rail, designed for smooth and noiseless sliding.

4. OPERATING INSTRUCTIONS

Your Clovis shower door is designed for ease of use and durability.

- **Sliding Operation:** Gently push or pull the handles to slide the glass panels. The double sliding bypass design allows either panel to move, providing flexible entry and exit.
- **Soft Closing:** The integrated damping buffer system ensures the doors close gently and quietly, minimizing impact and enhancing safety.
- **Reversible Installation:** The door can be installed to open from the left or right, and the double-sided roller design maintains a consistent appearance regardless of installation direction.



Image 4.1: Illustration of the bypass double sliding design, showing how both glass panels can slide independently.

Your browser does not support the video tag.


Video 4.1: Official product video demonstrating the features and operation of the Clovis Shower Door, including its double sliding mechanism.

5. MAINTENANCE AND CARE

Regular cleaning and maintenance will ensure the longevity and appearance of your shower door.

- **Glass Cleaning:** Use a soft cloth or sponge with a mild, non-abrasive glass cleaner. Avoid harsh chemicals, abrasive pads, or scouring powders that can scratch the glass or damage the nano self-cleaning coating.
- **Frame and Hardware:** Wipe down stainless steel and matte black components with a soft, damp cloth. Dry thoroughly to prevent water spots. Do not use abrasive cleaners or solvents.
- **Sealing Strips:** Periodically check sealing strips for wear or damage. Replace if necessary to maintain water tightness.

- **Roller System:** Keep the top track and rollers free of debris and soap scum to ensure smooth sliding. A silicone-based lubricant can be applied sparingly if needed, but avoid oil-based products.

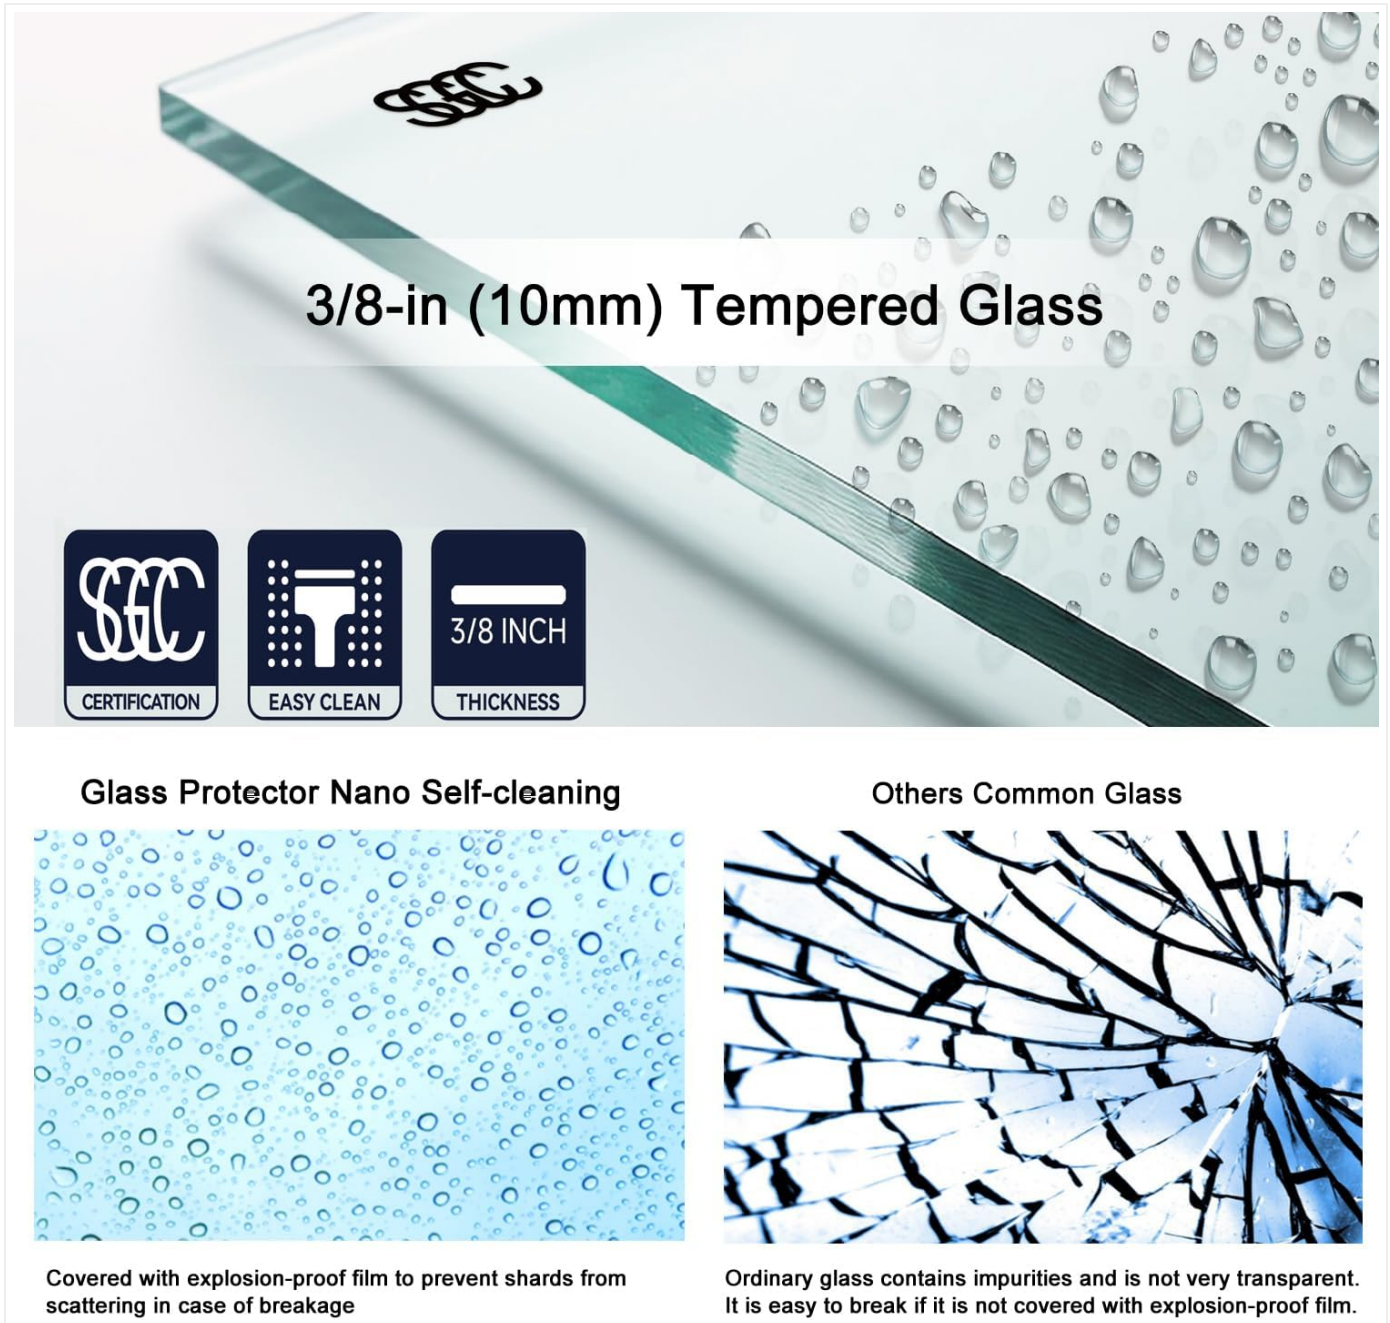

Glass Protector Nano Self-cleaning



Covered with explosion-proof film to prevent shards from scattering in case of breakage

Others Common Glass



Ordinary glass contains impurities and is not very transparent. It is easy to break if it is not covered with explosion-proof film.

Image 5.1: Close-up of the 3/8-inch (10mm) SGCC certified tempered glass, highlighting its easy-clean and durable properties.

6. TROUBLESHOOTING

Refer to this section for common issues and their solutions.

Problem	Possible Cause	Solution
Doors do not slide smoothly.	Debris in track, misaligned rollers, worn rollers.	Clean the top track and bottom guide. Check roller alignment and adjust if necessary. Contact support if rollers are worn.
Water leakage from door edges.	Damaged or improperly installed sealing strips, gaps in silicone sealant.	Inspect and re-install sealing strips. Reapply silicone sealant where necessary.

Problem	Possible Cause	Solution
Door does not close completely.	Obstruction in track, misaligned panels, buffer system issue.	Remove any obstructions. Check panel alignment and adjust. Contact support if buffer system is faulty.
Scratches on glass.	Use of abrasive cleaners or tools.	Unfortunately, scratches on tempered glass are difficult to remove. Always use soft cloths and non-abrasive cleaners.

7. SPECIFICATIONS

Feature	Detail
Brand	Clovis
Model Number	21S1001-2
Dimensions (W x H)	68-72 inches x 76 inches
Glass Thickness	3/8 inch (10mm)
Glass Type	SGCC Certified Clear Tempered Glass
Frame Material	304 Stainless Steel, Anodized Aluminum
Finish	Matte Black
Door Type	Frameless Double Sliding Bypass
Special Features	Roller Disc System, Soft Closing Buffer, Sealing Strips, Nano Self-cleaning Coating
Assembly Required	Yes
Item Weight	146 Pounds

8. WARRANTY AND SUPPORT

Clovis is committed to providing high-quality products and customer satisfaction. This product is backed by a manufacturer's warranty against defects in materials and workmanship. For specific warranty details, please refer to the warranty card included with your product or contact customer support.

If you encounter any issues, require assistance with installation, or have questions regarding your shower door, please do not hesitate to contact our customer service team. We are dedicated to resolving any concerns promptly.

- **Customer Support:** For assistance, please visit the Clovis website or contact the retailer where the product was purchased.
- **Damage or Defects:** In case of any damage or defect upon arrival or during the warranty period, please contact customer service immediately with your purchase details.



