



Manuals.plus /

› DINGLILIGHTING /

› DINGLILIGHTING DLLT 18" Caged Bladeless Ceiling Fan with Lights Instruction Manual

DINGLILIGHTING DLLT

DINGLILIGHTING DLLT 18" Caged Bladeless Ceiling Fan with Lights Instruction Manual

Brand: DINGLILIGHTING | Model: DLLT

1. INTRODUCTION

This manual provides detailed instructions for the safe and efficient installation, operation, and maintenance of your DINGLILIGHTING DLLT 18" Caged Bladeless Ceiling Fan with Lights. Please read all instructions carefully before beginning installation and retain this manual for future reference.

2. SAFETY INFORMATION

- Always turn off power at the circuit breaker before beginning installation or maintenance.
- All wiring must be in accordance with national and local electrical codes. If you are unfamiliar with wiring, consult a qualified electrician.
- Ensure the mounting structure can support the weight of the fan.
- Do not bend the fan blades when installing or cleaning.
- Use only E12 bulbs, maximum 40W each.
- This product is designed for Indoor and Outdoor use, but is not water resistant. Avoid direct exposure to water.

3. PACKAGE CONTENTS

Verify that all components listed below are included in your package:

- Fan Motor Assembly
- Fan Blades (8x ABS)
- Lamp Arms with E12 Sockets (5x)
- Mesh Cage (Upper and Lower sections)
- Downrods (4-inch and 8-inch options)

- Mounting Bracket
- Canopy
- Remote Control (requires 2*23A batteries, NOT included)
- LED Antique Edison Bulbs (5x ST58 type)
- Control Receiver
- Hardware Pack (screws, wire nuts, wrench)
- Installation Manual

4. SETUP AND INSTALLATION


Follow these steps for proper assembly and installation:

1. **Prepare the Mounting Bracket:** Disassemble the hanger bracket from the canopy. Attach the mounting bracket to your ceiling junction box using the provided screws and washers. Ensure it is securely fastened.
2. **Assemble Lamp Arms:** Insert the wires from each of the five lamp arms through the designated holes in the fan motor assembly. Secure each lamp arm with a washer and nut.
3. **Wire the Lamp Arms:** Connect all black wires from the lamp arms to the blue wire from the control receiver using a wire nut. Connect all white wires from the lamp arms to the white wire from the control receiver using a wire nut. Secure connections with electrical tape.
4. **Attach Fan Blades:** Place the fan blade assembly onto the motor shaft. Secure it by screwing on the cap.
5. **Assemble Mesh Cage:** Connect the smaller mesh cage sections together using the provided finger-tightening bolts and nuts. Ensure the tabs are facing upwards.
6. **Attach Fan Assembly to Mesh Cage:** Carefully align the holes on the fan motor assembly with the corresponding holes on the assembled mesh cage. Use the provided long bolts and nuts to secure the fan assembly to the mesh cage.
7. **Prepare Downrod:** If using the shorter 4-inch downrod, remove the pre-installed ball from the 8-inch downrod and attach it to the 4-inch downrod. Feed the ground wire through the downrod.
8. **Attach Downrod to Fan:** Feed the wires from the fan assembly through the chosen downrod. Loosen the set screws on the downrod receiver on the fan motor. Slide the downrod into the receiver, aligning the pin with the hole. Insert the cotter pin and tighten the set screws.
9. **Mount Fan to Ceiling:** Lift the assembled fan and hook the downrod ball into the ceiling mounting bracket. Connect the ceiling wires (live, neutral, ground) to the corresponding wires from the fan and control receiver using wire nuts.
10. **Install Light Bulbs:** Screw the provided E12 LED Antique Edison bulbs into the lamp sockets.
11. **Final Assembly:** Slide the canopy up to cover the wiring and mounting bracket, securing it with the provided screws.

Your browser does not support the video tag. This video demonstrates the unboxing and assembly process of the DINGLILIGHTING DLLT Ceiling Fan. It shows how to connect the lamp arms, fan blades, and mesh cage, as well as preparing the downrod and mounting the fan.

Your browser does not support the video tag. This video provides a step-by-step guide on how to assemble the DINGLILIGHTING DLLT Fandelier, including connecting the various components and preparing it for installation.

INFORMATION

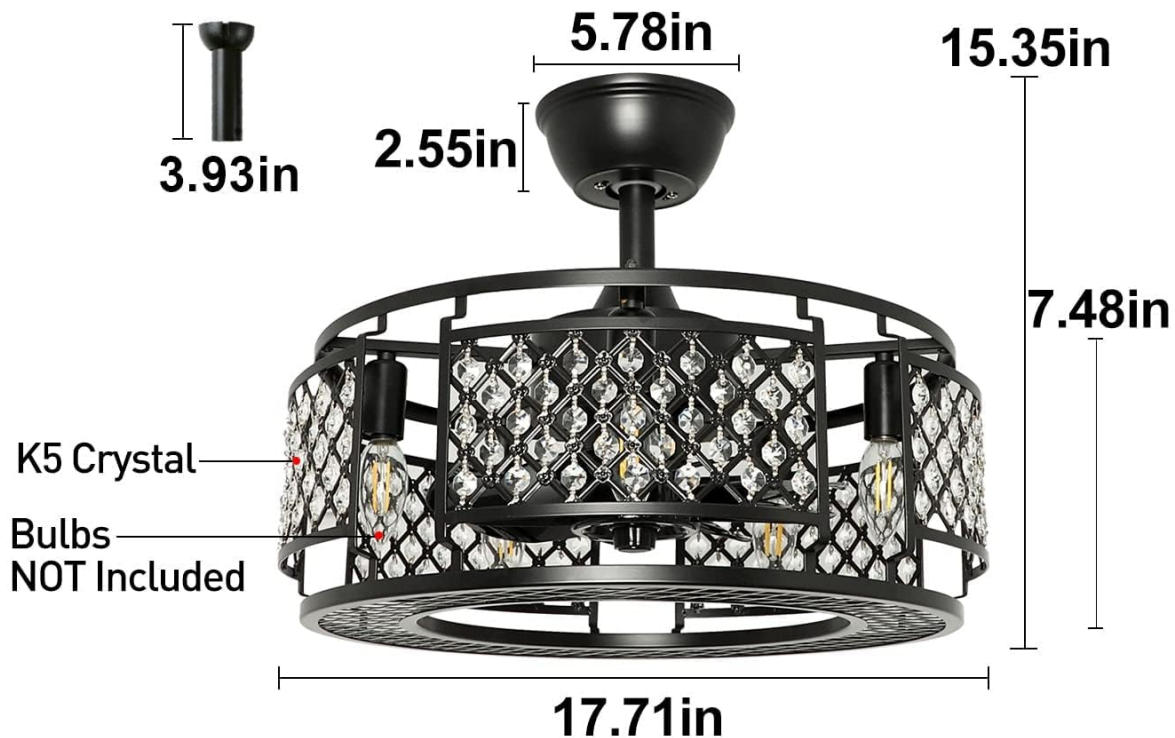

【Material】 Iron + ABS +Crystal

【Light Socket】 E12*5 (Each Max 40W)

【Motor】 AC Silent Motor

【Fan】 8*ABS Fan Blades

【Voltage】 110-120V

【Funtion】 3 Speeds + Timing


Image: Detailed dimensions and key components of the DLLT Caged Ceiling Fan, including material, light socket type, motor, fan blades, voltage, and functions.






5. OPERATING INSTRUCTIONS

Your DINGLILIGHTING DLLT Ceiling Fan is operated using the included remote control:

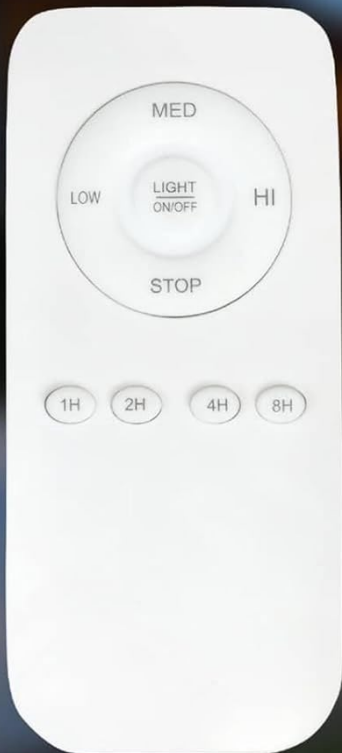- **Light ON/OFF:** Press the 'LIGHT ON/OFF' button to toggle the lights.
- **Fan Speed:** Select from 6 adjustable speeds (1-6) using the numbered buttons.
- **Fan ON/OFF:** Press the 'FAN/OFF' button to turn the fan on or off.
- **Timer Function:** Set the fan to automatically turn off after 1, 2, 4, or 8 hours using the '1H', '2H', '4H', '8H' buttons.
- **Forward/Reverse:** Use the 'F/R' button to change the direction of the fan blades. Forward mode (downward airflow) is ideal for cooling in summer. Reverse mode (upward airflow) helps circulate warm air in winter.
- **All OFF:** Press the 'ALL OFF' button to turn off both the fan and the lights simultaneously.

Remote Battery **NOT** Included
Require **2*23A Batteries**



| | |
|--|------------------|
|  | Light ON/OFF |
|  | Low Speed |
|  | Medium Speed |
|  | High Speed |
| STOP | Fan off |
|  | Timing: 1/2/4/8H |



Speeds Setings



Timing Funtion

Image: Overview of the remote control buttons and their corresponding functions, including light control, fan speed settings, timer options, and fan direction.



Image: Visual representation of the three primary fan speed settings (Low, Medium, High) and their suggested uses for different comfort levels.

Timer & Silent Pure Copper Motor



Image: Illustration of the 4 fan timing options (1/2/4/8H) for automated sleep shutdown and the silent pure copper motor for quiet operation.

6. MAINTENANCE

- **Cleaning:** To clean the fan, wipe with a soft, damp cloth. Do not use abrasive cleaners or harsh chemicals.
- **Bulb Replacement:** Ensure power is off before replacing bulbs. Use only E12 base bulbs, maximum 40W.
- **Tightness:** Periodically check all screws and connections to ensure they are secure.

7. TROUBLESHOOTING

- **Fan does not operate:** Check power supply, circuit breaker, and ensure all wiring connections are secure. Verify remote control batteries are functional.
- **Lights do not work:** Check bulbs, wiring connections, and power supply.
- **Excessive wobbling:** Ensure all mounting screws are tight and the downrod is properly seated.

- **Remote control not responding:** Replace remote batteries. Ensure the receiver is properly installed and not obstructed.

8. SPECIFICATIONS

| Feature | Specification |
|---------------------------|---|
| Brand | DINGLILIGHTING |
| Model Number | DLLT |
| Color | Black |
| Material | Metal |
| Style | Cage |
| Light Fixture Form | Ceiling Fan Light |
| Room Type | Farmhouse, Living Room, Dining Room, Bedroom, Kitchen, Porch, Patio, Garage, Garden, Yard |
| Indoor/Outdoor Usage | Indoor, Outdoor |
| Power Source | AC |
| Control Method | Remote |
| Light Source | LED |
| Number of Light Sources | 5 |
| Voltage | 110 Volts (AC) |
| Light Color | Warm White |
| Embellishment Feature | Crystal |
| Wattage (per bulb) | Max 40 watts |
| Bulb Base | E12 |
| Brightness | 2250 Lumen |
| Mounting Type | Downrod Mount |
| Item Dimensions L x W x H | 17.7"L x 17.7"W x 15.34"H |
| Special Features | 1/2/4/8H Timer, 6 Adjustable Speeds, Remote Control, Reversible DC Motor |

9. WARRANTY AND SUPPORT

DINGLILIGHTING provides a 366-day service warranty for this product. If you encounter any problems during use, please feel free to contact our professional after-sales team for assistance.

