

Phelinta XF-C01

Phelinta 3-in-1 Wireless Charging Station User Manual

Model: XF-C01

INTRODUCTION

This manual provides comprehensive instructions for the safe and efficient use of your Phelinta 3-in-1 Wireless Charging Station. Please read this manual thoroughly before operation and retain it for future reference.

PACKAGE CONTENTS

- 1 x Phelinta 3-in-1 Wireless Charger Station
- 1 x QC 3.0 Power Adapter
- 1 x USB-C to USB-C Charging Cable (1.5m/4.92ft)
- 1 x User Manual

PRODUCT SPECIFICATIONS

Feature	Detail
Model Number	XF-C01
Dimensions	5.39 x 5 x 3.7 inches
Item Weight	12 ounces
Input Voltage	120 Volts
Amperage	0.05 Amps
Connector Type	USB, USB Type C
Special Features	Charging Indicator, Wireless Charging, Digital Clock
Included Batteries	1 D battery (for clock, included)

SETUP INSTRUCTIONS

1. **Unpack Components:** Carefully remove the charging station, QC 3.0 adapter, and USB-C cable from the packaging.
2. **Connect Power:** Insert one end of the provided USB-C cable into the USB-C port on the back of the charging station. Connect the other end of the USB-C cable to the QC 3.0 power adapter.
3. **Plug into Outlet:** Plug the QC 3.0 power adapter into a standard wall outlet. The digital clock display on the charging station should illuminate, indicating it is powered on.



Image: The charging station connected to its power source, illustrating the setup process.

OPERATING INSTRUCTIONS

1. Charging Devices

The Phelinta 3-in-1 Wireless Charging Station allows simultaneous wireless charging for compatible smartphones, smartwatches, and earbuds.

- **Smartphone Charging:** Place your compatible smartphone vertically or horizontally on the upright charging pad. Ensure the phone is centered for optimal charging. The LED indicator for the phone will illuminate.
- **Smartwatch Charging:** Place your compatible Samsung Galaxy Watch on the dedicated watch charging stand. Ensure it is properly aligned and begins charging. The LED indicator for the watch will illuminate.
- **Earbud Charging:** Place your compatible wireless charging earbud case on the flat charging pad at the base. Ensure it is centered. The LED indicator for the earbuds will illuminate.



Image: A white Phelinta 3-in-1 Wireless Charging Station actively charging a smartphone, a Samsung Galaxy Watch, and a pair of earbuds.

Note on Cases: The charging station supports charging with phone cases up to 0.2 inches (5mm) thick. Remove cases with magnetic pads, metal, credit cards, or metal rings as these can interfere with wireless charging.



Image: Visual guide indicating that phone cases up to 0.2 inches are compatible, while cases with Popsockets, metal, magnets, or credit cards are not.

2. Digital Clock Features

The charging station includes a digital clock with adjustable brightness and time format.

- **Setting Time:**

- a. Press the **Time Setting Button** (circular button) quickly to toggle between 12-hour and 24-hour formats.
 - b. Press and hold the **Time Setting Button** for 3 seconds to enter time setting mode.
 - c. Use the "+" and "-" buttons to adjust the hours. Press the **Time Setting Button** again to switch to minutes, then adjust with "+" and "-".
 - d. After setting, wait 5 seconds for the device to automatically exit setting mode.
- **Adjusting Brightness:** Press the **Brightness Touch Button** (sun icon) to cycle through four brightness levels: 100%, 50%, 20%, and OFF.

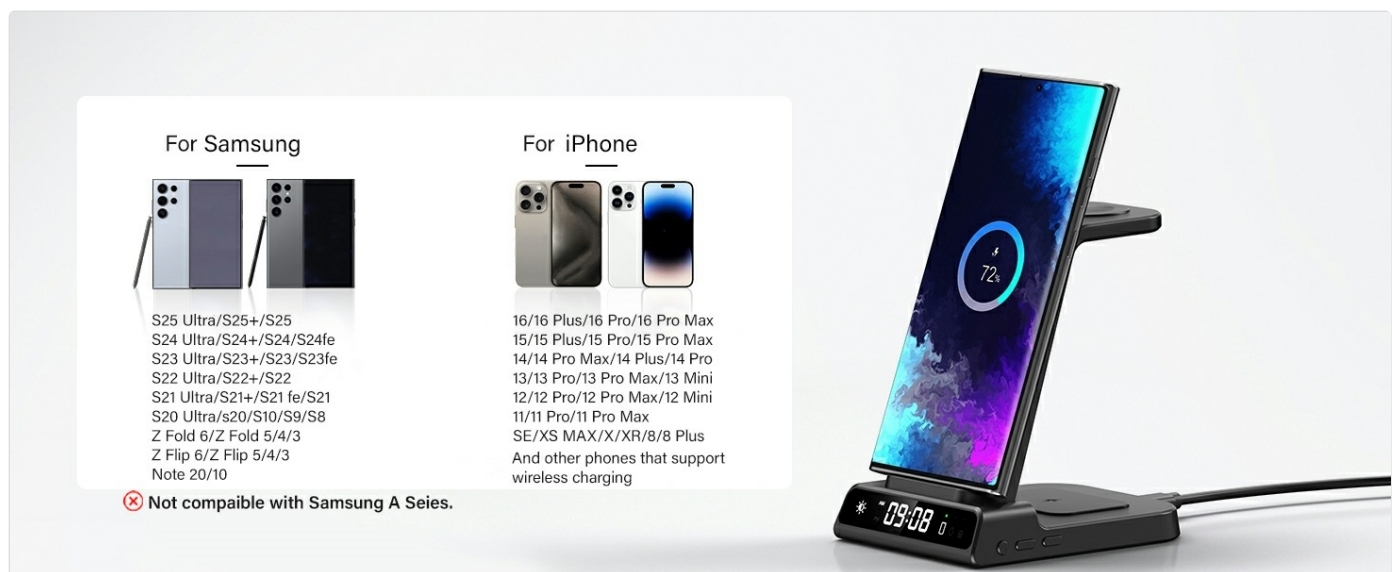


Image: Detailed instructions on how to set the time and adjust the brightness of the digital clock display.

3. Compatibility

This charging station is designed for a wide range of devices. Please verify your device's compatibility:

- **Phones:** Compatible with Samsung Galaxy S25 Ultra/S25+/S25, S24 Ultra/S24+/S24, S23 Ultra/S23+/S23, S22/S22+/S22 Ultra, S21 FE, Z Fold 6/Z Flip 6, Z Fold 5/Z Flip 5, Z Fold 4/Z Flip 4, Z Fold 3/Z Flip 3, S21/S21 Ultra, S20/S20 Ultra, S10, Note 10/Note 9, and other Samsung phones supporting wireless charging. Also compatible with iPhone 16/16 Pro/16 Plus/16 Pro Max, iPhone 15/15 Pro Max/15 Plus/15 Pro, iPhone 14/14 Pro Max/14 Plus/14 Pro, iPhone 13/13 Pro/13 Pro Max/13 Mini, 12/12 Pro/12 Pro Max/12 Mini, 11/11 Pro/11 Pro Max, SE/XS MAX/X/XR/8/8 Plus, and Google Pixel 9/9 Pro/9 Pro XL/8/8 Pro/7/7 Pro/6/6 Pro, and other Qi-enabled phones. *Not compatible with Samsung A Series.*
- **Smartwatches:** ONLY compatible with Samsung Galaxy Watch Ultra, Galaxy Watch 8/8 Classic, Galaxy Watch 7, Galaxy Watch 6/6 Classic, Galaxy Watch 5/5 Pro, Galaxy Watch 4/4 Classic, Galaxy Watch 3, Galaxy Watch Active/Active 2. *Not for Apple Watch or other non-Samsung smartwatches.*
- **Earbuds:** Compatible with Samsung Galaxy Buds 2 Pro/2, Galaxy Buds Pro, Galaxy Buds FE, Galaxy Buds+/Buds Live, AirPods 3rd generation 2021, AirPods 2/1, AirPods Pro, and other earbuds supporting wireless charging cases.



Image: A detailed chart outlining compatible phone, smartwatch, and earbud models.

4. Safety Features

The Phelinta charging station incorporates multiple safety protections to ensure safe and efficient charging:

- Over-voltage protection
- Over-current protection
- Overload protection
- Foreign object detection (FOD)
- Heat dissipation vents to prevent overheating



PERFECT GIFT FOR FAMILY & FRIENDS

Image: An exploded view diagram highlighting the internal safety features and heat dissipation design of the charging station.

MAINTENANCE

- **Cleaning:** Disconnect the power before cleaning. Use a soft, dry cloth to wipe the surface of the charging station. Do not use abrasive cleaners, solvents, or immerse the device in water.
- **Storage:** When not in use for extended periods, store the charging station in a cool, dry place away from direct sunlight and extreme temperatures.
- **Cable Care:** Avoid bending or crimping the charging cable excessively. Ensure the cable is not placed under heavy objects or in high-traffic areas to prevent damage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Device not charging	◦ Improper device placement ◦ Non-compatible device or case ◦ Power connection issue ◦ Foreign object detected	◦ Re-position device to ensure proper alignment with charging coils. ◦ Verify device and case compatibility (case thickness < 5mm, no metal/magnets). ◦ Ensure the power adapter is securely plugged into the wall and the charging station. Use the provided QC 3.0 adapter. ◦ Remove any foreign objects (coins, keys, etc.) from the charging surface.
Slow charging	◦ Using a non-QC 3.0 adapter ◦ Device misalignment ◦ Background apps consuming power	◦ Use the included QC 3.0 adapter for optimal charging speed. ◦ Adjust device placement for better coil alignment. ◦ Close unnecessary background applications on your device.
Digital clock not displaying or incorrect time	◦ Power interruption ◦ Time not set	◦ Ensure continuous power supply. The internal battery should retain time during brief power outages. ◦ Refer to "Digital Clock Features" in the Operating Instructions to set the time.
Overheating during charging	◦ Poor ventilation ◦ Foreign object interference ◦ Faulty device/charger	◦ Ensure the charging station's vents are not blocked. ◦ Remove any foreign objects. ◦ If overheating persists, discontinue use and contact customer support.

WARRANTY AND SUPPORT

Your Phelinta 3-in-1 Wireless Charging Station comes with a **1-year warranty** from the date of purchase.

For any product inquiries, technical assistance, or warranty claims, please contact Phelinta customer service. Our team aims to respond within 24 hours.

Seller: Phelinta Direct

For further assistance, please visit the [Phelinta Store on Amazon](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question