

[Manuals.plus](#) /

> [WIN STELLAR](#) /

> WINSTELLAR 36x80 3-Lite Clear Glass Door Slab Instruction Manual

## WIN STELLAR 36x80 3-Lite Clear Glass Door Slab

# WINSTELLAR 36x80 3-Lite Clear Glass Door Slab

## INSTRUCTION MANUAL

### 1. Overview

This manual provides essential information for the installation, operation, and maintenance of your WINSTELLAR 36x80 3-Lite Prebuilt Interior Clear Glass Door Slab. This product is designed for various interior applications such as prehung, pocket, barn, or French doors. It features a solid core MDF construction with tempered clear glass, offering durability and sound dampening properties. The door slab arrives triple-primed and fully assembled, ready for painting to match your interior decor.



A full view of the WINSTELLAR 36x80 3-Lite Prebuilt Interior Clear Glass Door Slab, showcasing its white frame and three clear glass panels.

## 2. Product Features


- **Product Dimensions:** Door Panel Width: 36 inches; Height: 80 inches; Thickness: 1.4 inches. Designed to fit openings (after jamb installation) of 36-1/4 inches x 80-1/2 inches, and rough openings (before jamb installation) of 38 inches x 82 inches.
- **Material Quality:** Constructed from solid core CARB P2 Certified MDF wood and thick tempered clear glass. The glass is SGCC certified, offering enhanced safety and scratch resistance.
- **Paintable Surface:** The door slab is triple-primed and fully assembled, providing a smooth, uniform surface ready for painting to customize its appearance.
- **Sound Dampening:** The solid core construction contributes to enhanced durability and noise reduction, making it suitable for various living spaces.
- **Versatile Application:** Suitable for use in living rooms, kitchens, bathrooms, pantries, bedrooms, and more, adaptable for prehung, pocket, barn, or French door installations.

# Prefinished Surface: Three-Layer Painting Technique

**Third Layer: Extra**  
Finish for Enhanced  
Smoothness and Durability

**Second Layer:**  
Primed for Perfection

**First Layer:**  
Water-Resistant  
Coating

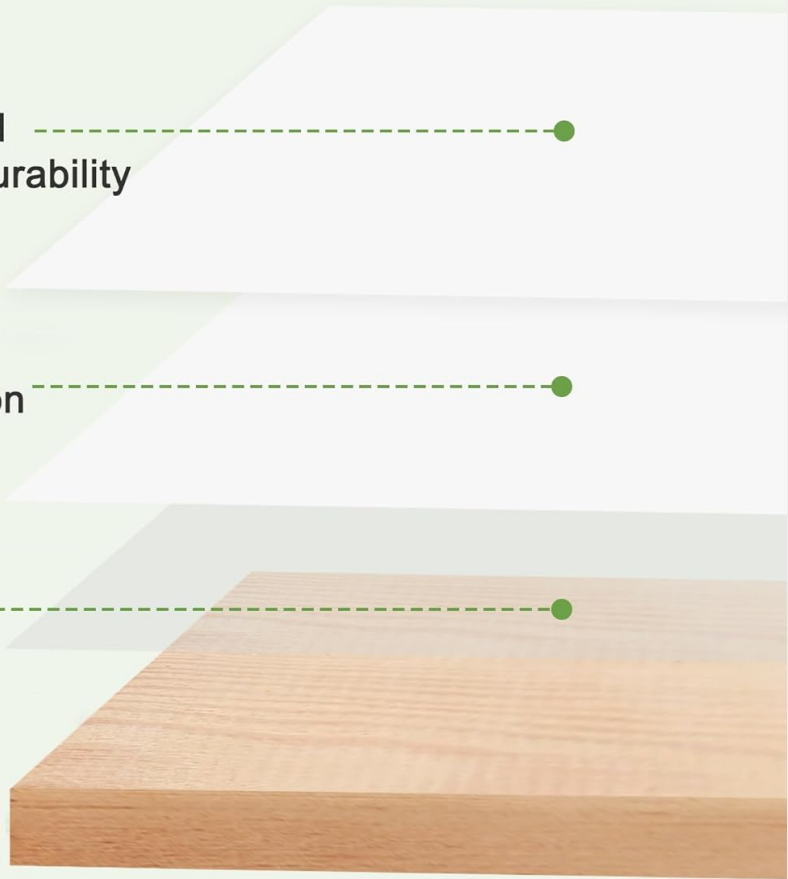

A diagram illustrating the three-layer painting technique: water-resistant coating, primed layer, and extra finish for smoothness and durability.

# 70% More Sound-Dampening Than Hollow Core



Ours



**Solid Core**



Others



**Hollow Core**


Visual comparison showing a solid core door providing better sound dampening for a quiet room, contrasted with a hollow core door and a person experiencing noise.

## 3. Setup and Installation

This door slab requires separate hardware for installation (e.g., pocket door frame, prehung door jamb, barn door track kit). Ensure you have all necessary components before beginning installation.

### 3.1 Pre-Installation Checks

- Verify that your door opening dimensions are compatible with the door slab size. Refer to the size guide image below.
- Ensure the floor is level and the walls are plumb for proper door operation.
- Gather all required tools, including a measuring tape, pencil, drill, and appropriate fasteners for your chosen hardware.

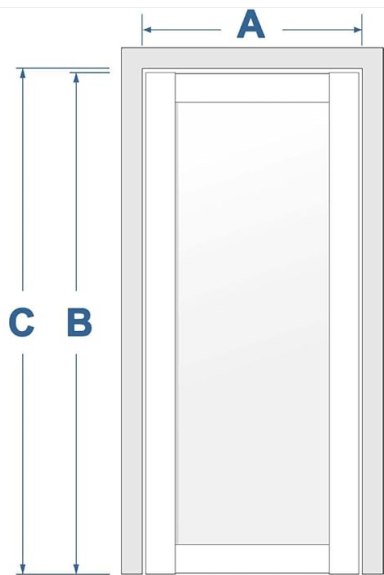

## Size Guide

Door Size	Fit Opening width ( A )	Fit Opening Height ( B : include Jamb )	Fit Opening Height ( C : Without Jamb )
24" x 80"	26"	80.5"	82"
28" x 80"	30"	80.5"	82"
30" x 80"	32"	80.5"	82"
32" x 80"	34"	80.5"	82"
36" x 80"	38"	80.5"	82"
24" x 96"	26"	96.5"	98"
28" x 96"	30"	96.5"	98"
30" x 96"	32"	96.5"	98"

A table detailing various door sizes and their corresponding fit opening widths and heights, both with and without jambs.

### 3.2 Installation as a Pocket Door

The following video demonstrates the installation of a WINSTELLAR door slab as a pocket door. This process involves attaching the door hangers and fitting the door into a pre-installed pocket door frame. Always follow the specific instructions provided with your pocket door hardware kit.

Your browser does not support the video tag.

This video demonstrates the process of installing a WINSTELLAR door slab specifically as a pocket door, including attaching the necessary hardware and fitting it into the pocket door frame.

### 3.3 General Steps (Refer to your specific hardware instructions)

- 1. Prepare the Door Slab:** If painting, apply your desired color to the triple-primed surface. Allow adequate drying time.
- 2. Attach Hardware:** Mark and pre-drill holes for door hangers, hinges, or other hardware according to your hardware kit's instructions. Securely attach all components to the door slab.
- 3. Install Door:** Carefully lift and position the door slab into its frame or onto the track system. Adjust as needed to ensure smooth operation and proper alignment.
- 4. Final Adjustments:** Check for smooth opening and closing. Make any necessary adjustments to hardware or alignment.

# PRE-ASSEMBLED PANELS

*Removing* the hassle of lengthy alignment and setup processes



Image showing a person in gloves handling a pre-assembled door panel, highlighting the ease of installation.

## 4. Operating Instructions

---



Once installed, operate your WINSTELLAR door slab by gently pushing or pulling it along its track or hinges. Avoid excessive force to ensure longevity of the door and hardware. For pocket or barn doors, ensure the path is clear of obstructions.

## 5. Care and Maintenance

---

- **Cleaning:** For the MDF surface, wipe with a soft, damp cloth. Avoid abrasive cleaners. For the clear glass panels, use a standard glass cleaner and a lint-free cloth.
- **Painting:** The door is pre-primed and ready for paint. Use high-quality interior paint for best results. Follow paint manufacturer's instructions for application and drying times.
- **Hardware:** Periodically check all installed hardware (hinges, rollers, tracks) for tightness and smooth operation. Lubricate moving parts if necessary, following the hardware manufacturer's recommendations.
- **Glass Protection:** While tempered glass is durable, avoid sharp impacts or extreme temperature changes to prevent damage.

# Durable MDF Surface

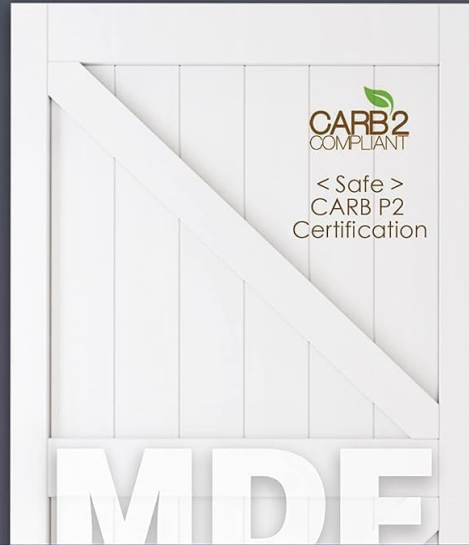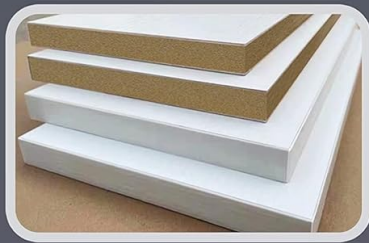

< Ready-to-use >  
Pre-finished  
Surface



< Sturdy >  
Harder than  
Natural Wood



Scratch Resistant



Water Resistant

An image highlighting the durable MDF surface of the door, featuring the CARB P2 certification for safety and quality, along with icons for ready-to-use, sturdy, scratch-resistant, and water-resistant properties.

## 6. Troubleshooting

- **Door sticks or rubs:** Check for proper alignment of the door within its frame or on its track. Adjust hardware as needed. Ensure no debris is obstructing the track.
- **Door does not close completely:** Verify that the frame is square and plumb. Check for any obstructions or misaligned hardware.
- **Glass appears cloudy or scratched:** Ensure you are using appropriate glass cleaner. For minor scratches, specialized glass repair kits may be available, but deep scratches may require professional attention or panel replacement.

## 7. Product Specifications

Attribute	Detail
Brand	WIN STELLAR

Model	36x80 3-Lite Clear Glass Door Slab
Color	Clear Glass
Material	Triple Primed CARB P2 Certified MDF & SGCC Certified Glass
Style	Modern
Assembly Required	No (Door slab is pre-assembled, hardware sold separately)
Item Weight	55 pounds
Product Dimensions	1.38 x 36 x 80 inches
Finish	Primed, Prefinished, Paintable

## 8. Warranty and Support

---

This product is eligible for a 30-day easy returns policy for refund or replacement. For any product-related inquiries, technical assistance, or support, please visit the official WIN STELLAR store on Amazon or contact customer support through the platform.

Visit the [WIN STELLAR Store](#) for more information and products.