

[Manuals.plus](#) /

› [AM.PM](#) /

› AM.PM Complete Wall-Hung WC Kit User Manual

AM.PM II12709, CPA1900SC, II90151

AM.PM Complete Wall-Hung WC Kit User Manual

Model: II12709, CPA1900SC, II90151

PRODUCT OVERVIEW

The AM.PM II12709, CPA1900SC, II90151 kit provides a comprehensive solution for a modern bathroom, combining a wall-hung WC with a soft-close seat, a robust wall-mounted frame, and a stylish chrome flush plate. This system is designed for minimalist aesthetics, hygiene, and efficient water usage.



Image: Complete AM.PM wall-hung WC kit including the toilet bowl, wall frame, and flush plate.

The kit is delivered in two separate packages for convenience. Please note that the toilet seat is designed to cover the bowl and is not intended for use as a standalone seat.

KEY FEATURES

Rimless Wall-Hung WC (CPA1900SC)

This rimless toilet bowl design minimizes dirt, germs, and bacteria accumulation, ensuring quick and easy cleaning. It represents a new generation of FlashClean rimless toilets, constructed entirely without plastic components for enhanced hygiene.

- **Hygienic Design:** Rimless bowl for superior cleanliness.

- **Dimensions:** Approximately 370 x 370 x 485 mm.
- **Material:** 100% plastic-free construction.

Design classique et moderne

Cuvette conique aux formes strictes et calibrées



Conçu par AM.PM Design, Allemagne

Image: The wall-hung WC showcasing its classic and modern design, designed by AM.PM Design, Germany.

AquaSpin

Le système de rinçage le plus efficace: les jets d'eau créent un effet de vortex qui permet un nettoyage plus complet de la cuvette



Économies d'eau
jusqu'à 50%



Image: Close-up of the AquaSpin flushing system, illustrating how water jets create a vortex for thorough bowl cleaning and up to 50% water savings.

Wall-Mounted Element (II12709)

The robust wall-mounted frame is designed for high durability and stability, suitable for all toilet bowls. Its slim profile makes it ideal for small bathrooms or guest toilets.

- **High Load Capacity:** WC hanging bars can support up to 400 kg.
- **Space-Saving Design:** Flat tank with a depth of 120 mm.
- **Silent Operation:** Features a silent fill valve (Class II according to EN 14124).
- **Enhanced Durability:** Increased profile thickness, reinforced water supply pipe, double drainage, and seals for water inlet.
- **Connection:** Water connection from the back, at the top.

Résistance et durabilité élevées

Profil plus épais, tuyau
d'alimentation en eau renforcé,
double joint d'étanchéité pour
le drainage et l'alimentation
en eau



Supporte jusqu'à
400 kg. Convient
aux toilettes
de toutes tailles



Image: The wall-mounted frame highlighting its high strength and durability, capable of supporting up to 400 kg.

Gain de place

grâce à l'étroitesse
de la cuve de 120 mm
de profondeur



Vanne de remplissage
silencieuse, Classe II selon
la norme européenne EN 14124



Image: The wall-mounted frame demonstrating its space-saving design due to the narrow 120 mm deep tank and silent fill valve.

Pour l'amour de la nature



Économise l'eau.
Respectueux
de l'environnement.
Chasse d'eau
de 4 à 5 litres



Image: The wall-mounted frame illustrating its water-saving and environmentally friendly features, with a 4 to 5-liter flush volume.

Round Chrome Dual-Flush Plate (II90151)

The included actuation plate offers dual-flush functionality for water conservation.

- **Flush Modes:** 3 L (small flush) and 6 L (full flush).
- **Material:** Made of durable plastic with a chrome finish.
- **Dimensions:** 240 x 160 mm.
- **Compatibility:** Exclusively compatible with AM.PM II12709 Prime Fit front panels.

Soft-Close Toilet Seat

The toilet seat features a soft-close mechanism for quiet and gentle closing, preventing slamming. It also includes a quick-release mechanism for easy removal and cleaning.

- **Soft-Close:** Automatic gentle lowering system.
- **Quick-Fix:** Easy installation and removal.
- **Material:** Duroplast.

Siège à fixation rapide

en Duroplast avec mécanisme de fermeture automatique en douceur



*Siège WC inclus



Image: The toilet seat highlighting its quick-fix attachment and soft-close automatic lowering mechanism.



Siège sandwich moderne

avec mécanisme de déverrouillage rapide
par simple bouton

Image: Close-up of the modern sandwich seat with its quick-release mechanism, activated by a simple button.

SETUP AND INSTALLATION

Installation of the AM.PM wall-hung WC kit requires professional plumbing knowledge. It is recommended to consult a qualified installer for proper setup to ensure optimal performance and compliance with local building codes.

Components Included:

- 1 x Rimless Wall-Hung WC (CPA1900SC)
- 1 x Soft-Close Toilet Seat
- 1 x Wall Element (II12709)
- 1 x Round Chrome Dual-Flush Plate (II90151)
- Necessary fixings, pipes, and sound insulation gasket.

Kit de livraison complet

comprenant toutes
les fixations nécessaires,
les tuyaux et le joint
d'insonorisation



Image: The complete delivery kit, including all necessary fixings, pipes, and the sound insulation gasket for installation.

Dimensional Drawings:

Refer to the following technical drawings for precise dimensions and installation requirements of the WC and the wall element.

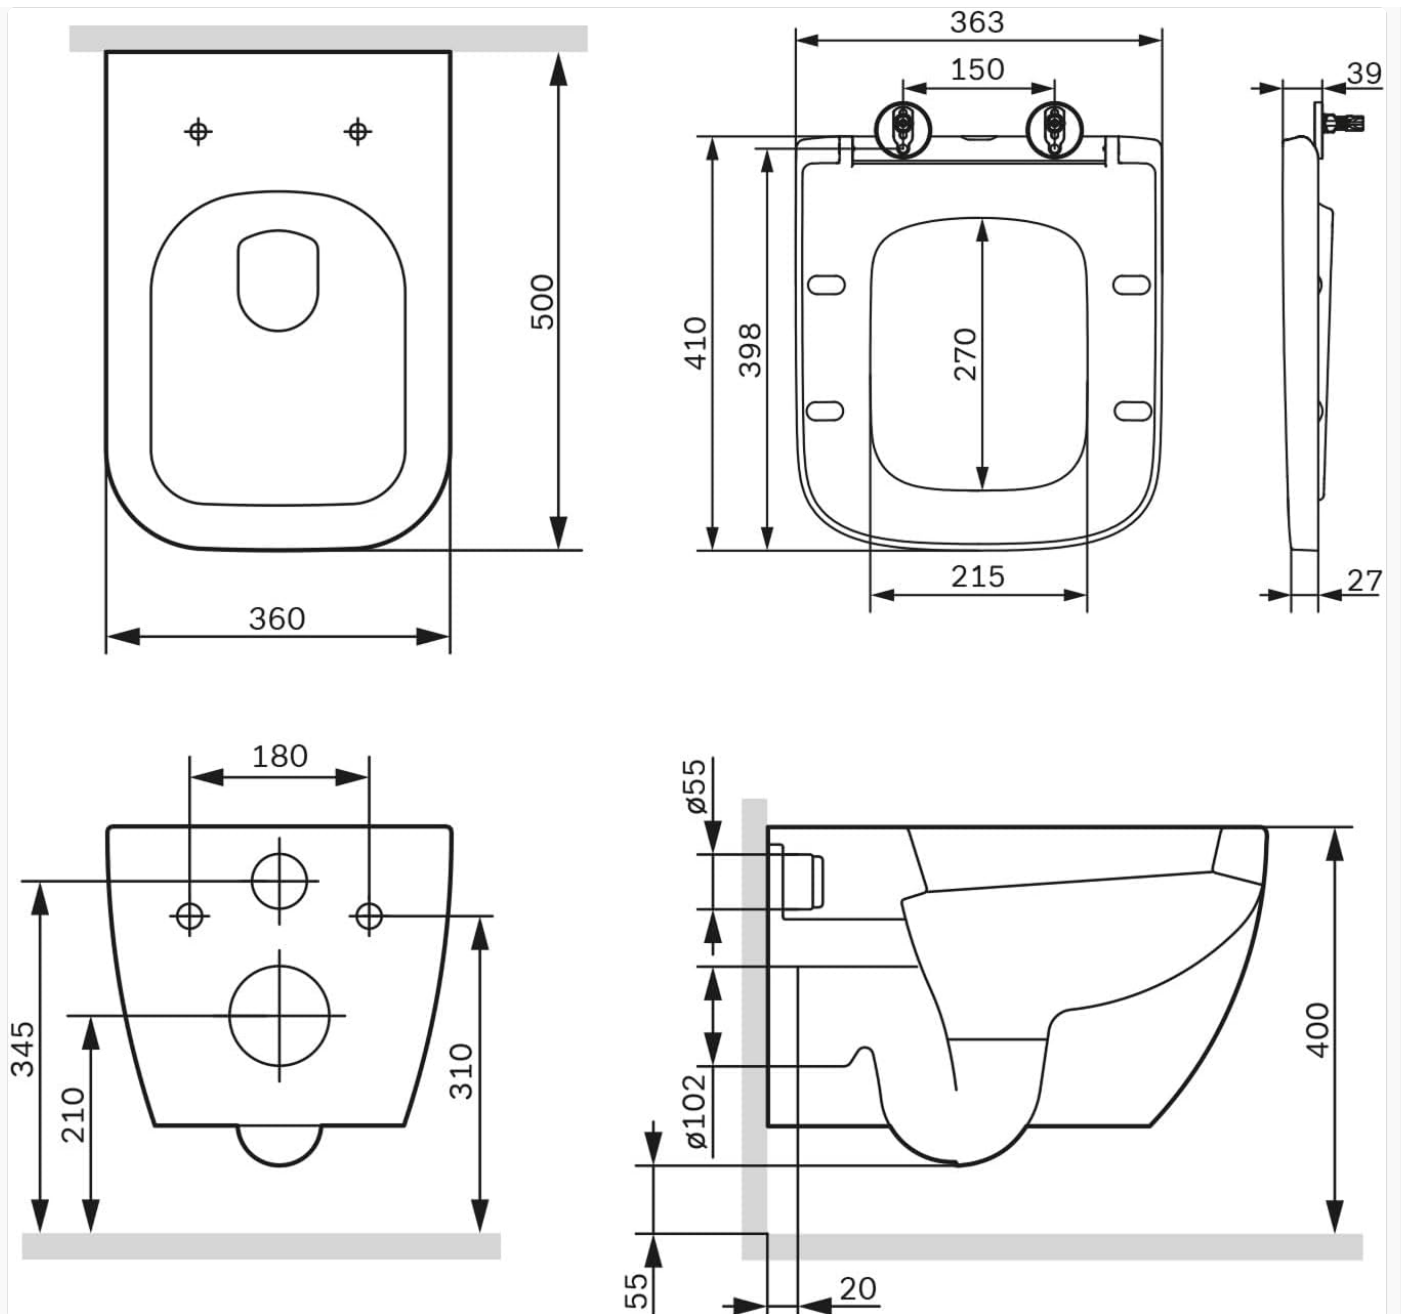


Image: Technical drawing detailing the dimensions of the wall-hung WC bowl and seat.

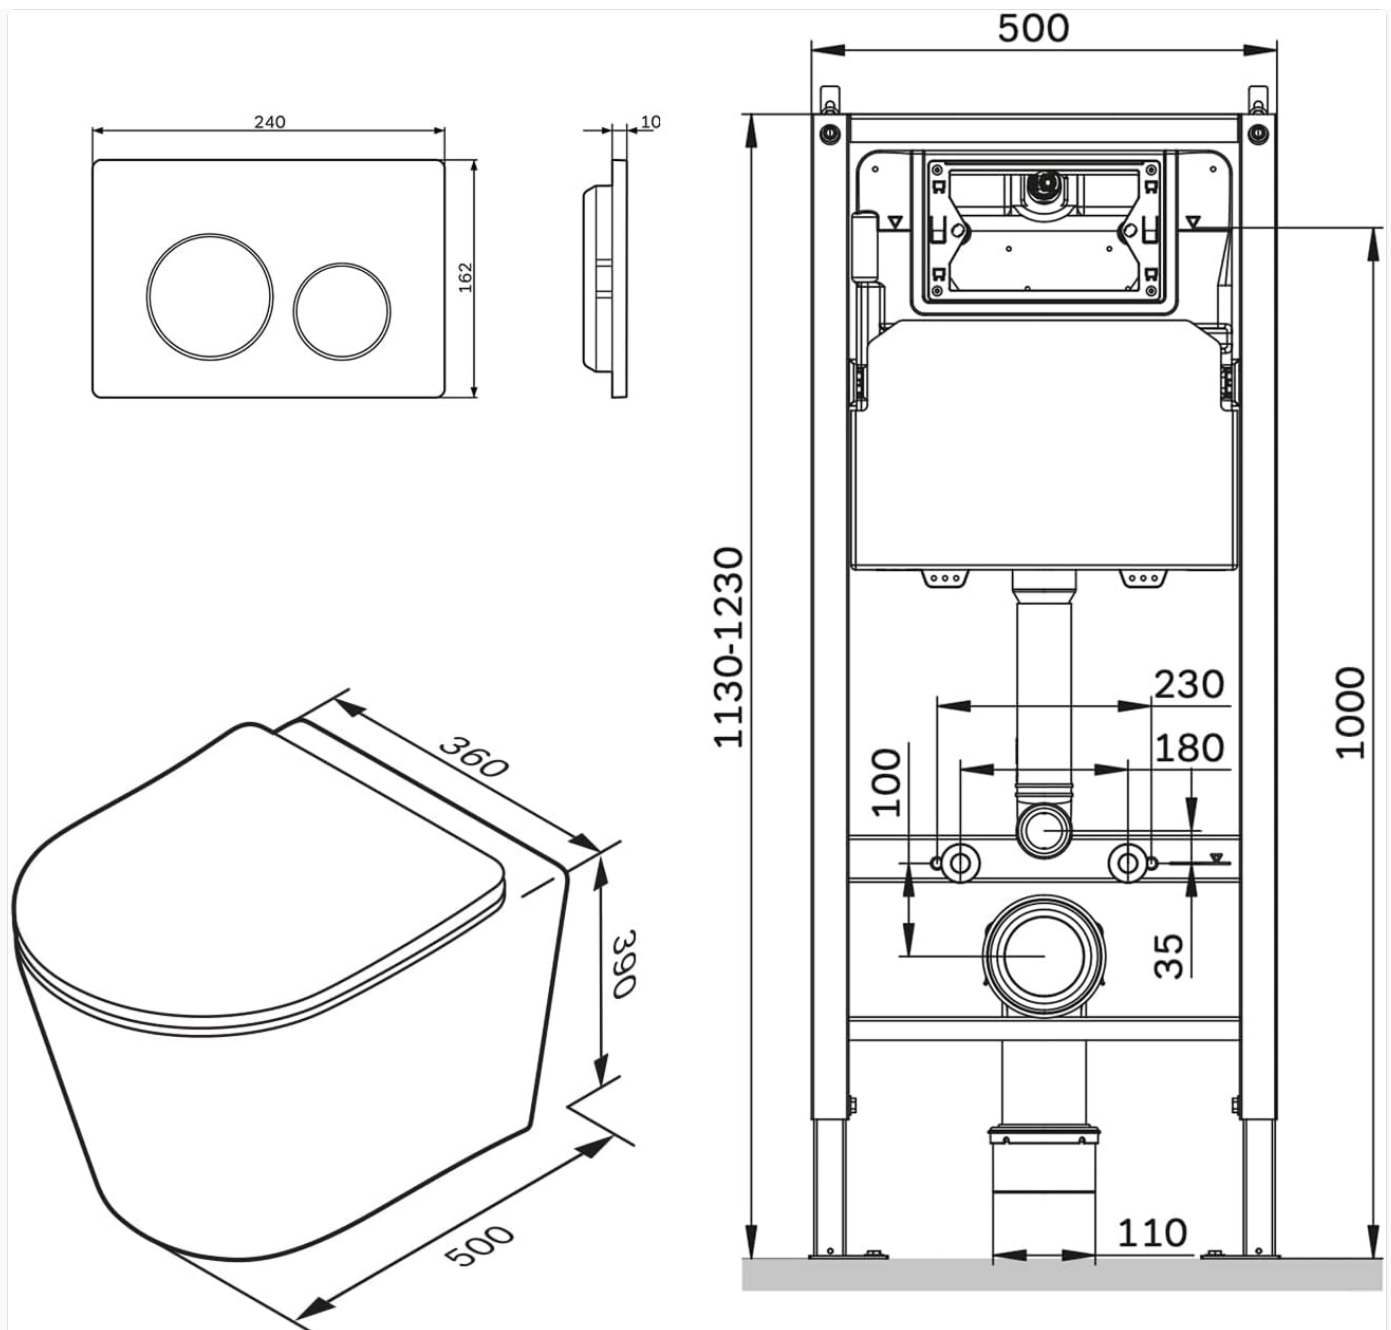


Image: Technical drawing illustrating the overall dimensions of the wall element, flush plate, and the installed WC.

OPERATING INSTRUCTIONS

The dual-flush plate allows for efficient water usage based on your needs.

- **Small Flush (3 L):** Press the smaller button on the flush plate for liquid waste.
- **Full Flush (6 L):** Press the larger button on the flush plate for solid waste.


The soft-close toilet seat will lower gently on its own. Avoid forcing it down, as this can damage the mechanism.

MAINTENANCE AND CARE


The glazed porcelain material of the WC is highly hygienic and resistant to humidity, making it incredibly easy to maintain.

Incroyablement facile à entretenir

La porcelaine émaillée, le matériau le plus hygiénique et le plus résistant à l'humidité



Vitrage parfait, même dans les zones non visibles



Résistant aux taches et aux odeurs

Image: Illustrates the easy-to-maintain features of the WC, including perfect glazing even in non-visible areas, and resistance to stains and odors.

- **Cleaning the WC Bowl:** Use mild, non-abrasive cleaners and a soft cloth or sponge. Avoid harsh chemicals, abrasive pads, or strong acids, as these can damage the porcelain glaze.
- **Cleaning the Toilet Seat:** Clean the Duroplast seat with mild soap and water. The quick-release mechanism allows for easy removal of the seat for thorough cleaning of both the seat and the bowl area.
- **Cleaning the Flush Plate:** Wipe the chrome flush plate with a soft, damp cloth. Do not use abrasive cleaners or scouring pads.
- **General Care:** Regularly check for any leaks or unusual noises from the wall element. Contact a professional if any issues arise.

TROUBLESHOOTING

This section provides general guidance for common issues. For complex problems, it is recommended to contact a qualified plumber or the manufacturer's support.

Problem	Possible Cause	Solution
Weak Flush	Low water pressure, partial blockage, or incorrect flush plate setting.	Check water supply valve. Ensure correct flush button is pressed. Inspect for blockages (professional assistance may be required).
Continuous Water Flow into Bowl	Faulty fill valve or flush valve seal.	Inspect the fill valve and flush valve for debris or wear. Replacement of parts may be necessary (professional assistance recommended).
Toilet Seat Does Not Soft-Close	Damaged soft-close mechanism or hinges.	Check hinges for damage. Ensure proper installation. If mechanism is faulty, replacement may be needed.
Unusual Noises from Wall Element	Water pressure issues, loose pipes, or internal component malfunction.	Contact a qualified plumber to diagnose and resolve the issue.

SPECIFICATIONS

Feature	Detail
Brand	AM.PM
Model Numbers	II12709 (Wall Element), CPA1900SC (WC), II90151 (Flush Plate)
Material (WC)	Porcelain
Material (Toilet Seat)	Duroplast
Installation Type	Wall Mount
WC Dimensions (L x W x H)	Approx. 500 x 360 x 390 mm
Wall Element Depth	120 mm (flat tank)
Wall Element Load Capacity	Up to 400 kg
Flush Plate Dimensions (W x H)	240 x 160 mm
Flush Volumes	3 L / 6 L (dual flush)
Fill Valve	Silent, Class II (EN 14124)

WARRANTY AND SUPPORT

AM.PM products are backed by manufacturer warranties to ensure your peace of mind.

- **WC Bowl and Wall Frame:** 5-year manufacturer's warranty.
- **Soft-Close Toilet Seat:** 5-year manufacturer's warranty.
- **Actuation Plate:** 2-year manufacturer's warranty.

For warranty claims, technical support, or spare parts inquiries, please contact AM.PM customer service or visit their official website. Keep your purchase receipt as proof of purchase.

For more information, you can visit the [AM.PM Brand Store on Amazon](#).

© 2025 AM.PM. All rights reserved.

This manual is for informational purposes only. Specifications are subject to change without notice.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question