## Parkside PHET 15 C2

# Parkside PHET 15 C2 Electric Stapler and Nailer User Manual

Model: PHET 15 C2

## 1. Introduction and Product Overview

The Parkside PHET 15 C2 is an electric stapler and nailer designed for various fastening tasks in decoration, crafts, and household projects. This tool offers comfortable single-hand operation and is compatible with standard staples and nails.




Figure 1.1: The Parkside PHET 15 C2 Electric Stapler and Nailer, showcasing its ergonomic design and integrated power cord.

### Key Features:

- Comfortable single-hand operation with a soft-grip, non-slip handle.
- Magazine with double-sided fill level indicator.
- Compatible with staples from 6 to 14 mm and nails from 14 to 15 mm.
- Lightweight and compact design for easy handling.
- Quick and convenient fastening for various applications.

## 2. Safety Instructions

Always observe basic safety precautions when using electric tools to reduce the risk of fire, electric shock, and personal injury. Read all instructions carefully before operation.

### General Safety:

- **Work Area Safety:** Keep your work area clean and well-lit. Cluttered or dark areas invite accidents. Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases, or dust.
- **Electrical Safety:** Power tool plugs must match the outlet. Never modify the plug. Avoid body contact with earthed or grounded surfaces (e.g., pipes, radiators, ranges, refrigerators).
- **Personal Safety:** Always wear eye protection. Use hearing protection when operating for extended periods. Dress properly; avoid loose clothing or jewelry. Keep hair, clothing, and gloves away from moving parts.
- **Tool Use and Care:** Do not force the power tool. Use the correct power tool for your application. Disconnect the plug from the power source before making any adjustments, changing accessories, or storing power tools.
- **Maintenance:** Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the power tool's operation.

## 3. Setup and Loading Fasteners

Before operating the stapler/nailer, ensure it is disconnected from the power supply. This section details how to load staples and nails into the magazine.

### Loading Staples and Nails:

1. Ensure the tool is unplugged from the power outlet.
2. Locate the magazine release mechanism, typically at the bottom front of the tool.
3. Slide open the magazine. The PHET 15 C2 features a soft-grip, non-slip magazine with a double-sided fill level indicator.
4. Insert the appropriate staples (6-14 mm) or nails (14-15 mm) into the magazine. Ensure they are oriented correctly, with the points facing forward. The magazine capacity is 100 staples or 50 nails.
5. Close the magazine securely until it clicks into place.

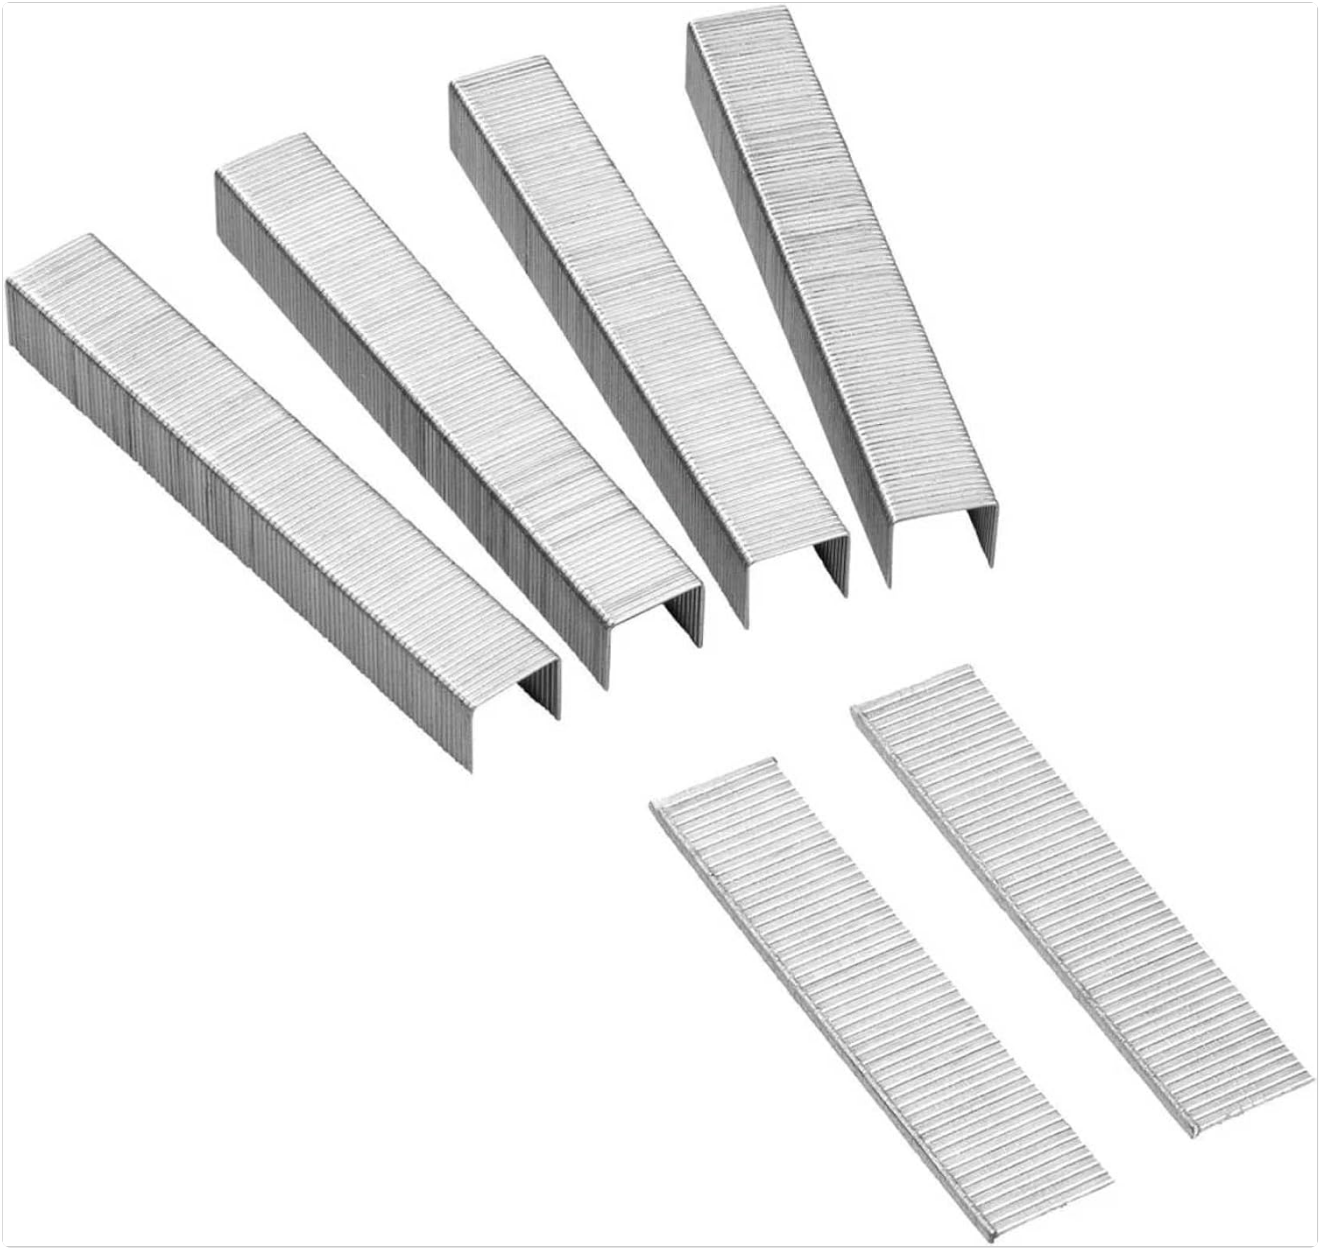


Figure 3.1: Examples of compatible staples and nails for the PHET 15 C2.






Figure 3.2: The underside of the tool, indicating the magazine for loading fasteners.

## 4. Operating Instructions

The Parkside PHET 15 C2 is designed for quick and convenient fastening. Follow these steps for safe and effective operation.

### Operating the Tool:

1. After loading fasteners, connect the tool to a suitable power outlet (220-240 V/50 Hz).

2. Hold the tool firmly with one hand, ensuring a secure grip on the soft-grip handle.
3. Position the nose of the stapler/nailer against the workpiece where the fastener is to be driven. Ensure the tool is perpendicular to the surface for optimal results.
4. Press the trigger to drive a staple or nail. The tool operates at a maximum of 20 operations per minute.
5. Release the trigger to stop operation.
6. Always unplug the tool when not in use or when changing fasteners.




Figure 4.1: Demonstrating the use of the stapler on a canvas frame, highlighting single-hand operation.




Figure 4.2: The stapler being used to fasten into a wooden board, showing proper tool positioning.

## 5. Maintenance

Regular maintenance ensures the longevity and optimal performance of your Parkside PHET 15 C2. Always unplug the tool before performing any maintenance.

### Cleaning and Storage:

- **Cleaning:** Wipe the tool's exterior with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners. Ensure no dust or debris accumulates in the magazine or firing mechanism.
- **Storage:** Store the tool in a dry, secure location, out of reach of children. Ensure the power cord is neatly coiled and not kinked.
- **Inspection:** Periodically inspect the power cord for any damage. If the cord is damaged, it must be replaced by a qualified service technician to avoid hazards.

## 6. Troubleshooting

This section provides solutions to common issues you might encounter with your electric stapler and nailer.

### Common Issues and Solutions:

- **Tool does not fire:**
  - Check if the tool is properly plugged into a working power outlet.
  - Ensure the magazine is loaded with the correct type and size of fasteners and is securely closed.
  - Verify that the safety switch (if present) is disengaged.
- **Fasteners do not drive fully:**

- Ensure you are using the correct fastener length for the material thickness.
- Apply firm, even pressure to the tool against the workpiece.
- Check for any debris or bent fasteners obstructing the firing mechanism.

- **Jammed fasteners:**
  - **Always unplug the tool first.**
  - Open the magazine and carefully remove any jammed or bent fasteners.
  - Inspect the firing channel for obstructions and clear them if necessary.

If problems persist after attempting these solutions, contact customer support or a qualified service technician.

## 7. Specifications

| Specification | Value |
|---|---|
| Model | PHET 15 C2 |
| Brand | Parkside |
| Voltage | 220-240 V / 50 Hz |
| Power | 70 W |
| Operations per Minute | Max. 20 |
| Staple Length Compatibility | 6-14 mm |
| Nail Length Compatibility | 14-15 mm |
| Staple Magazine Capacity | 100 units |
| Nail Magazine Capacity | 50 units |
| Dimensions (Stapler) | Approx. 18.2 x 5.6 x 15.5 cm |
| Power Cable Length | Approx. 3 m |
| Weight | Approx. 773g |
| Material | Metal |
| Operating Mode | Automatic |

## 8. Included Accessories

The Parkside PHET 15 C2 comes with the following accessories to get you started:

- 400 x 10 mm Staples
- 100 x 14 mm Nails

## 9. Warranty and Support

For warranty information and customer support, please refer to the documentation provided with your purchase or visit the official Parkside website. Keep your proof of purchase for any warranty claims.

© 2024 Parkside. All rights reserved. This manual is for informational purposes only.


### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question